

# RESISTANCE DECADE BOX


Model : RBOX-408

ISO-9001, CE, IEC1010

## FEATURES

\* Applications :

General applications  
Troubleshooting, maintenance  
Education and Vocational training  
Production line testing  
Radio and TV services  
Working standards  
Research design & develop  
Physics laboratory work

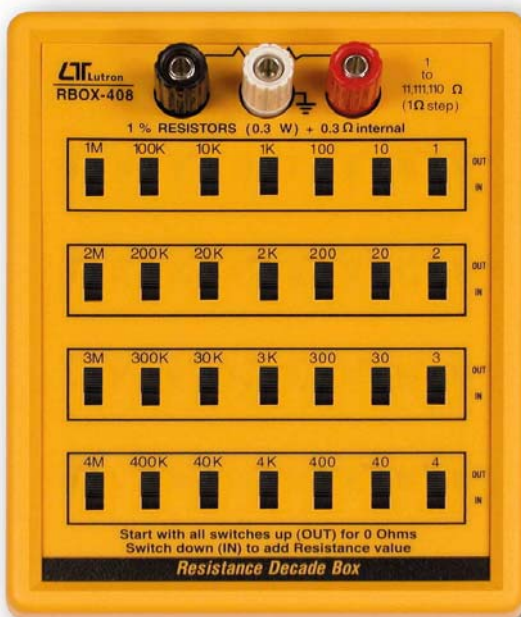

- \* Pocket size, offering accurate, reliable performance.
- \* 1 to 11,111,110 ohm, wide range and high resolution ( 1 ohm per step ), practical and versatile tools.
- \* With seven decades of resistance.
- \* Slide switches that allow the user to simply add or subtract for desired value.
- \* Terminals with multi way binding posts, one to switch shield case.



**Lutron**

**LUTRON ELECTRONIC**

***The Art of Measurement***

# RESISTANCE DECADE BOX

Model : RBOX-408

## FEATURES

\* Applications :

*General applications*  
*Troubleshooting, maintenance*  
*Education and Vocational training*  
*Production line testing*  
*Radio and TV services*  
*Working standards*  
*Research design & develop*  
*Physics laboratory work*

\* Pocket size, offering accurate, reliable performance.

\* 1 to 11,111,110 ohm, wide range and high resolution ( 1 ohm per step ), practical and versatile tools.

\* With seven decades of resistance.

\* Slide switches that allow the user to simply add or subtract for desired value.

\* Terminals with multi way binding posts, one to switch shield case.

\* ABS plastic housing case, rugged components.

## SPECIFICATIONS

|                           |   |
|---------------------------|---|
| Range                     | 1 to 11,111, 110 ohm ( 1 ohm per step )                     |
| Accuracy                  | 1% resistors used throughout.                               |
| Wattage                   | 0.3 W.  |
| Internal Stray Resistance | 0.3 ohm max.  |
| Power Supply              | None  |
| Operating Temperature     | 0 to 50 °C (32 to 122 °F).                                  |
| Operating Humidity        | Less than 80% RH.   |
| Weight                    | 320 g/0.70 lb.  |
| Dimension                 | 14.7 cm x 11.7 cm x 5.5 cm.<br>( 5.79 x 4.61 x 2.16 inch ). |
| Accessories               | Operation Manual..... 1 PC.                                 |

## OPERATION PROCEDURE

- 1) Start with all switches up ( OUT ) for 0 ohms.
- 2) Switch down ( IN ) to add Resistance value.

\* Appearance and specifications listed in this brochure are subject to change without notice.

0604-RBOX408