



Type PFP

3.0ØX9.5mm

Ceramic Tube Fuse With Pig-Tail Series



Approvals

UL Listed 50mA~8A
CSA Certified 50mA~8A

Electrical Characteristics

Rated Current	1 In	2 In
	MIN	MAX
50mA ~15A	4Hrs	60 Sec

Interrupting Ratings

50 amperes at 125V AC. 300 amperes at 125V DC.

Environmental Specification

Operating Temperature

-55°C to +125°C

Shock

MIL-STD-202, Method 213, Condition 1
(100G's peak for 6 milliseconds)


Vibration

MIL-STD-202, Method 201(10-55 Hz); Method 204,
Test Condition C (55-200 Hz at 10G's Perk).

Salt Spray

MIL-STD-202, Method 101, Test Condition B (48Hrs)

Mechanical Dimensions

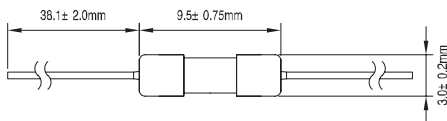

Physical Specification

Materials


Ceramic Tube with Heart Shrink Tubing Over Body.
Lead Wire: Tin-lead Plated Copper
Diameter Ø0.65 mm for 10A and less.
Diameter Ø0.8 mm for rating above 10A .

Packaging


In Bulk: 1,000pcs per box

CAP-ON LEAD WIRE:


FOR 3.6mm FUSES - CP3001

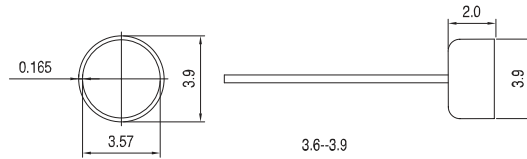


FOR 4.5mm FUSES - CP4001

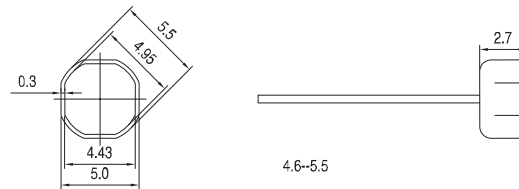

FOR 5mm FUSES - CP5001

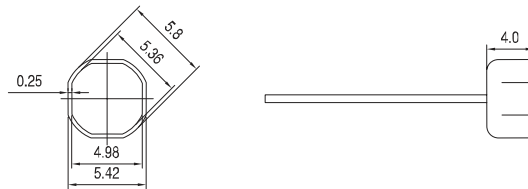

FOR 5mm FUSES - CP5002

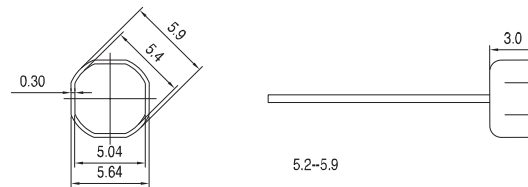

FOR 6.3mm FUSES - CP6001

