

# Specification Guide Codes:

**A= Item Number**

**B= Insertion & Extraction Force**

**C= Dielectric Strength For 60 Sec**

• Special Design Also Available. For Details Please Contact Factory.

• Use UL Approved Materials • Low Cost • Low Contact Resistance • Flame Retardant.

**D= Suitable Rated Current**

**E= Insulation Resistance At500VDC**

**F= Temperature Rise**


**G= Voltage Drop**

## FUSE BLOCKS FOR 5x20mm FUSES




### CQ-200I

**B:** 1Kg.Min.  
**C:** AC2000V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

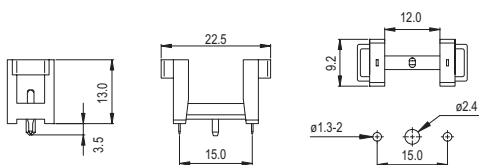


### CQ-200M

**B:** 1Kg.Min.  
**C:** AC2000V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

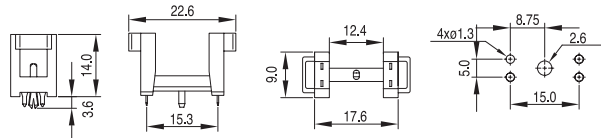


## FUSE BLOCKS FOR 1/4x1-1/4( 6.3x32mm) FUSES




### CQ-201N

**B:** 1.5Kg.Min.  
**C:** AC3000V Min.  
**D:** 30A250V  
**E:** 500MΩ Min  
**F:** 60°C Max.  
**G:** 20mV Max.  
Terminal Shape:I,F,L,R,S

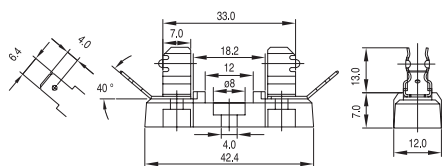

### CQ-201N-A

**B:** 1.5Kg.Min.  
**C:** AC3000V Min.  
**D:** 30A250V  
**E:** 500MΩ Min  
**F:** 60°C Max.  
**G:** 20mV Max.  
Terminal Shape:I,F,L,R,S

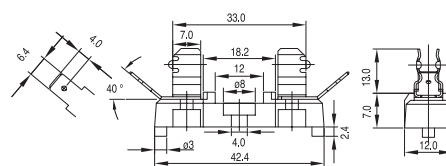


79

Conquer Electronics Co., Ltd.



### CQ-201H

**B:** 1Kg.Min.  
**C:** AC500V Min.  
**D:** 10A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

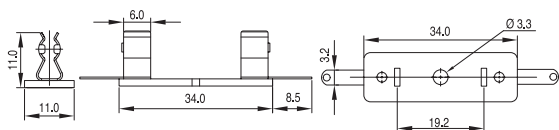

### CQ-201V

**B:** 1Kg.Min.  
**C:** AC500V Min.  
**D:** 10A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

