


EASYHOLD

FASTENING SYSTEMS

- Electricians
- Plumbers
- D.I.Y.s


ARE A MULTI-PURPOSE MUST!
Ideally suited for fixing cables / pipes in mortar
Made from Super Tough Nylon

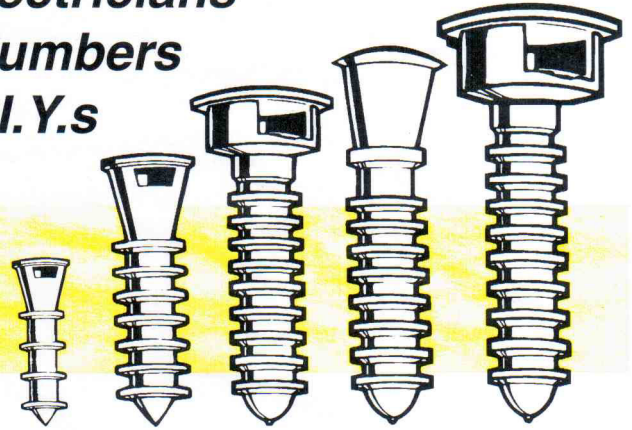


EASYHOLD FASTENING SYSTEMS - S.A.B.S. TESTED

NEW

EASYHOLD MINI 5




Hole size:- 5 mm

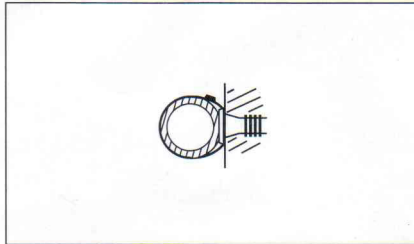


1. Drill 5 mm hole in position.
2. Hit mini 5 in with a hammer.
Place cable/pipe (or fixture) on plughead, secure with cable tie.
Recommended size T18R (104 x 2.5 mm).
Or use as a mini anchor.
- Ideal for multiple mini-fixing applications.

Best suited for fixing cables/pipes up to 10 mm diameter

EASYHOLD MINIPLUGS




Hole size:- 6 - 7 mm

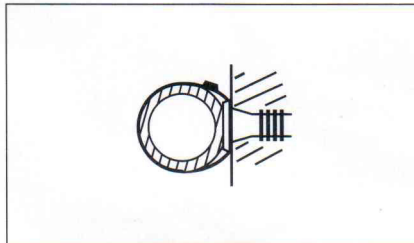


1. Drill required hole size.
2. Hit miniplug in with a hammer.
Place cable/pipe (or fixture) on plughead, secure with cable tie.
Recommended size T30R (150 x 3.5 mm).
Or use as a mini anchor.
- Ideal for multiple mini-fixing applications.

Best suited for fixing cables/pipes up to 20 mm diameter

EASYHOLD PLUGS

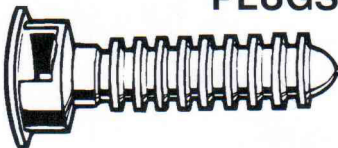


Hole size:- 8 mm

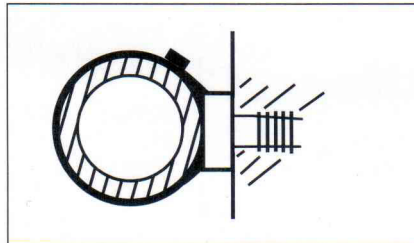


1. Drill 8 mm hole.
2. Hit plug in with a hammer.
Place cable/pipe (or fixture) on plughead and secure with cable tie.
Recommended size T50R (205 x 4.7 mm).
- Can withstand pullout force of up to 100 kgs.

Best suited for fixing cables/pipes between 20 - 40 mm diameter

EASYHOLD ANCHORS

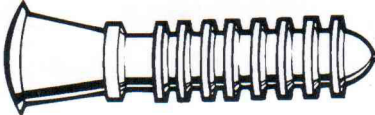


Hole size:- 8 mm

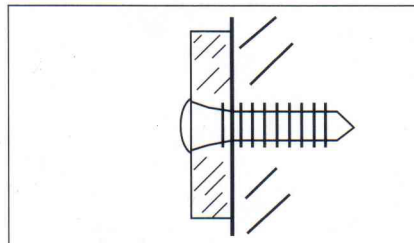


1. Drill 8 mm hole through both materials.
2. Hit anchor in with a hammer.
- Ideal for multiple fixing applications.

NEW

EASYHOLD MAXIPLUGS

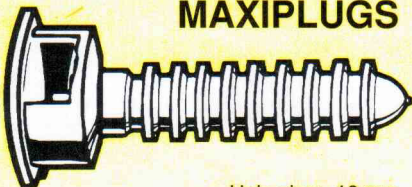

Hole size:- 10 mm

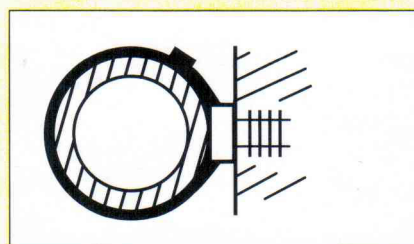

1. Drill 10 mm hole size.
2. Hit maxiplug in with a hammer.
Place cable/pipe (or fixture) on plughead, secure with cable tie.
Recommended size T120R (395 x 7.8 mm)
- Can withstand pullout force of up to 110 kgs.

Best suited for fixing cables/pipes between 30 - 100 mm diameter