

# CONQUER In-Line Fuse Holder



# Specification Guide Codes:

**A** = Item Number

**B** = Rated Current

**C** = Insulation Resistance At 500 V DC

• Contact : Brass, Tin / Nickel Plated

• With Other Wire Size Or Lengths Available On Special Order.

• To Install Fuses With "Loop" Type Wires, Simply Cut Loop Into Two Separate Wires Of Desired Length.

**D** = Contact Resistance

**E** = Dielectric Strength For 60 Seconds

**F** = Body Material

**G** = Supply Standard UL Wire-AWG/Length

## IN-LINE FUSE HOLDER FOR 1/4"x1-1/4" (6.3x32mm or 6.3x30mm) FUSES



**CQ-209F4**

RoHS

**B:** 20A

**C:** 100MΩ Min


**D:** 5mΩ At 1A DC

**E:** AC1500V Min.

**F:** Nylon

**G:** 12#AWG / 8"Loop

**Hinged Body Type**

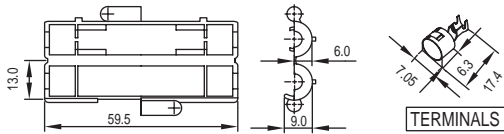

**CQ-209F5**

**B:** 20A

**C:** 100MΩ Min

**D:** 5mΩ At 1A DC


**E:** AC1500V Min.

**F:** Nylon

**G:** 14# To 18#AWG

**Screw Type**

For 1/4"x(7/8" To 1-1/4") Fuses

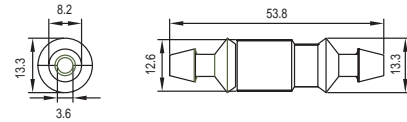

**CQ-209P**

RoHS

**B:** 5A

**C:** 100MΩ Min


**D:** 5mΩ At 1A DC

**E:** AC1000V Min.

**F:** P.P.

**G:** 18#AWG / 8"Loop

**Bayonet Type**

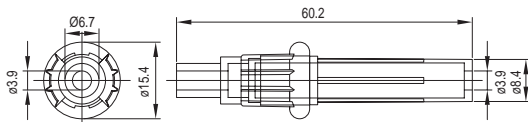

**CQ-209V**

RoHS

**B:** 40A

**C:** 100MΩ Min


**D:** 5mΩ At 1A DC

**E:** AC2000V Min.

**F:** Nylon With Fiber Glass

**G:** 12#AWG / 8"Loop

**Heavy Duty Bayonet Type**

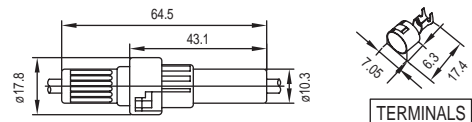

**CQ-210**

**B:** 20A

**C:** 100MΩ Min


**D:** 5mΩ At 1A DC

**E:** AC2000V Min.

**F:** Bakelite

**G:** 12#AWG / 8"Loop

**Screw Type**

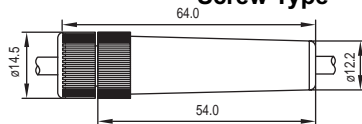

## IN-LINE FUSE HOLDER FOR AUE (5AG) FUSES



**CQ-228**

**B:** 60A

**C:** 100MΩ Min

**D:** 5mΩ At 1A DC


**E:** AC1000V Min.

**F:** Bakelite

**G:** 8#AWG / 8"Loop

For 10 x 38mm Fuse

**Screw Type**



88

Conquer Electronics Co., Ltd.

Conquer Electronics Co., Ltd.

No. 26, Wucyuan 5th Road, Wugu Township, Taipei County 248, Taiwan. TEL: 886-2-8990-2189 (Rep.) FAX: 886-2-8990-2577

E-mail: conqfuse@ms62.hinet.net Homepage: http://www.conquer.com.tw