MORNSUN®

KC24RT Series

CONSTANT CURRENT GREAT POWER LED DRIVER

RoHS

FEATURES

- SMD Package, simple and convenient
- High efficiency up to 96%
- Ultra wide range voltage input and output
- Constant current mode, great power output
- AC-DC, EMC recommended circuit
- PWM dimming & Analogue dimming
- Remote ON/OFF, Continuous short circuit protection
- RoHS and UL Compliance

APPLICATIONS

The KC24RT is a series of step-down constant current source designed for driving high power LEDs. It features high efficiency, wide input voltage range, high operating temperature, PWM and analogue dimming, remote ON/OFF control, and SMD package which facilitates the installation. It is widely used in LED illumination areas such as decorative light, special control light, backlight, commercial light, streetlight, in-house light and car light, etc.

MODEL SELECTION KC24RT-350 Output Current Package Style Input Voltage Product Series

MORNSUN Science & Technology Co.,Ltd. Address: 2th floor 6th building, Huangzhou


Industrial District, Guangzhou, China Tel: 86-20-38601850

PRODUCT ITEM										
Part Number	Input Voltage(V)		Output		Dimming	Efficiency				
	Normal	Range	Voltage (VDC)	Current (mA)	control	(%)				
KC24RT -300	24	5.5-48	3.3-36	0-300	PWM+Analogue	96				
KC24RT -350	24	5.5-48	3.3-36	0-350	PWM+Analogue	96				
KC24RT-500	24	5.5-48	3.3-36	0-500	PWM+Analogue	96				
KC24RT -600	24	5.5-48	3.3-36	0-600	PWM+Analogue	96				
KC24RT -700	24	5.5-48	3.3-36	0-700	PWM+Analogue	96				

SPECIFICATIONS							
Item	Test condition		Min.	Тур.	Max.	Units	
Utmost input voltage	≤10 seconds		5		55	VDC	
Recommended input voltage			5.5	24	48	VDC	
Input filter				Cap	acitor		
Output voltage range	put voltage range Vin=48V				36	VDC	
Output current range	See the product item						
Output current accuracy	± 2		± 2	±3	0/		
Output current stability	Vin=48V, Vo=3.3V~36	V			±1	- %	
Internal power dissipation	Vin=24V,5LEDS				700	mW	
Temperature coefficient	-40 °C to+71 °C ambie	ent			± 0.015	%/°C	
Efficiency at full load					96	%	
Ripple & Noise (Vp-p)					120	mV	
Short circuit protection			Continuous,automatic recov			recovery	
Operating temperature range	300mA / 350mA		-40		85		
Operating temperature range	500mA/ 600mA/ 700m	ıΑ	-40		71	°C	
Storage temperature range			-55		125	C	
Maximum case temperature					100		
Maximum capacitive Load				1000		μF	
Operating frequency range			320	370	420	kHz	
MTBF	MIL-HDBK-217F(+25°C	C)	2	,000,00	0	Hours	
Case Material			Epoxy Resin (UL94			1-V0)	
Dimensions			23.86*18.10*8.00			mm	
Weight			6			g	
PWM Dimming and ON/OFF	Control (leave open if	not us	sed)				
Remote ON/OFF	ON		Open or 2.8V <vc<6v< td=""></vc<6v<>				
Tremote Of Vol 1	OFF(shutdown)		Vc<0.6V				
Remote pin current	Vc=5V				1	mA	
Quiescent input current in Shutdown mode	Vin=24V, V _c <0.6V			400		μΑ	
PWM frequency					200	Hz	
Analogue dimming (leave o	pen if not used)						
Input voltage range	Vin=5.5-48V			0	-15V		
Output current range	Vin=5.5-48V		0%-100%				
	Full on		0.2V±50mV				
Control voltage range	Full off		4.5V±50mV				
Driving current	Vc=5V			0.2mA(max)			
EMC(Refer to Figure 5)							
Conducted/Radiated	EN55022, CLASS B						
ESD	IEC/EN 61000-4-2 level 3		(6KV/8KV) CLASS		3		
Radiated Immunity	IEC/EN 61000-4-3		(10V/m) CLASS E			3	
EFT	IEC/EN 61000-4-4 le	vel 3	(±2KV)	CLASS E	3	
Surge	IEC/EN 61000-4-5 le	vel 3	(±1KV)	(CLASS E	3	
Conducted Immunity	IEC/EN 61000-4-6		(10Vr. r	ns) C	LASS B		

INPUT VS	OUTPUT						
Input voltage	Output voltage range(VDC)	Output constant current (mA)	Output power (W Max)	Input voltage (VDC)	Output voltage range(VDC)	Output constant current (mA)	Output pov (W Max)
48	3.3-36.0	300	10.80	48	3.3-36.0	350	12.60
36	3.3-32.0	300	9.60	36	3.3-32.0	350	11.2
24	3.3-21.0	300	6.30	24	3.3-21.0	350	7.35
20	3.3-17.0	300	5.10	20	3.3-17.0	350	5.95
15	3.3-13.2	300	3.96	15	3.3-13.2	350	4.62
12	3.3-10.0	300	3.00	12	3.3-10.0	350	3.50
5.5	3.3-4.0	300	1.20	5.5	3.3-4.0	350	1.40
48	3.3-36.0	500	18.00	48	3.3-36.0	600	21.60
36	3.3-32.0	500	16.00	36	3.3-32.0	600	19.20
24	3.3-21.0	500	10.50	24	3.3-21.0	600	12.6
20	3.3-17.0	500	8.50	20	3.3-17.0	600	10.2
15	3.3-13.2	500	6.60	15	3.3-13.2	600	7.92
12	3.3-10.0	500	5.00	12	3.3-10.0	600	6.00
5.5	3.3-4.0	500	2.00	5.5	3.3-4.0	600	2.40
48	3.3-36.0	700	25.20				
36	3.3-32.0	700	22.40				
24	3.3-21.0	700	14.70				
20	3.3-17.0	700	11.90				
15	3.3-13.2	700	9.24				
12	3.3-10.0	700	7.00				
5.5	3.3-4.0	700	2.80				

TYPICAL APPLICATION CIRCUITS

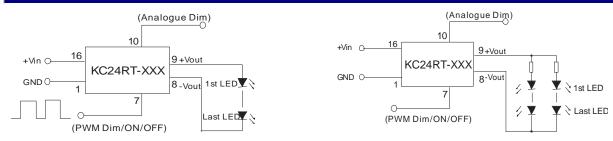


(Figure 1) Series Application

(Figure 2) Parallel-series Application

If it is necessary to protect LED in actual application, you could connect a PTC to the input of every channel or all channels, as shown in Figure 2.

Note: The negative output terminal can't connect GND, or the module may be damaged.

DIGITAL DIMMING CONTROL

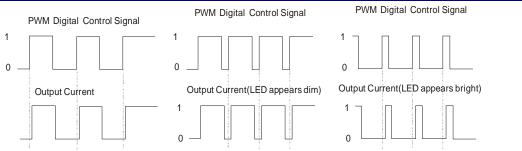

For the rated frequency PWM dimming, the output current of driver matters to the pulse width of the PWM signal, and the numerate please refer to the following formula:

$$I_{o_set} = \frac{(DT-0.6)}{T} I_{o_norm}$$


Io_set refers to the expected output current value.

D refers to the pulse width of the PWM signal


Io_norm refers to the rated output current T refers to the cycle of the PWM signal

Note: The formula only supplies as a reference, and the output current may be a little deviation with different load. The Ton(min) of PWM signal must be greater than 0.7ms, or the driver can't be operated normally. It is natural for the driver to generate an audibly noise in dimming process, because the frequency of the control circuit is within human audibly range (20Hz~20KHz).


ANALOGUE DIMMING CONTROL AND APPLICATION EXAMPLE

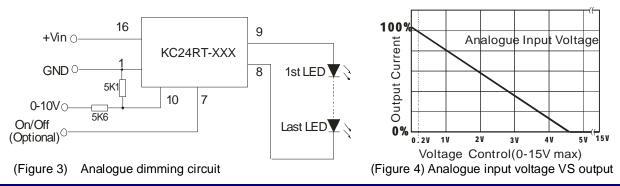


EMC RECOMMENDED CIRCUIT

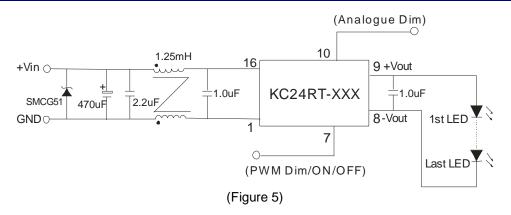



AC INPUT RECOMMENDED CIRCUIT

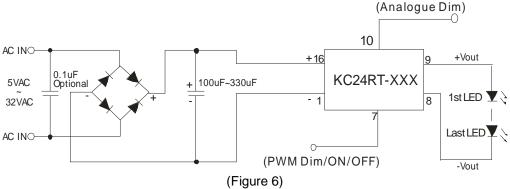


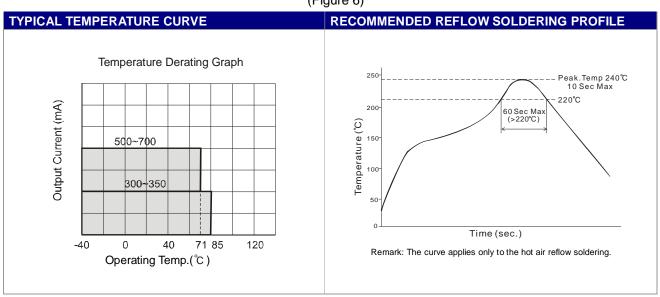


CHARACTERISTICS CURVE

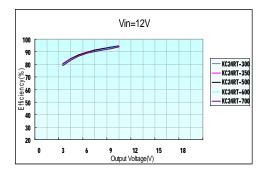


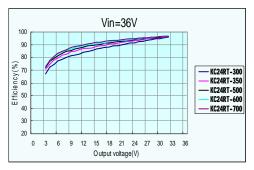


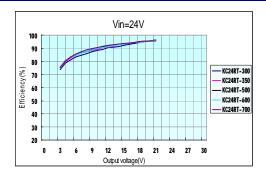

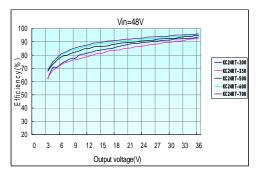

OUTLINE DIMENSIONS & PIN CONNECTIONS

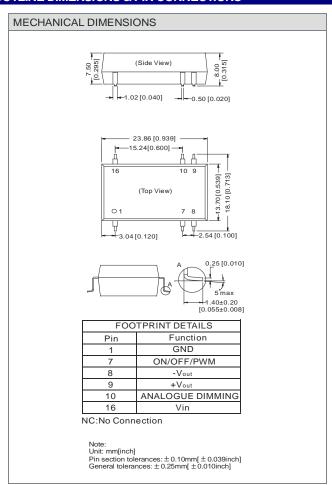

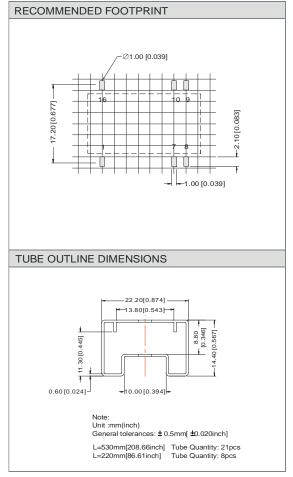

Note:

- 1. Operation under minimum output voltage will not damage the converter; However, they may not meet all specification listed.
- 2. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- 3. Only typical models listed, other models may be different, please contact our technical person for more details.
- 4. In this datasheet, all the test methods of indications are based on corporate standards.