



# HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: info@hahn-trafo.de




## Data sheet: BV EI 304 2084

Size 4 a: height 27.0 mm	2,1 VA	ta 70/F	BV EI 304 ...
--------------------------	--------	---------	---------------

Several hundreds of types provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

absolutely short-circuit-proof	
<b>minimal size</b>	
test certifications to ENEC 10-, VDE, UL- and CSA-regulations	
<b>vacuum encapsulated, bobbin with dual chamber windings</b>	
temperature class ta 40°C/F and ta 70°C/F	
<b>high electrical safety and long service-life properties</b>	
individually tested with certificate	
<b>excellent temperature fluctuation resistance properties</b>	
self-extinguishing cast housing and sealing material	

Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 304 2084	2,1	230	1-5	18 V 117 mA	7-9	30,0

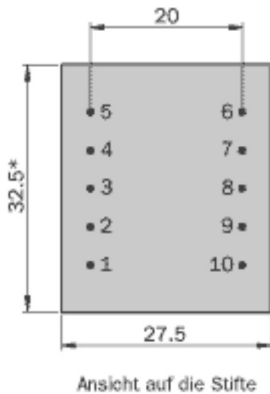

Maße ohne Toleranzangabe ± 0,3 mm.  
Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.