
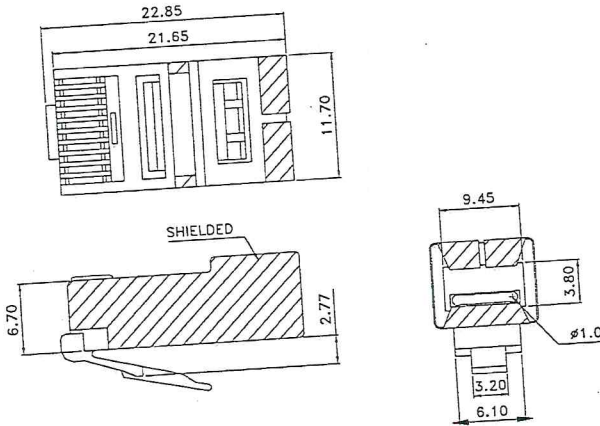


Modular Plug With Shielded

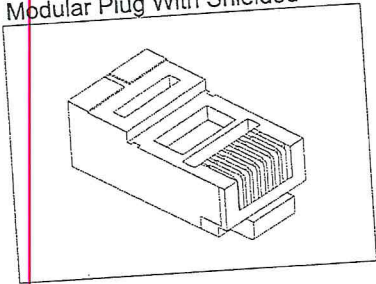

SPECIFICATIONS:

Current rating: 1.0A AC,DC
 Voltage rating: 150V AC,DC
 Contact resistance: 20M Ω max
 Insulation resistance: 1000M Ω min
 Withstanding voltage: 500V AC/minute
 Temperature range: -25 $^{\circ}$ C to +125 $^{\circ}$ C

MATERIAL:

Insulator: PC. UL94V-0
 Contact: Copper Alloy
 Finish: Gold Plated



ORDERING INFORMATION:

7001-XPXC-M



UNIT : mm

H:14.5mm X L:15mm Flange Modular Jack

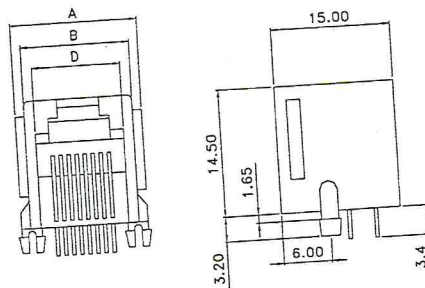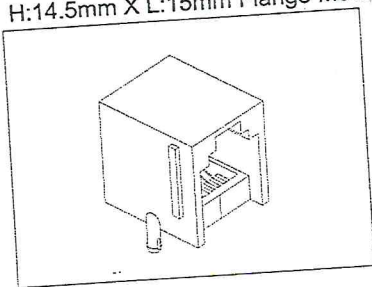

SPECIFICATIONS:


Current rating: 1.0A AC,DC
 Voltage rating: 150V AC,DC
 Contact resistance: 20M Ω max
 Insulation resistance: 1000M Ω min
 Withstanding voltage: 500V AC/minute
 Temperature range: -25 $^{\circ}$ C to +125 $^{\circ}$ C

MATERIAL:

Insulator: PBT UL94V-0
 Contact: Phosphor Bronze
 Finish: Gold Plated

ORDERING INFORMATION:

7002-XPXC



NO. OF POSITIONS	NO. OF CONTACTS	DIM.			
		A	B	C	D
4	2/4	14.20	12.20	12.00	7.90
6	2/4/6	14.20	12.20	12.00	7.90
8	6/8	17.00	15.00	15.00	9.90

UNIT : mm

COPY RIGHT RESERVED 2002-2005