

CHN 60P

P156x156

High Performance 60 Cell Poly crystalline
156x156mm
Solar Photovoltaic Module



220W 260W

CHINALAND SOLAR ENERGY
www.chnland.com



We focus on precise production and provide Customer with best cost-effective products to create Market Value for Customer

CHN 60P 220W/230W/235W/240W/245W/250W/255W/260W

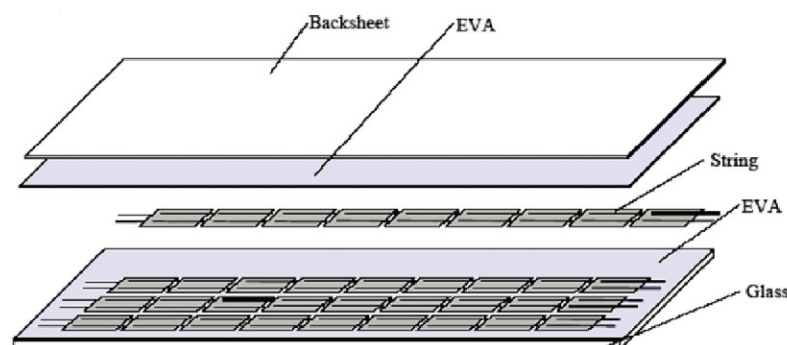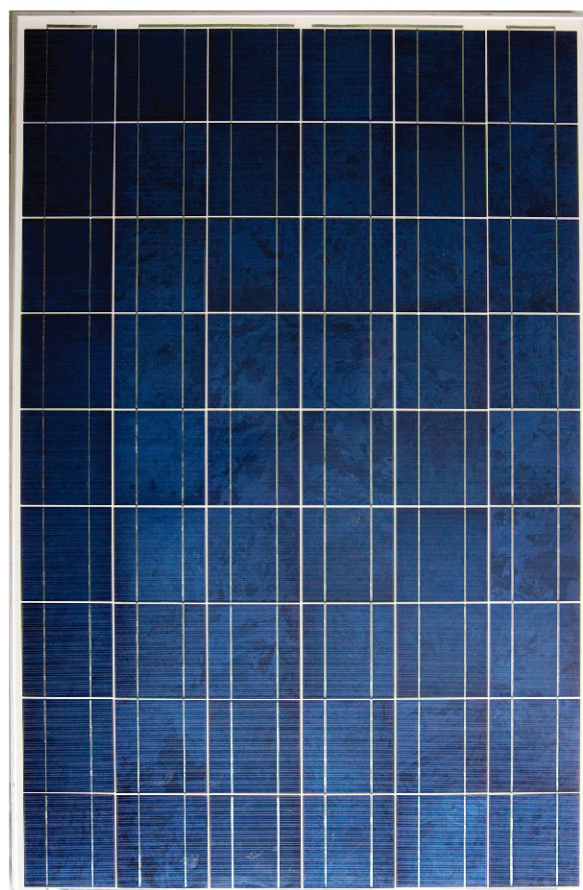

- Power tolerance (0~+3%) to ensure the high reliability of power output
- Modules certified by TUV to with stand high level of wind loads (2400 Pa) and snow loads(5400 Pa)
- Special PV Module Insurances by world leading insurance company guarantees the benefit of PV investors and PV module users
- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"

Guaranteed Performance**

10 Years Manufacturing Warranty

12 Years Warranty 90% Power Output


25 Years Warranty 80% Power Output

Free module recycling through membership in the Ceres Cycle Association

choosing chinaland solar

- The most vertically integrated solar manufacturer in the industry with production of ingots, wafer, solar cells and modules using both mono crystalline and multi crystalline technology.
- Global distribution with local warehousing, delivery and after sales services.
- Modules certified by global testing facilities: IEC61215, IEC61730, CE, ROHS.
- Manufacturing with international quality standards and environment management system: ISO9001 and ISO14001.
- Most updated design with drainage holes in the frame ensures the modules to withstand various weather conditions.
- Minimal wiring effort required as the module has high reverse current resistance.

MECHANICAL DRAWINGS

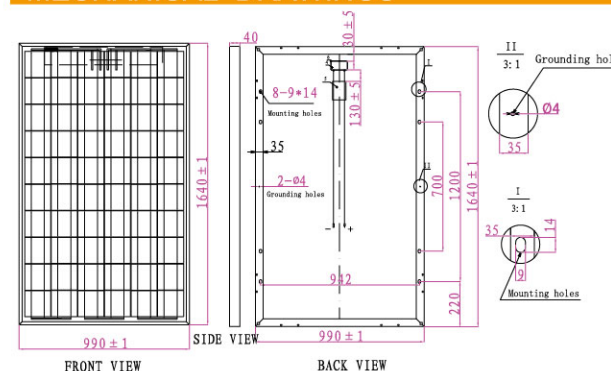

MECHANICAL SPECIFICATION

Cell Type	Poly Crystalline 156x156mm
Number of cells	60(6x10)
Dimensions (AXBXC)	1640x990x40mm
Weights	21kg
Front Glass	3.2mm tempered low iron glass
Frame	Anodized aluminum
Junction Box	IP 65, with bypass diodes
Connector	MC4 compatible
Output Cables	TUV, ± length 900mm, 4.0mm ²

ELECTRICAL CHARACTERISTICS

	220W	230W	235W	240W	245W	250W	255W	260W
Maximum Power at STC(Pmax)	220W	230W	235W	240W	245W	250W	255W	260W
Short Circuit Current(Isc)	8.32A	8.6A	8.43A	8.57A	8.63A	8.71A	8.80A	8.89A
Open Circuit Voltage(Voc)	36.2V	36.2V	35.6V	35.7V	36.1V	36.3V	36.4V	36.7V
Maximum Power Current(Imp)	7.56A	7.9A	7.88A	8.00A	8.05A	8.17A	8.30A	8.42A
Maximum Power Voltage(Vmpp)	29.1V	29.1V	29.8V	30.0V	30.4V	30.6V	30.7V	30.9V
Encapsulated Cell Efficiency	15.53%	16.24%	16.59%	16.94%	17.30%	17.65%	18.00%	18.36%
Module Efficiency	13.55%	14.17%	14.47%	14.78%	15.09%	15.40%	15.71%	16.01%
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%



STC: irradiance 1000W/m² Module temperature 25°C AM=1.5

TEMPERATURE CHARACTERISTICS

Norminal Operating Cell Temperature (NOCT)	45°C ±2°C
Temperature Coefficient of Pmax	-0.44% / °C
Temperature Coefficient of Voc	-0.34% / °C
Temperature Coefficient of Isc	0.06% / °C

PACKING CONFIGURATION


Container	20'GP	40'GP
Pieces per pallet	26	26
Pallets per container	14	28
Pieces per container	344	728

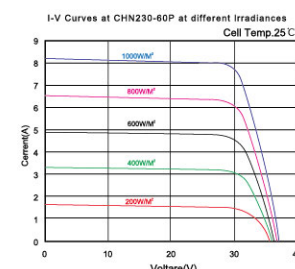

SYSTEM INTEGRATION PARAMETERS

Maximum system voltage	VDC 1000V
Maximum Series Fuse	15A
Increased snowload acc. to IEC 61215	5400Pa
Operating Temperature	-40to+85°C
Number of bypass diodes	3 or 6

INDUSTRY-LEADING WARRANTY BASED ON NOMINAL POWER

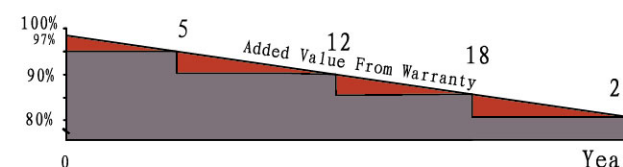

- Based on nominal power(pnom)
- 25-year transferrable power output warranty: 5 years/95%, 12 years/90%, 18 years/85%, 25 years/80%
- 10-year material and workmanship

QUALIFICATIONS AND CERTIFICATES

