
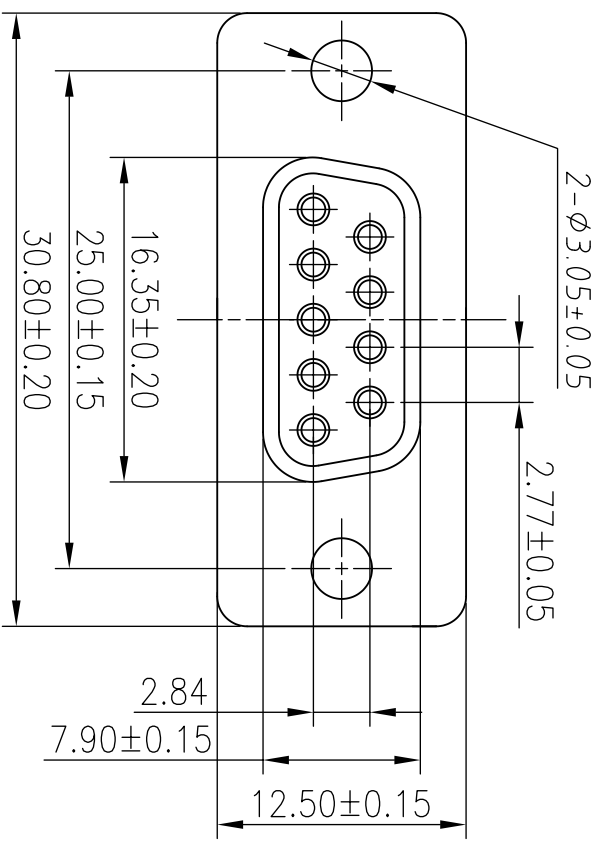


RoHS Compliant

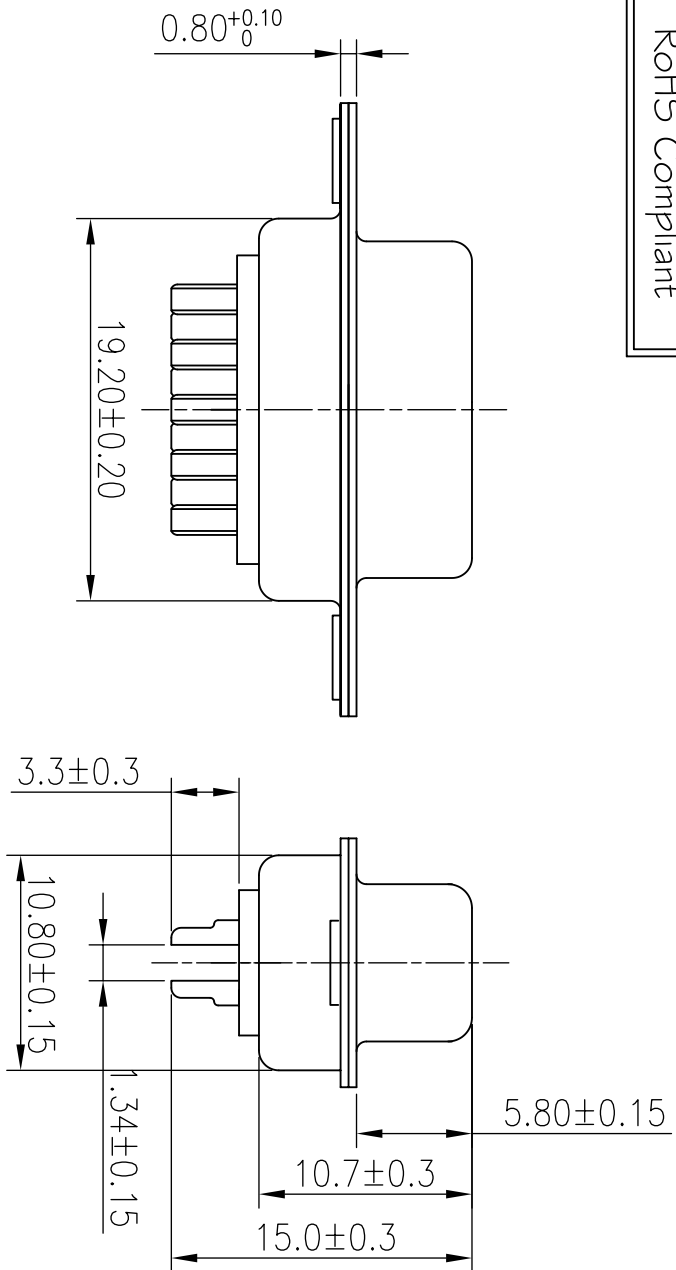

REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE

- 1. MATERIAL:**  
 INSULATOR: PBT 30% GLASS FIBER UL94V-0  
 Color:Black\White\Blue  
 TERMINAL: COPPER ALLOY  
 GOLD FLASH ON CONTACT AREA  
 TIN:100U" ON SOLDER TAIL  
 NICKEL:100U" ON THE BASE
- 2. ELECTRICAL:**  
 INSULATOR RESISTANCE: 5000MEGOHMS MIN. 500V DC.  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC R.M.S  
 VOLTAGE TATING: 40V AC (RMS) CONTINUOUS MAX.  
 CURRENT RATING: 2A MIN.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- 3. ENVIRONMENTAL**  
 TEMPERATURE RANGE: -25°C TO + 85°C.
- 4. MECHANICAL**  
 MATING FORCE: 5.1Kgf MAX.  
 UNMATING FORCE: 0.3~4.5 Kgf
- 5. ROHS COMPLIANT.**

图号 (DWG NO)	G-301-52-14	单位 (UNIT):	MM	深圳市优联康电子有限公司 ShenZhen Uling Electronic co., Ltd.	
版本号 (MODEL NO)		比例 (SCALE)	1:1	TEL:0755-82360164 FAX:0755-27536522	
版次 (REV): A/0	页次 (PAGE): 1/1	设计 (DESIGN)	Peng	品名 (ITEM NO)	DB-9Pin 母 焊线式
审核 (CHECKED)	Mac yang	公差 (TOLERANCE UNLESS NOTED)	XX ±0.30 XXX ±0.20 XX ±0.15 XX ±0.10 XX ±0.05 XX ±0.02 XX ±0.01	料号 (PART NO)	30109FK12AA2
核准 (APPROVED)		未注公差	XX ±0.30 XXX ±0.20 XX ±0.15 XX ±0.10 XX ±0.05 XX ±0.02 XX ±0.01		