






SEARCH





Main > Products > Etc Switches > Composite Control Switches > 1501

TACT SWITCHES

PUSH SWITCHES

SLIDE SWITCHES

HOOK SWITCHES

DETECTOR SWITCHES

ETC SWITCHES

NEW ITEM MICRO SWITCHES

LEVER SWITCH

▶ COMPOSITE CONTROL SWITCH

POWER SWITCHES

POWER SOCKETS


SHAKE SWITCHES

TOUCH SWITCHES CAR SWITCHES

THERMAL SWITCHES

IT PART

COMPOSITE CONTROL SWITCH I ETC SWITCHES

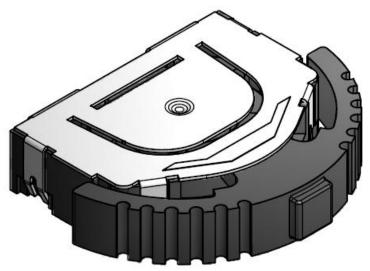

ABOUT DAEJIN

[1501]

Typical Specifications

1.Rating: DC5V 10mA

2.OutPut Voltage: 1V MIN AT 5V DC 1mA

3. Contact Resistance : $100m\Omega Max$.

4.Travel & Angle *Travel: 0.85±0.2mm *Level Angle : 25°MiN 5.Operating Force *Lever Portion : 70±30gf *Push Portion: 200±100gf 6.Operating Life: 100,000cycles

BACK

Features

The operation function of the control unit enables center push operation

Compound operation using a sing knob is

Compact size and low-profile forms are available for tape and reel packaging

Application


Communication equipment operation such as portable telephones.

Compact, portable unit such as VCR cameras, streo headphones, car radios, etc

OUTLINE DRAWING





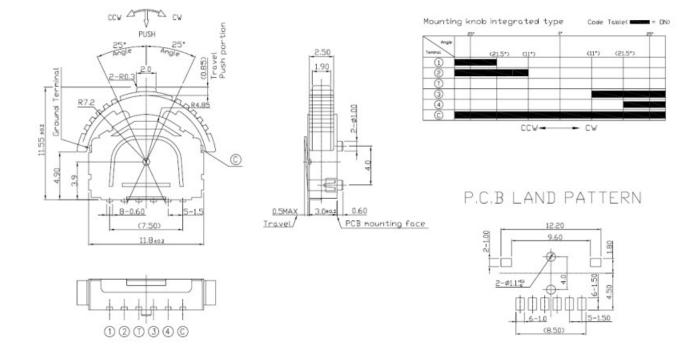

DAEJIN INDUSTRY CO., LTD.

164-2, Chunui-dong. Wonmi-gu, Buchon city, Kyunggi-do, Korea
T: 82-32-661-6101~4 / F: 82-32-661-6104~6 / Djswitch@djswitch.co.kr

DJ SWITCH (China factory)

Jin Nam Economic Developing Area, Jin Nam District, Tian Jin City, China T: 86-22-8851-2513 / F: 86-22-8851-2339 / Tianjin@djswitch.co.kr