



Terminal Block

EUROSTYLE P.C.B. TERMINAL BLOCK

TÜV R350002918
E133988(R)

ETB35 SERIES

CLAMPING TYPE, RIGHT ANGLE TYPE


PITCH=5.08/10.16mm

FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

SPECIFICATIONS


- Pitch 5.08mm, 10.16mm
- Wire range 24~14 AWG. (2.5mm²)
- No. of pole per block 2P or 3P
- Rated 10 Amp, 300 VAC
- Housing PA66
- Terminals Tin plated over Brass
- Screws M2.6x0.45P, Zinc plated over Steel
- Wire cage Nickel plated over Zinc Alloy
- Torque 0.25 N-m (2.18 lb-in)
- Operating temperature 110°C
- Stripping length 6mm
- UL Approval 300V, 10A, 24~14 AWG
- TUV Approval 250V, T80, 1.5mm²

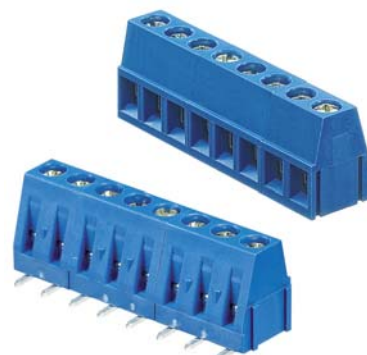

PART NUMBERING SYSTEM

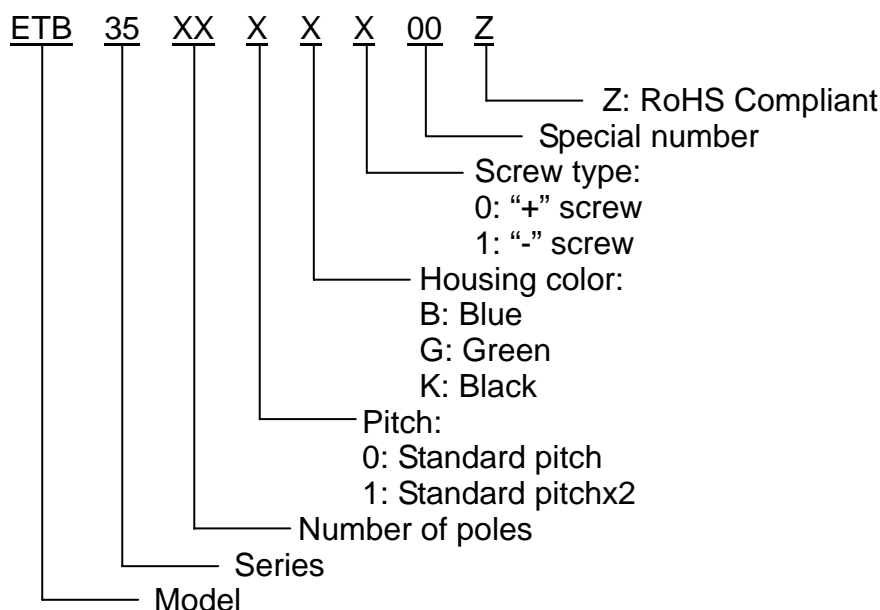

■ DRAWING

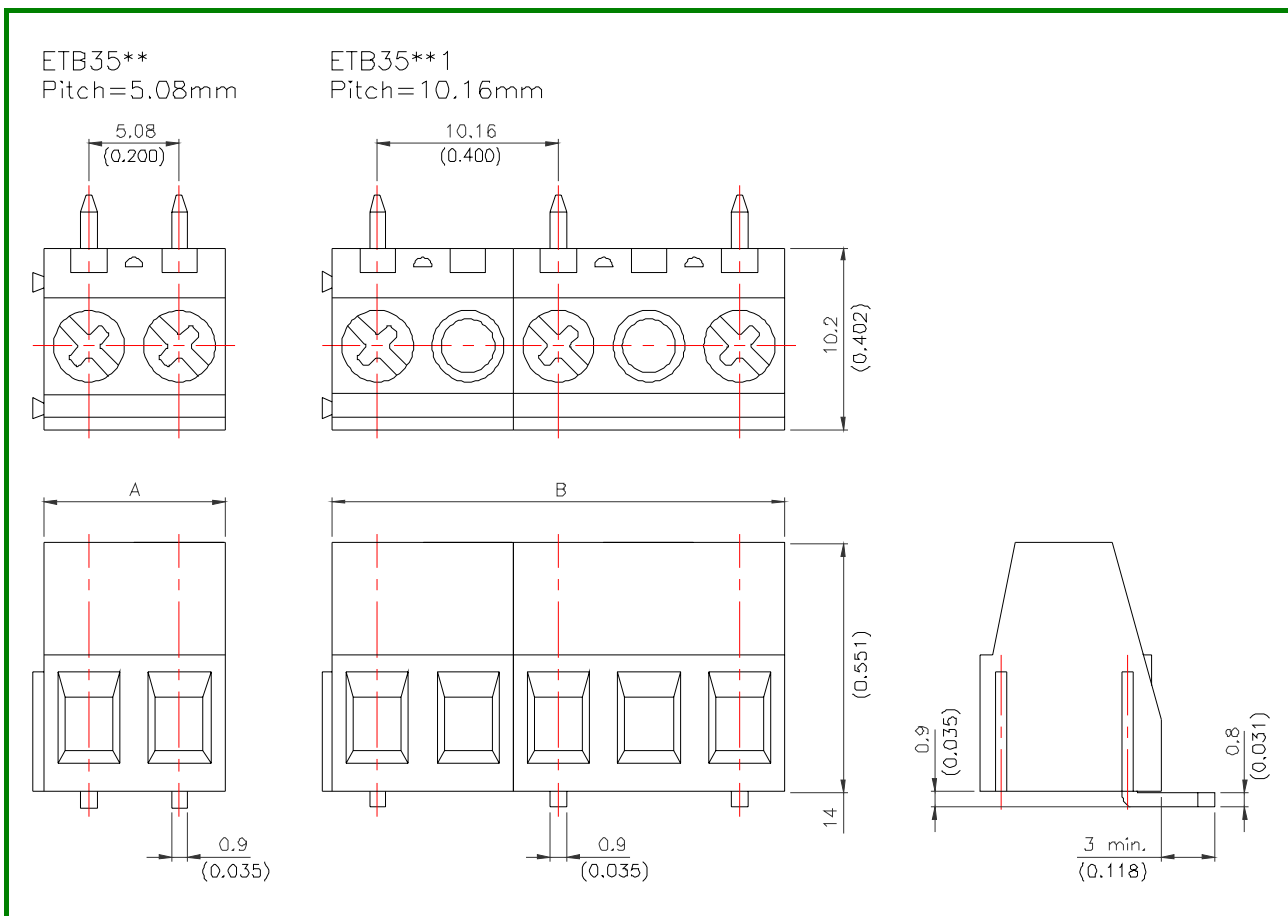

mm(inch)

| POLE | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
|------|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------|
| A | 10.16 (0.400) | 15.24 (0.600) | 20.32 (0.800) | 25.40 (1.000) | 30.48 (1.200) | 35.56 (1.400) | 40.64 (1.600) | 45.72 (1.800) | 50.80 (2.000) | 55.88 (2.200) | 60.96 (2.400) | 66.04 (2.600) |
| B | 15.24 (0.600) | 25.40 (1.000) | 35.56 (1.400) | 45.72 (1.800) | 55.88 (2.200) | 66.04 (2.600) | 76.20 (3.000) | 86.36 (3.400) | 96.52 (3.800) | 106.68 (4.200) | 116.84 (4.600) | |
| POLE | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | |
| A | 71.12 (2.800) | 76.20 (3.000) | 81.28 (3.200) | 86.36 (3.400) | 91.44 (3.600) | 96.52 (3.800) | 101.60 (4.000) | 106.68 (4.200) | 111.76 (4.400) | 116.84 (4.600) | 121.92 (4.800) | |