




MBR3035PT - MBR30150PT

30.0 AMPS. Schottky Barrier Rectifiers

TO-3P/TO-247AD

Features


- ✦ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✦ Metal silicon junction, majority carrier conduction
- ✦ Low power loss, high efficiency
- ✦ High current capability, low forward voltage drop
- ✦ High surge capability
- ✦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✦ Guardring for overvoltage protection
- ✦ High temperature soldering guaranteed: 260°C/10 seconds, 0.17"(4.3mm) from case
- ✦ Green compound with suffix "G" on packing code & prefix "G" on datecode.

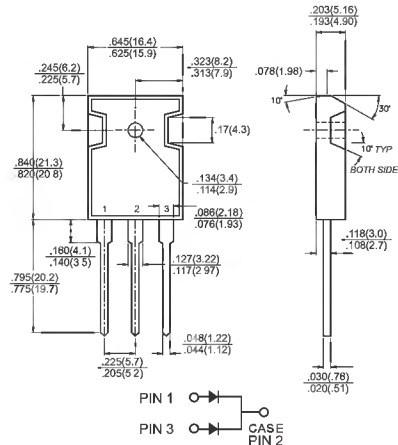

Mechanical Data

- ✦ Cases: JEDEC TO-3P/TO-247AD molded plastic body
- ✦ Terminals: Pure tin plated, lead free. solderable per MIL-STD-750, Method 2026
- ✦ Polarity: As marked
- ✦ Mounting position: Any
- ✦ Mounting torque: 10 in. - lbs. max
- ✦ Weight: 0.2 ounce, 5.6 grams

Dimensions in inches and (millimeters)



Marking Diagram

- MBR30XXPT = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

| Type Number | Symbol | MBR 3035 PT | MBR 3045 PT | MBR 3050 PT | MBR 3060 PT | MBR 3090 PT | MBR 30100 PT | MBR 30150 PT | Units | |
|---|-----------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|--------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 35 | 45 | 50 | 60 | 90 | 100 | 150 | V | |
| Maximum RMS Voltage | V_{RMS} | 24 | 31 | 35 | 42 | 63 | 70 | 105 | V | |
| Maximum DC Blocking Voltage | V_{DC} | 35 | 45 | 50 | 60 | 90 | 100 | 150 | V | |
| Maximum Average Forward Rectified Current (SEE FIG. 1) | $I_{(AV)}$ | | | | 30 | | | | A | |
| Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_c=105^\circ C$ | I_{FRM} | | | | 30 | | | | A | |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I_{FSM} | | | | 200 | | | | A | |
| Peak Repetitive Reverse Surge Current (Note 2) | I_{RRM} | 2.0 | | 1.0 | | | | | A | |
| Maximum Instantaneous Forward Voltage at (Note 1) $I_F=15A, T_c=25^\circ C$ $I_F=15A, T_c=125^\circ C$ $I_F=30A, T_c=25^\circ C$ $I_F=30A, T_c=125^\circ C$ | V_F | - | 0.60 | 0.65 | 0.75 | 0.85 | 0.95 | 0.92 | V | |
| Maximum Instantaneous Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage Per Leg (Note 2) @ $T_c=125^\circ C$ | I_R | 1.0 | | 0.5 | | | | | mA mA | |
| Voltage Rate of Change at (Rated V_R) | dV/dt | | | | 10,000 | | | | V/ μ S | |
| Typical Junction Capacitance @4V/1.0 MHz | C_j | 600 | | 460 | | 320 | | | pF | |
| Maximum Thermal Resistance Per Leg (Note 3) | $R_{\theta JC}$ | | | | 1.4 | | | | | $^\circ C/W$ |
| Operating Junction Temperature Range | T_J | | | | -65 to +150 | | | | | $^\circ C$ |
| Storage Temperature Range | T_{STG} | | | | -65 to +175 | | | | | $^\circ C$ |

- Notes:
1. 2.0us Pulse Width, f=1.0 KHz
 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle
 3. Thermal Resistance from Junction to case Per Leg

RATINGS AND CHARACTERISTIC CURVES (MBR3035PT THRU MBR30150PT)

FIG.1- FORWARD CURRENT DERATING CURVE

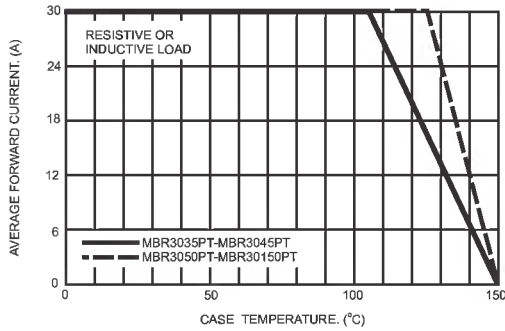


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

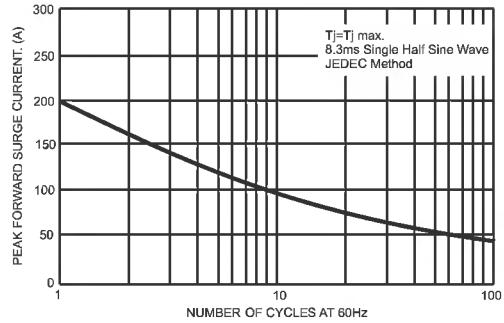


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

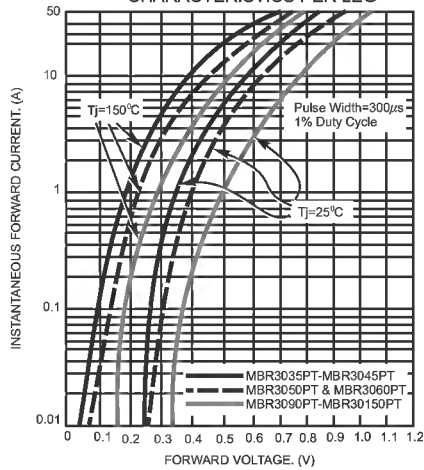


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

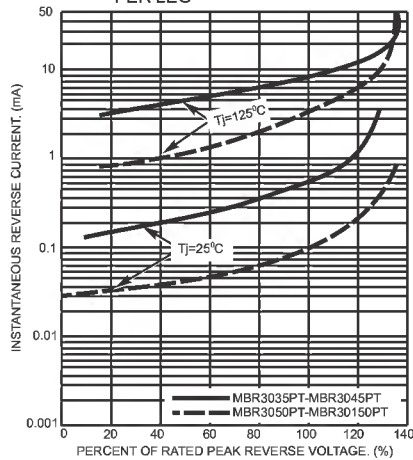


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

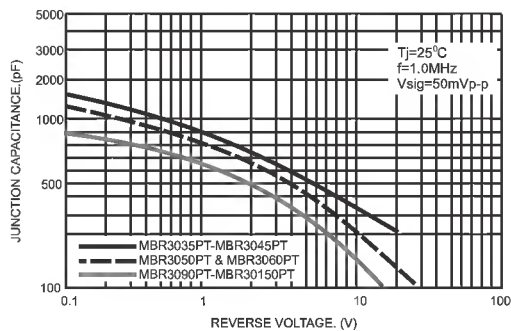


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

