

Specifications



Current Rating: 3A AC,DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Temperature Range: -40°C ~ +105°C

Material

Insulator: P.B.T, UL94V-0
 Contact: Copper Alloy

ORDER INFORMATION

M	L	25	85	X	1	-	1	XX
Straight Type		Height=8.5mm		RoHS + P.B.T		No. of Contacts Per Row (02~40)		
Pitch 2.54mm		G0:Gold Flash G1:Gold 3u" G2:Gold 5u" G3:Gold 10u" G4:Gold 15u" G5:Gold 30u"		S0:Selective Flash S1:Selective 3u" S2:Selective 5u" S3:Selective 10u" S4:Selective 15u" S5:Selective 30u"		Single Row		

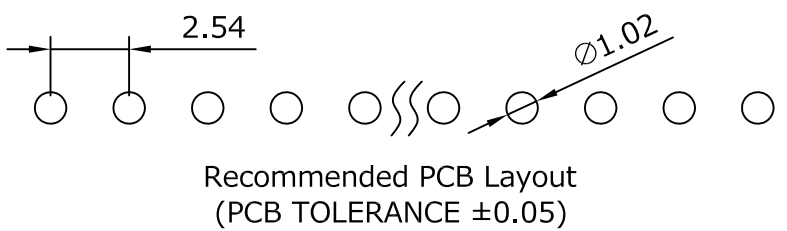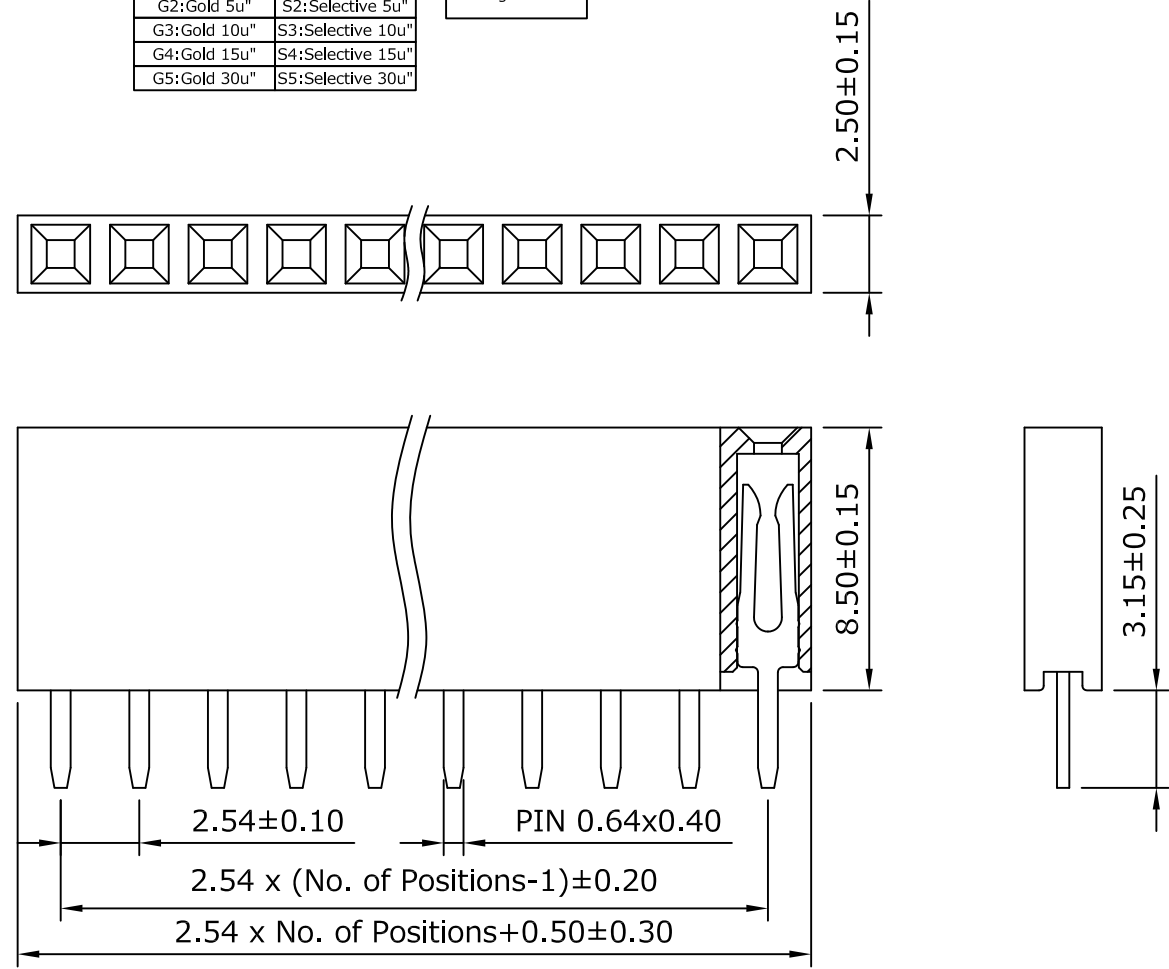

			<p>Morecrafts Tel: +886-2-2966-1326 Fax: +886-2-2966-1352</p>	品號	ML2585X1-1XX	日期	2005/08/20			
				圖號	ML2585X1-1XX	繪圖	Sayid			
				客戶品號		核對	Max			
REV.	DESCRIPTION	DATA	TITLE: Female Header 2.54mm Plastic Height 8.5mm	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm