
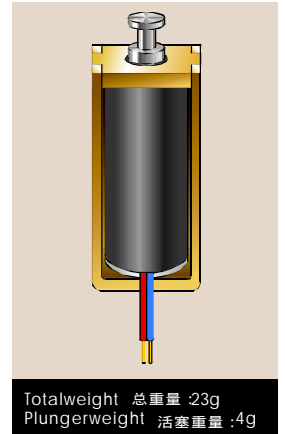


# OPEN FRAME SOLENOID SDO-0530L

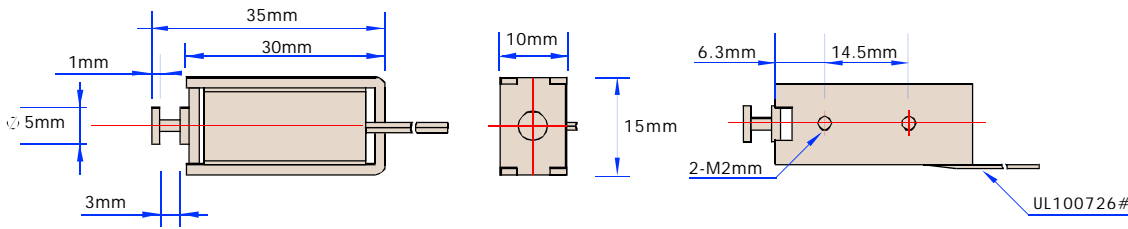


## ORDERING INFORMATION

代号编排

SD O-05 30 L- \* \* \*

ZANTY 宗泰  
 Open Frame Solenoid 开置式螺线管  
 Plunger dia(mm) 滑杆直径(mm)  
 Frame length(mm) 框架长度(mm)

Coil Resistance 线圈电阻: \* Ω  
 Serial number 序号  
 Voltage 电压: 06:DC6V 12:DC12V 24:DC24V 48:DC48V  
 L: Pull Type 吸入式 S: Push Type 推出式

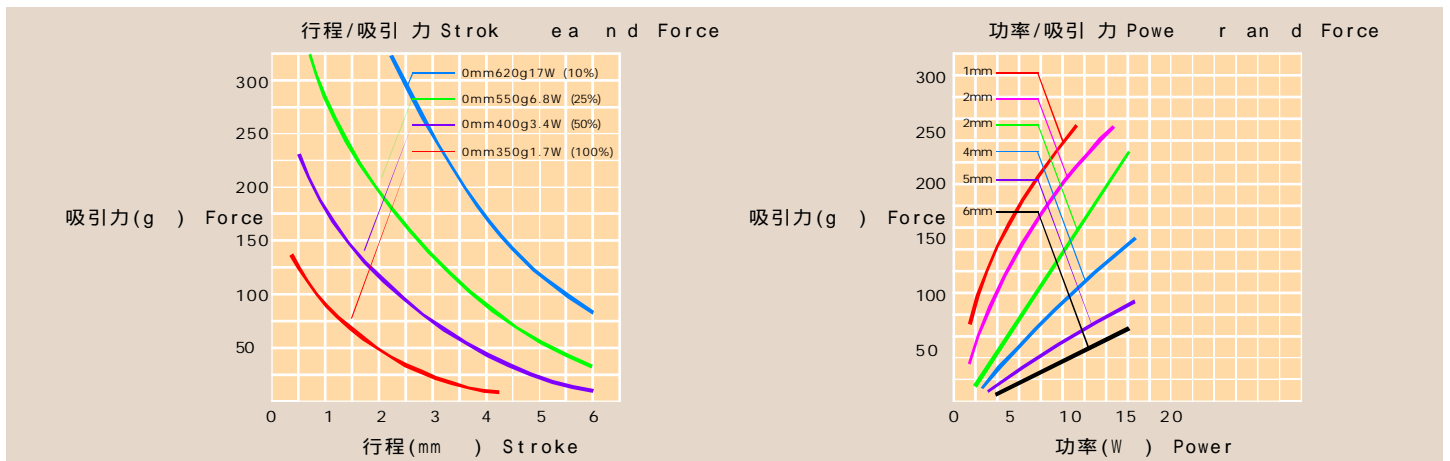

动作周期 (100%) ON时间/ON时间+OFF时间 Duty cycle (100%) "ON" time/"ON" time + "OFF" time		100%	50%	25%	10%
		连通 continuous	间断 intermittent		
最大ON时间 (秒) MAX "ON" Time in second		-	50	18	2
20°C 时的功率 watt at 20°C		1.7	3.4	6.8	17
型号 TYPE Number	电阻 resistance Ω	电压 volts DC			
SDO-0530L-06A	21	6	8.5	12	19
SDO-0530L-12A	85	12	17	24	38
SDO-0530L-24A	339	24	34	48	76
SDO-0530L-48A	960	48	68	96	152



Shenzhen Zanty Electronics Co., Ltd.

Add.: Building C1,C2,B2, Jihua Industry District, Shenzhen, China P.C.: 518112  
 Tel.: (+86 755) 2854 3752 Fax: (+86 755) 2854-3458  
 E-mail: Sales@Zanty.com Website: www.zanty.com