

1. PHYSICAL PROPERTIES


1.1 Picture



1.2 Dimension



1.3 Structure

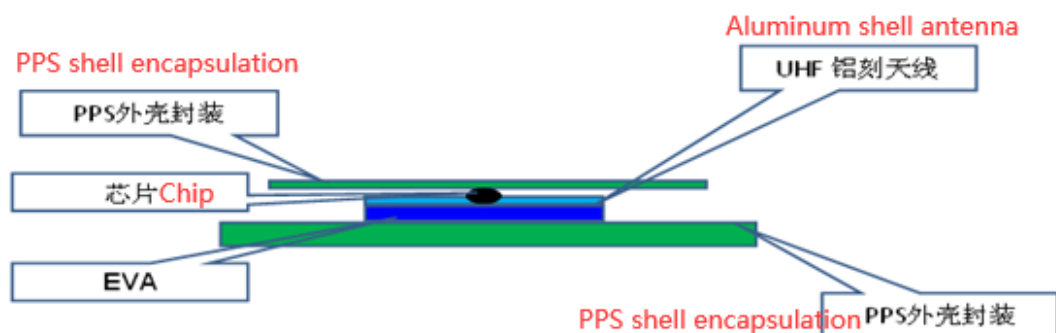

2 General Characteristics

Item	Description	Remark	
Material	PP Splastic-coated		
Manufacture	Aline/Higgs3/U8	Customer request	
Meeting Standards	ISO/IEC 18000-6C EPC Class1 Gen2		
EPC 区	96Bits	可读可写 Read & Write	
TID 区	64Bits	可读不可写 Read Only	
Password	32Bits 访问密码 32Bits Access 32Bits 毁灭密码 32Bits Kill	可读可写 Read & Write	
User area	512Bits	可读可写 Read & Write	
Standard operating frequency	860~960MHz		
Operating mode	无源 Passive		
Working process mode	Aluminum etching		
Reading Distance	Test record table, fixed machine		
	No.	Metallic-surface (15dB)	Metallic-surface(30dB)
	1	80cm	1.5m
	2	80cm	1.5m

3. Environmental test

Operating temperature/humidity: -20~50℃/20%~90%RH

Storage temperature/humidity: -40~104℃/20%~90%RH

Statement: THE above environmental requirements are based on our latest knowledge and experience. We reserve the right of final interpretation.

4. Packaging

Shipping method	Packed in boxes (1056pcs)
Shipping quantity	22Pcs/bag, 48bags/box
Modes of Packing	Waterproof, collision proof, dust proof
Remark	The packing quantity of finished products is for reference only, and the actual shipment shall prevail