



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

**1N5400  
THRU  
1N5408**

**TECHNICAL SPECIFICATIONS OF SILICON RECTIFIER**  
VOLTAGE RANGE - 50 to 1000 Volts CURRENT - 3.0 Amperes

**FEATURES**

- \* Low cost
- \* Low leakage
- \* Low forward voltage drop
- \* High current capability

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 1.18 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



DO-27

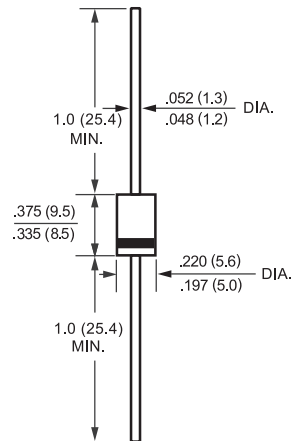

Dimensions in inches and (millimeters)

|  | SYMBOL                            | 1N5400                  | 1N5401 | 1N5402 | 1N5404 | 1N5406 | 1N5407 | 1N5408 | UNITS |
|--|-----------------------------------|-------------------------|--------|--------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage   | V <sub>RRM</sub>                  | 50                      | 100    | 200    | 400    | 600    | 800    | 1000   | Volts |
| Maximum RMS Voltage  | V <sub>RMS</sub>                  | 35                      | 70     | 140    | 280    | 420    | 560    | 700    | Volts |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>                   | 50                      | 100    | 200    | 400    | 600    | 800    | 1000   | Volts |
| Maximum Average Forward Rectified Current<br>.375*(9.5mm) lead length at T <sub>L</sub> = 105°C            | I <sub>o</sub>                    | 3.0                     |        |        |        |        |        |        | Amps  |
| Peak Forward Surge Current 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC Method)       | I <sub>FSM</sub>                  | 200                     |        |        |        |        |        |        | Amps  |
| Maximum Instantaneous Forward Voltage at 3.0A DC   | V <sub>F</sub>                    | 1.1                     |        |        |        |        |        |        | Volts |
| Maximum DC Reverse Current<br>at Rated DC Blocking Voltage   | I <sub>R</sub>                    | @T <sub>A</sub> = 25°C  |        |        |        |        |        | 5.0    | uAmps |
|  |                                   | @T <sub>A</sub> = 100°C |        |        |        |        |        | 500    |       |
| Maximum Full Load Reverse Current Average, Full Cycle<br>.375*(9.5mm) lead length at T <sub>L</sub> = 75°C |                                   | 30                      |        |        |        |        |        |        | uAmps |
| Typical Junction Capacitance (Note)  | C <sub>J</sub>                    | 40                      |        |        |        |        |        |        | pF    |
| Typical Thermal Resistance   | R <sub>θJA</sub>                  | 30                      |        |        |        |        |        |        | °C/W  |
| Operating and Storage Temperature Range  | T <sub>J</sub> , T <sub>STG</sub> | -65 to + 175            |        |        |        |        |        |        | °C    |

NOTES : Measured at 1 MHz and applied reverse voltage of 4.0 volts

# RATING AND CHARACTERISTIC CURVES (1N5400 THRU 1N5408)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

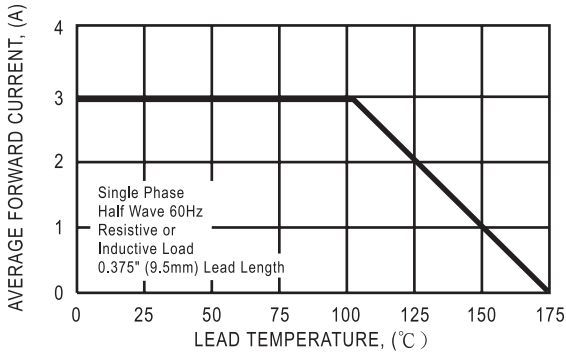


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

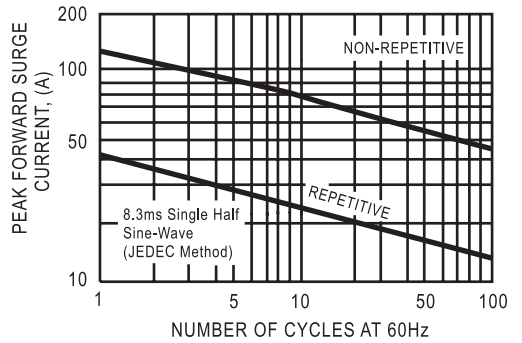


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD VOLTAGE, (V)

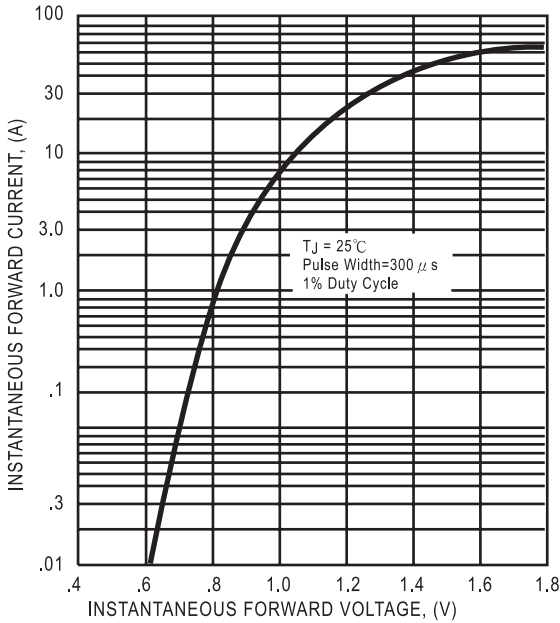


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

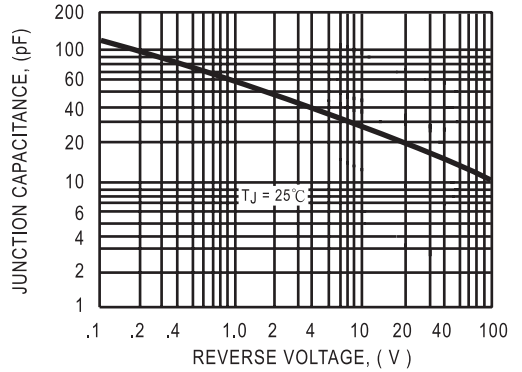


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS

