

Datasheet

Art.No. 25.352.4253.0

PCB pin header 8213 S / 12 W OB

PCB pin header with angled pin, 12-pole, without marking, pitch: 5,08 mm,
closed series: 8213 S/12 W OB



Art.No.	25.352.4253.0
EAN	4015573194137
Order unit	50 pieces

Approvals



Technical data

General

Modular spacing	5.08 mm
Soldering process	Wave soldering
Number of poles	12
Number of levels	1
Fastening	None
Mating direction towards (circuit) board	180°

Technical data

Rated current	12 A
Overvoltage Category I	1000 V
Overvoltage Category II	400 V
Overvoltage Category III	250 V
Rated impulse voltage	4 kV

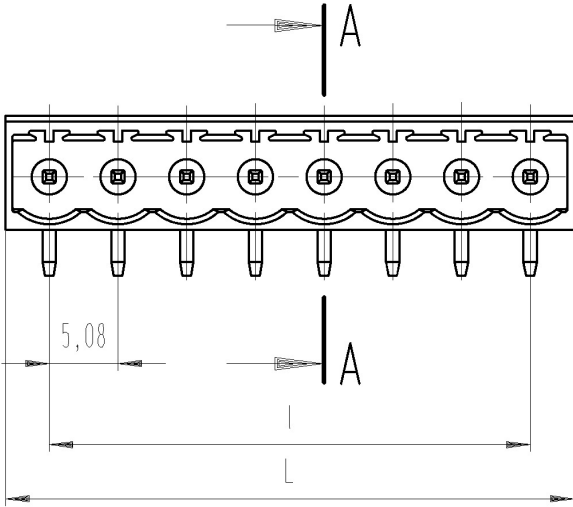
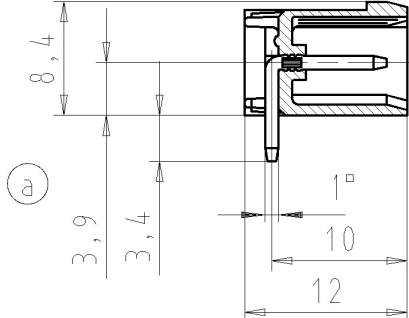
Technical Data UL/CSA

Voltage UL	300 V
Current field wiring	15 A
Current factory wiring	15 A
Voltage CSA	300 V
Current CSA	15 A

Other

Type of insulation material	Thermoplastic
Colour	Grey
Height	8.4 mm
Length	62.36 mm
Depth	12 mm
Material contact base	CuZn
Material contact surface	Sn

Drawings

1	2	3	A																																																																																																																																		
																																																																																																																																					
Schnitt A-A section A-A			gezeichnete Ausführung 8-polig drawn version 8 poles																																																																																																																																		
			Weitere Daten siehe Katalog further data see catalog																																																																																																																																		
			<table border="1" style="margin: auto;"> <tr> <th>Farbe / colour</th> <th>.F</th> </tr> <tr> <td>grau / grey</td> <td>.0</td> </tr> <tr> <td>schwarz / black</td> <td>.1</td> </tr> <tr> <td>grün / green</td> <td>.7</td> </tr> <tr> <td>orange</td> <td>.9</td> </tr> </table>	Farbe / colour	.F	grau / grey	.0	schwarz / black	.1	grün / green	.7	orange	.9																																																																																																																								
Farbe / colour	.F																																																																																																																																				
grau / grey	.0																																																																																																																																				
schwarz / black	.1																																																																																																																																				
grün / green	.7																																																																																																																																				
orange	.9																																																																																																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Teile-Nr. part no.</th> <th>Pol- zahl pole</th> <th>L</th> <th>l</th> <th>Typ type</th> <th>Teile-Nr. part no.</th> <th>Pol- zahl</th> <th>L</th> <th>l</th> <th>Typ type</th> </tr> </thead> <tbody> <tr><td>25.352.3253.F</td><td>2</td><td>11,56</td><td>5,08</td><td>8213S / 2W OB</td><td>25.352.4353.F</td><td>13</td><td>67,44</td><td>60,96</td><td>8213S /13W OB</td></tr> <tr><td>25.352.3353.F</td><td>3</td><td>16,64</td><td>10,16</td><td>8213S / 3W OB</td><td>25.352.4453.F</td><td>14</td><td>72,52</td><td>66,04</td><td>8213S /14W OB</td></tr> <tr><td>25.352.3453.F</td><td>4</td><td>21,72</td><td>15,24</td><td>8213S / 4W OB</td><td>25.352.4553.F</td><td>15</td><td>77,60</td><td>71,12</td><td>8213S /15W OB</td></tr> <tr><td>25.352.3553.F</td><td>5</td><td>26,80</td><td>20,32</td><td>8213S / 5W OB</td><td>25.352.4653.F</td><td>16</td><td>82,68</td><td>76,20</td><td>8213S /16W OB</td></tr> <tr><td>25.352.3653.F</td><td>6</td><td>31,88</td><td>25,40</td><td>8213S / 6W OB</td><td>25.352.4753.F</td><td>17</td><td>87,76</td><td>81,28</td><td>8213S /17W OB</td></tr> <tr><td>25.352.3753.F</td><td>7</td><td>36,96</td><td>30,48</td><td>8213S / 7W OB</td><td>25.352.4853.F</td><td>18</td><td>92,84</td><td>86,36</td><td>8213S /18W OB</td></tr> <tr><td>25.352.3853.F</td><td>8</td><td>42,04</td><td>35,56</td><td>8213S / 8W OB</td><td>25.352.4953.F</td><td>19</td><td>97,92</td><td>91,44</td><td>8213S /19W OB</td></tr> <tr><td>25.352.3953.F</td><td>9</td><td>47,12</td><td>40,64</td><td>8213S / 9W OB</td><td>25.352.5053.F</td><td>20</td><td>103,00</td><td>96,52</td><td>8213S /20W OB</td></tr> <tr><td>25.352.4053.F</td><td>10</td><td>52,20</td><td>45,72</td><td>8213S /10W OB</td><td>25.352.5153.F</td><td>21</td><td>108,08</td><td>101,60</td><td>8213S /21W OB</td></tr> <tr><td>25.352.4153.F</td><td>11</td><td>57,28</td><td>50,80</td><td>8213S /11W OB</td><td>25.352.5253.F</td><td>22</td><td>113,16</td><td>106,68</td><td>8213S /22W OB</td></tr> <tr><td>25.352.4253.F</td><td>12</td><td>62,36</td><td>55,88</td><td>8213S /12W OB</td><td>25.352.5353.F</td><td>23</td><td>118,24</td><td>111,76</td><td>8213S /23W OB</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td>25.352.5453.F</td><td>24</td><td>123,32</td><td>116,84</td><td>8213S /24W OB</td></tr> </tbody> </table>				Teile-Nr. part no.	Pol- zahl pole	L	l	Typ type	Teile-Nr. part no.	Pol- zahl	L	l	Typ type	25.352.3253.F	2	11,56	5,08	8213S / 2W OB	25.352.4353.F	13	67,44	60,96	8213S /13W OB	25.352.3353.F	3	16,64	10,16	8213S / 3W OB	25.352.4453.F	14	72,52	66,04	8213S /14W OB	25.352.3453.F	4	21,72	15,24	8213S / 4W OB	25.352.4553.F	15	77,60	71,12	8213S /15W OB	25.352.3553.F	5	26,80	20,32	8213S / 5W OB	25.352.4653.F	16	82,68	76,20	8213S /16W OB	25.352.3653.F	6	31,88	25,40	8213S / 6W OB	25.352.4753.F	17	87,76	81,28	8213S /17W OB	25.352.3753.F	7	36,96	30,48	8213S / 7W OB	25.352.4853.F	18	92,84	86,36	8213S /18W OB	25.352.3853.F	8	42,04	35,56	8213S / 8W OB	25.352.4953.F	19	97,92	91,44	8213S /19W OB	25.352.3953.F	9	47,12	40,64	8213S / 9W OB	25.352.5053.F	20	103,00	96,52	8213S /20W OB	25.352.4053.F	10	52,20	45,72	8213S /10W OB	25.352.5153.F	21	108,08	101,60	8213S /21W OB	25.352.4153.F	11	57,28	50,80	8213S /11W OB	25.352.5253.F	22	113,16	106,68	8213S /22W OB	25.352.4253.F	12	62,36	55,88	8213S /12W OB	25.352.5353.F	23	118,24	111,76	8213S /23W OB						25.352.5453.F	24	123,32	116,84	8213S /24W OB
Teile-Nr. part no.	Pol- zahl pole	L	l	Typ type	Teile-Nr. part no.	Pol- zahl	L	l	Typ type																																																																																																																												
25.352.3253.F	2	11,56	5,08	8213S / 2W OB	25.352.4353.F	13	67,44	60,96	8213S /13W OB																																																																																																																												
25.352.3353.F	3	16,64	10,16	8213S / 3W OB	25.352.4453.F	14	72,52	66,04	8213S /14W OB																																																																																																																												
25.352.3453.F	4	21,72	15,24	8213S / 4W OB	25.352.4553.F	15	77,60	71,12	8213S /15W OB																																																																																																																												
25.352.3553.F	5	26,80	20,32	8213S / 5W OB	25.352.4653.F	16	82,68	76,20	8213S /16W OB																																																																																																																												
25.352.3653.F	6	31,88	25,40	8213S / 6W OB	25.352.4753.F	17	87,76	81,28	8213S /17W OB																																																																																																																												
25.352.3753.F	7	36,96	30,48	8213S / 7W OB	25.352.4853.F	18	92,84	86,36	8213S /18W OB																																																																																																																												
25.352.3853.F	8	42,04	35,56	8213S / 8W OB	25.352.4953.F	19	97,92	91,44	8213S /19W OB																																																																																																																												
25.352.3953.F	9	47,12	40,64	8213S / 9W OB	25.352.5053.F	20	103,00	96,52	8213S /20W OB																																																																																																																												
25.352.4053.F	10	52,20	45,72	8213S /10W OB	25.352.5153.F	21	108,08	101,60	8213S /21W OB																																																																																																																												
25.352.4153.F	11	57,28	50,80	8213S /11W OB	25.352.5253.F	22	113,16	106,68	8213S /22W OB																																																																																																																												
25.352.4253.F	12	62,36	55,88	8213S /12W OB	25.352.5353.F	23	118,24	111,76	8213S /23W OB																																																																																																																												
					25.352.5453.F	24	123,32	116,84	8213S /24W OB																																																																																																																												
Zulässige Abweichungen nach DIN 7167/Permissible deviations acc. to DIN 7167. (This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).																																																																																																																																					
Freitoleranz nach General tolerance																																																																																																																																					
CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed																																																																																																																																					
1.Verwendung: - First Use:																																																																																																																																					
Blatt: 1 von 1 Sheet: 1 of 1																																																																																																																																					
Werkstoff/Material		2005 Tag/Date Name																																																																																																																																			
gezeichnet drawn		28.07. Schmitt J.																																																																																																																																			
geprüft checked		- -																																																																																																																																			
Normgepr. Stand. check		- -																																																																																																																																			
Maßstab/Scale		Zeichnung Nr./Drawing No.																																																																																																																																			
2:1		T 25.352.3253.0 01K																																																																																																																																			
Maße in mm/Dimensions are in mm																																																																																																																																					