

# Specification Guide Codes:

**A= Item Number**

**B= Insertion & Extraction Force**

**C= Dielectric Strength For 60 Sec**

• Special Design Also Available. For Details Please Contact Factory.

• Use UL Approved Materials • Low Cost • Low Contact Resistance • Flame Retardant.

**D= Suitable Rated Current**

**E= Insulation Resistance At500VDC**

**F= Temperature Rise**


**G= Voltage Drop**

## FUSE BLOCKS FOR 5x20mm FUSES




### CQ-200P

**B:** 1Kg.Min.  
**C:** AC2000V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 60°C Max.  
**G:** 15mV Max.

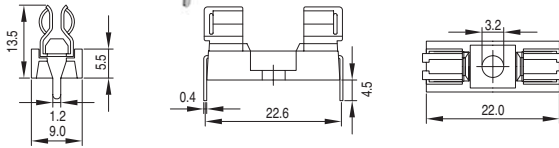


### CQ-200PT

**B:** 1Kg.Min.  
**C:** AC2000V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 60°C Max.  
**G:** 15mV Max.

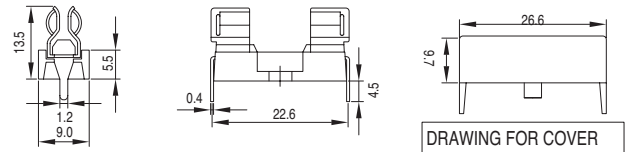


### CQ-200S

**B:** 1Kg.Min.  
**C:** AC500V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 55°C Max.  
**G:** 20mV Max.

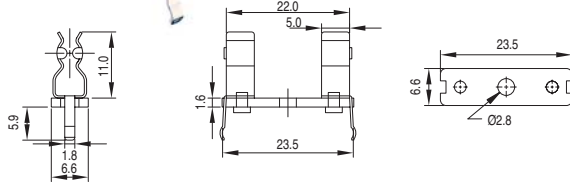


### CQ-200H

**B:** 1Kg.Min.  
**C:** AC500V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

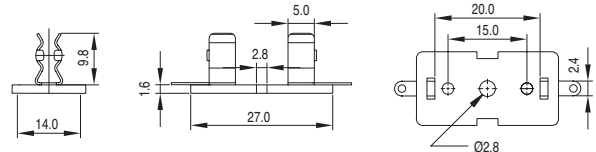


### CQ-200V

**B:** 1Kg.Min.  
**C:** AC500V Min.  
**D:** 6.3A250V  
**E:** 100MΩ Min  
**F:** 50°C Max.  
**G:** 20mV Max.

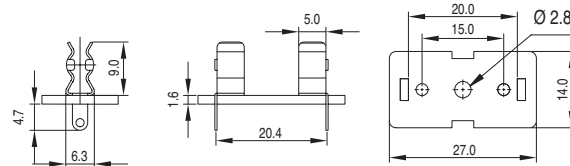

### CQ-200N

**B:** 1.5Kg.Min.  
**C:** AC2000V Min.  
**D:** 15A250V  
**E:** 500MΩ Min  
**F:** 60°C Max.  
**G:** 15mV Max.

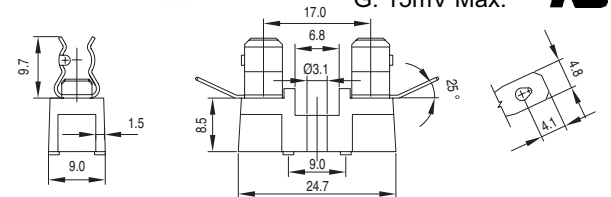

### CQ-FH187

**B:** 1.5Kg.Min.  
**C:** AC2000V Min.  
**D:** 15A250V  
**E:** 500MΩ Min  
**F:** 60°C Max.  
**G:** 15mV Max.

