
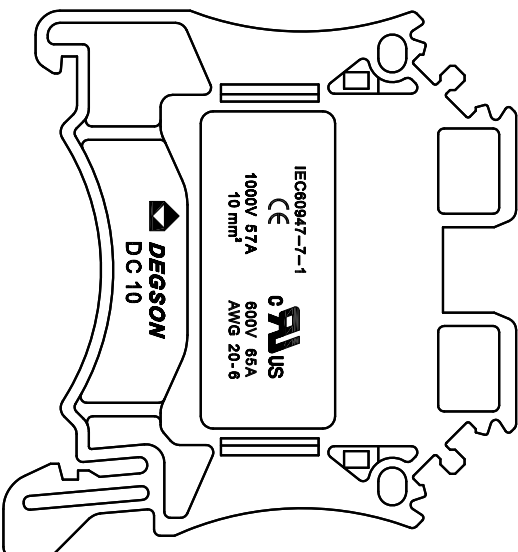
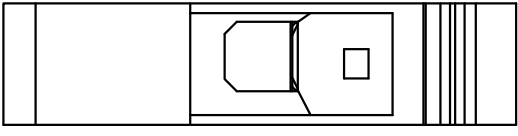
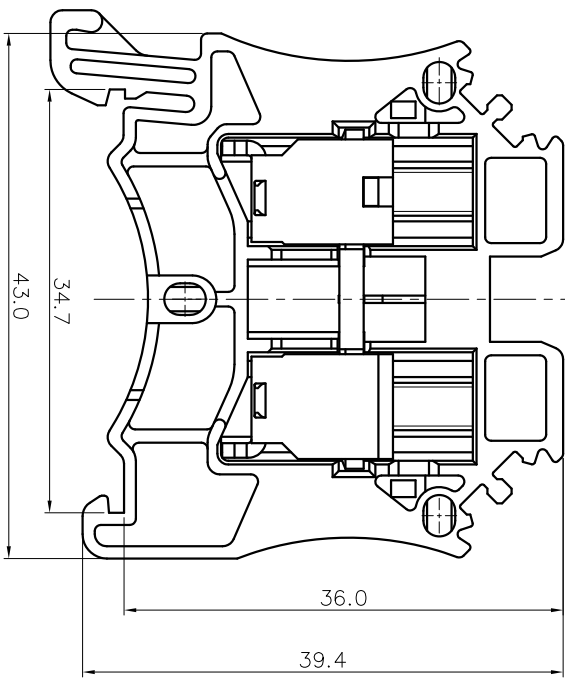


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

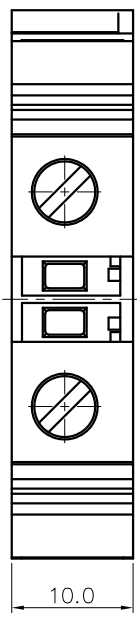

IEC Standard		
1. Pollution degree		3
Overvoltage category		III
Rate impulse voltage(kV)		8kV
Rate voltage(V)		1000V
Rate current(A)		57A

1. Rated voltage/current : 600V / 65A
2. Withstanding voltage : AC2200V/1Min.
3. Torque value : M4 , 10.53lb.in
4. Wire range : 20~6AWG

NOTES1:

1. UL Standard
2. Torque value : M4 , 1.2N·m
3. Wire range : 0.5~10mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.0mm, Poles : N=01P
3. Stripping length : 11~12mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range		In mm		Nominal Dimension Range		
mm	mm	mm	mm	mm	mm	
Over	Over	Over	Over	Over	Over	
6	10	30	60	100	150	0.1/10
TO	TO	TO	TO	TO	TO	
10	24	30	60	100	150	<
6	10	30	60	100	150	±2°
±0.15		±0.20		±0.30		±1.30

6. RoHS Compliance

DC10 - 01P - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	TITLE:	CUSTOMER DRAWING
CHKD.:	/	DRAWING NO.:	/
DRFT.:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1