


Distance sleeves and spacers


Spacers

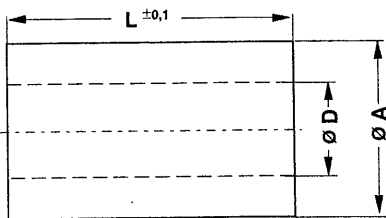

art. no.	dim. [mm]		
	A	D	L
AHM 3260...	6	3.2	1/ 2/ 3/ 4/ 5/ 6/ 7/ 8/ 9/ 10/ 12/ 15/ 18/ 25/ 30
AHM 4380...	8	4.3	1/ 2/ 3/ 4/ 5/ 6/ 7/ 8/ 9/ 10/ 12/ 15/ 18/ 25

... Please indicate length "L"

material	brass
surface treatment	8 µm nickel-plated, solderable

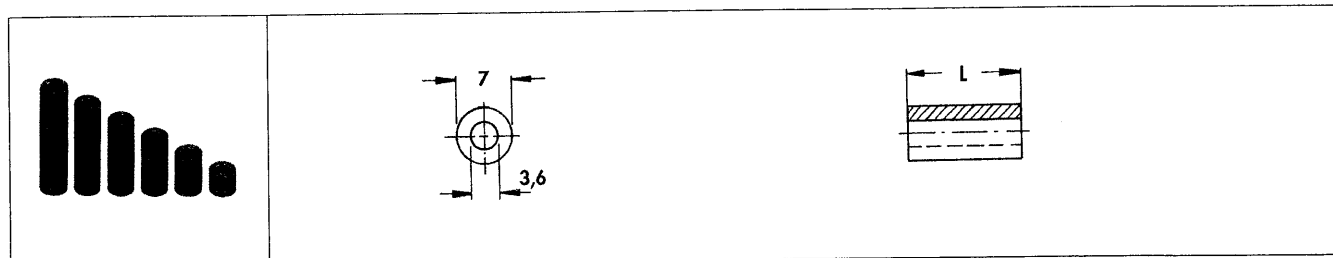

art. no.	length [mm]	art. no.	length [mm]
DR 071 V0	1	DR 713 V0	13
DR 072 V0	2	DR 714 V0	14
DR 073 V0	3	DR 715 V0	15
DR 074 V0	4	DR 720 V0	20
DR 075 V0	5	DR 725 V0	25
DR 076 V0	6	DR 730 V0	30
DR 077 V0	7	DR 735 V0	35
DR 078 V0	8	DR 740 V0	40
DR 079 V0	9	DR 745 V0	45
DR 710 V0	10	DR 750 V0	50
DR 711 V0	11	DR 760 V0	60
DR 712 V0	12		

special lengths on request

material	polyamide
heat distortion	180 °C
temperature range	+180 °C
colour	black
flammability	UL 94 V-0

Solder pins
Plugs
Miniature distance sleeves
Mounting parts for heatsinks

→ E 36
→ E 36
→ E 26
→ E 42 - 43

Heatsink profile-overview
Heatsinks for PCB
Special profiles
Clamp fixing for DIN-rail

→ A 13 - 16
→ A 89
→ A 136
→ E 16

E 32

A
B
C
D
E
F
G
H
I
J
K
L
M
N