

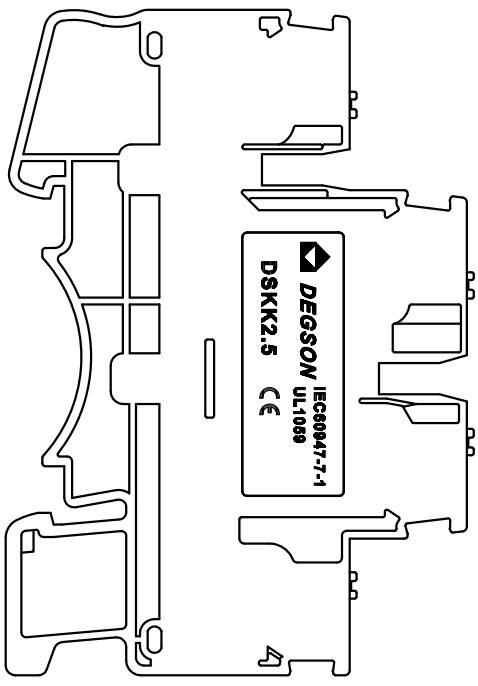


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE



5.15

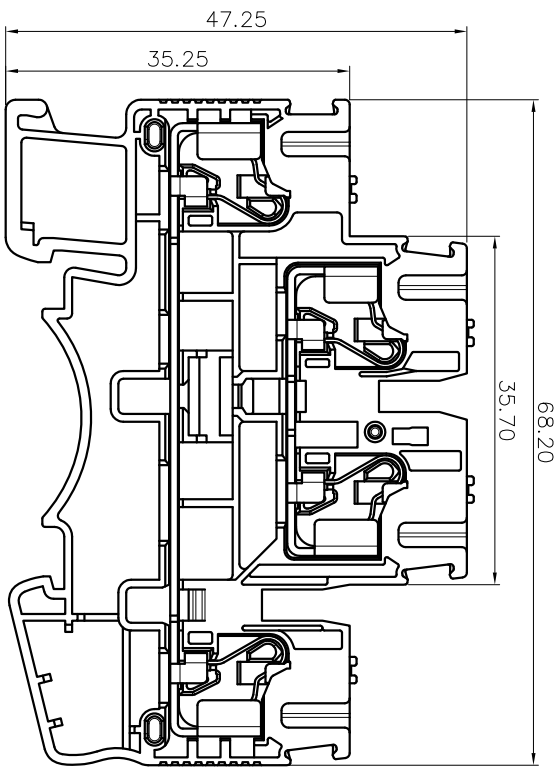

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 26~12AWG

IEC Standard	
1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	500V
Rate current(A)	22A


2. Wire range : 0.2~2.5mm²&4mm²(sq)

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.15mm,
- 3. Stripping length : 11~12mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:


Pitch range in mm	Nominal dimension in mm	Over mm	Over in mm	Over mm	Over in mm
6	10	TO	30	60	100
10	24	TO	60	100	150
15	30	±0.30	±0.50	±1.00	±1.30

6. RoHS Compliance

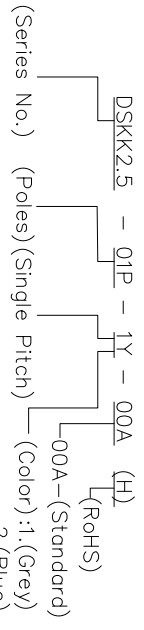

- 00A-(Standard)
- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD
APPD:		APPD:	
CHKD:		CHKD:	
DFT:		TITLE:	CUSTOMER DRAWING
		DRAWING NO.:	/
		REV	DO
		SHEET	1/1
		SCALE	1:1



A 8 7 6 5 4 3 2 1