



NH2 Switch Disconnect

1. General

- 1.1 In the open position, It complies with the requirements of the isolating function.
- 1.2 It is designed match DZ series MCBs/RCBOs.
- 1.3 Approvals and certificates
Detailed information, please refer to Certificates Table on the last page.





2. Technical data

	Standard		IEC/EN 60947-3
Electrical features	Rated voltage Ue	V	230/400
	Rated current Ie	A	32, 63, 100,125
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage (1.2/50)Uimp	V	4,000
	Rated short-time withstand current Icw		12Ie, 1s
	Rated making and breaking capacity		3Ie, 1.05Ue, cosΦ=0.65
	Rated short circuit making capacity		20Ie, t=0.1s
	Dielectric test voltage at ind. Freq. for 5s	kV	1.89
	Insulation voltage Ui	V	500
	Pollution degree		2
Utilization category		AC-22A	
Mechanical features	Electrical life		1,500
	Mechanical life		8,500
	Protection degree		IP20
	Ambient temperature (with daily average≤35°C)	°C	-5...+40
	Storage temperature	°C	-25...+70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm ²	50
		AWG	18-2
	Terminal size top/bottom for busbar	mm ²	25
		AWG	18-3
	Tightening torque	N·m	2.5
In·lbs.		22	
Connection		From top and bottom	

Rated current	Screw size	Tightening torque	Copper cross-sectional area
32A, 63A	M5	2.0 N.m	32A: 6mm ² ; 63A: 16 mm ²
100A, 125A	M7	3.5N.m	100A: 35mm ² ; 125A: 50 mm ²

3. Overall and mounting dimensions (mm)

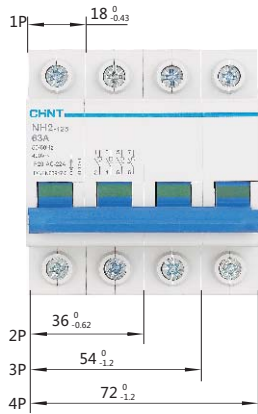

Poles	1P	2P~4P
H (mm)	$74^{0}_{-1.2}$	$77^{0}_{-1.2}$