



Zebra type

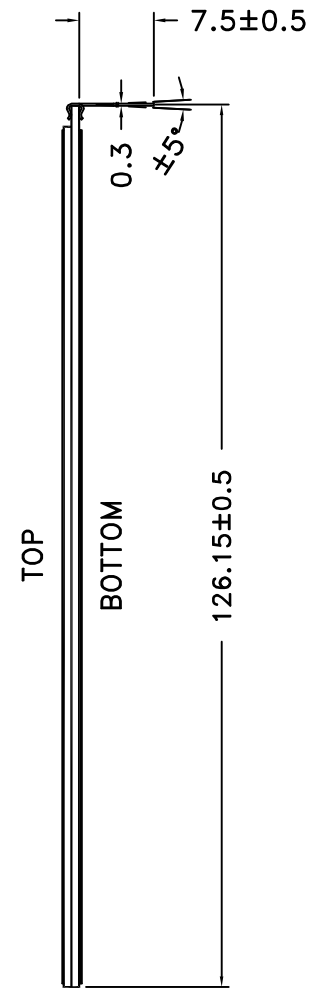

Pin type

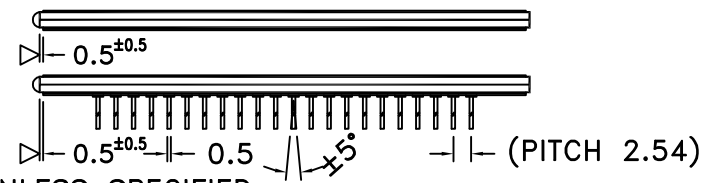


MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	24-NOV-08
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 1 : 1		


PROJECTION

S5975

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY	Y.WEN		
DATE	24Nov,08		
DRAWN BY : ZH.Q.LI	UNIT IN mm	OUR REF. 00	
✠ CLOVER DISPLAY LIMITED			

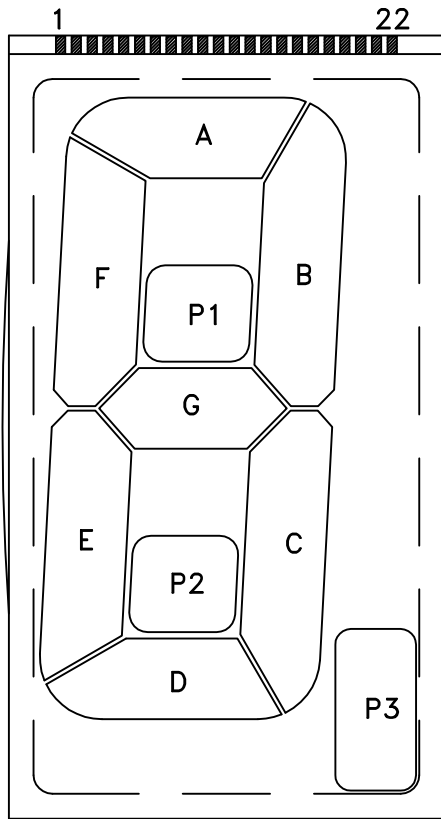

PIN	COM
1~2	D
3~4	P2
5~6	E
7~8	G
9~10	F
11~12	COM
13~14	A
15~16	B
17~18	P1
19~20	C
21~22	P3

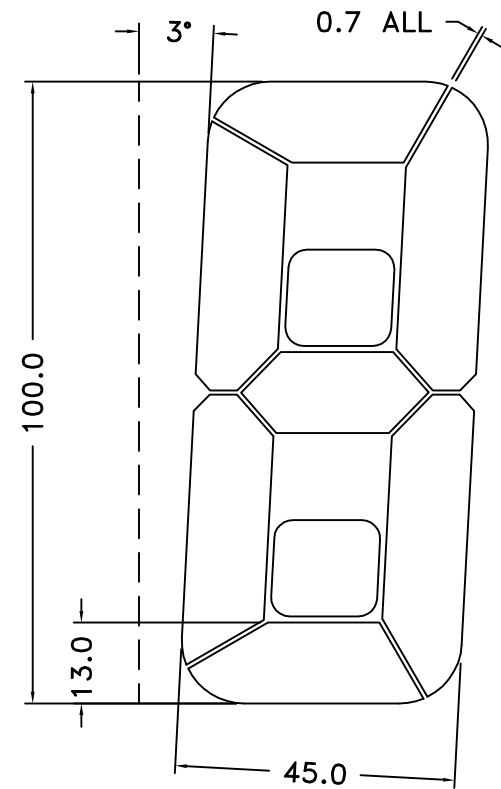

SCALE 4 : 5

TN TYPE

MODEL NO.	S5975A	S5975B	S5975C	S5975D	S5975E	S5975F	S5975G	S5975H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE
	REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE
OPERATION VOLTAGE	5.0 V
DRIVING METHOD	STATIC

REV.	REVISION RECORD	DATE	STANDARD	 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	24-NOV-08	CUSTOMER REF.		APPROVED BY	Y.WEN		
				DATE	24Nov,08			
			SHEET 2 OF 2	DRAWN BY :	ZH.Q.LI	UNIT IN mm	OUR REF. 00	
			SCALE N.T.S	S5975	CLOVER DISPLAY LIMITED			