


C1230020122

(TC-6WF)

Flat Telephone Cable

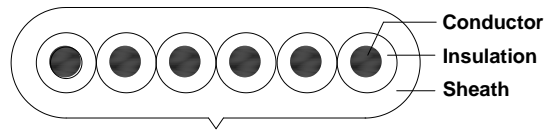

DESCRIPTION

28AWG Stranded PACW, 6 Cores, PP Insulation, PVC Sheath.

APPLICATION

For telecommunications system.

APPLICABLE STANDARD

- EU RoHS Complies 2011/65/EU

CONSTRUCTION

Conductor

Material :	Plain Annealed Copper Wire
Size :	28AWG
Construction :	Stranded (7/0.12mm)

Insulation

Material :	PP
Nominal O.D :	0.95mm
Color :	White, Black, Red, Green, Yellow, Blue

All values subject to factory tolerances.

Samson tries to ensure accuracy at the time of issue and reserves the right to change the data of the products without notice.

Copyright © 2013 Samson Electric Wire Co., Ltd. All Rights Reserved.

Issue : 02 | Date : 27-07-2015 | Page 1 of 2



C1230020122

(TC-6WF)

Flat Telephone Cable

Sheath

Material :	PVC
Nominal O.D :	2.5 x 7.0mm
Color :	White

PHYSICAL PROPERTIES

Min. Bend Radius	25mm
Operating Temperature	-15°C to 70°C

ELECTRICAL PROPERTIES

Max. Conductor DC Resistance @ 20°C	226.7Ω/km
Voltage test : Core to Core	1kV a.c/1min