


# Single Row

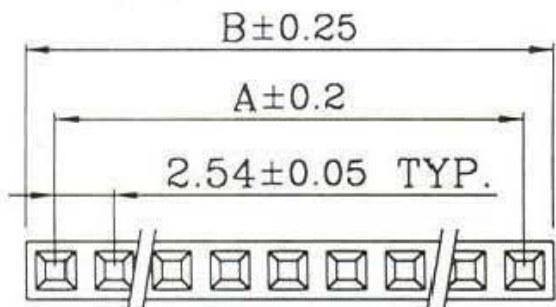

## SPECIFICATION:

PITCH BETWEEN POLES : 2.54mm

CURRENT RATING : 3A

VOLTAGE RATING : 250V AC/DC

CONTACT RESISTANCE : INITIAL VALUE/10mΩ max.

AFTER ENVIRONMENTAL TESTING/20mΩ max.

INSULATION RESISTANCE : 1000MΩ(min.)

WITHSTAND VOLTAGE : 1000V AC/MINUTE

TEMPERATURE RANGE : -25°C TO +85°C


APPLCABLE WIRE: AWG #22 TO #28

## FEATURES:

AVAILABLE NUMBER OF CIRCUITS 2 TO 40

MATERIAL : PBT UL94V-0

## Dimensional and Order information

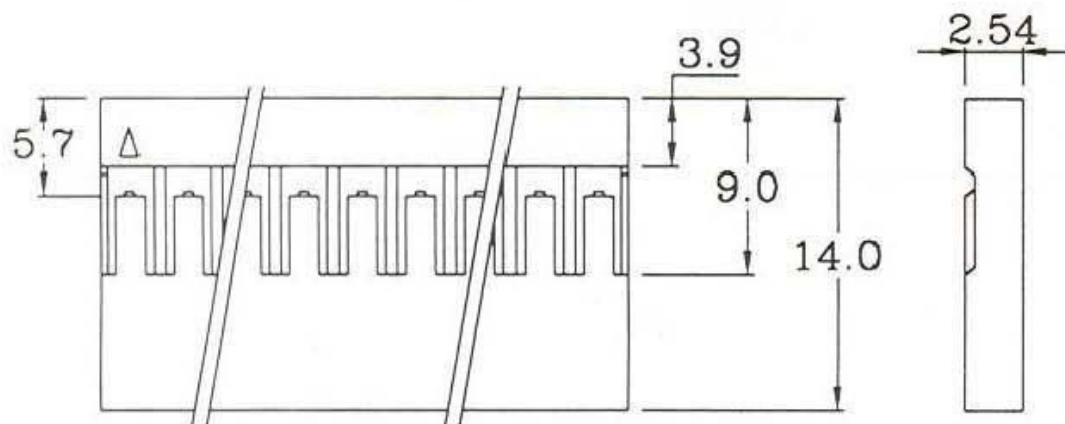

Circuits	Dimensions mm		Circuits	Dimensions mm	
	A	B		A	B
1		2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

所有材料為  
"環保材料"  
2006.10.19  
**RoHS**

DESCRIPTION: 杜邦 2.54 單排 HSG	DRAWN: DANIEL	GENERAL TOLERANCE .000 ± 0.08 .00 ± 0.15 .0 ± 0.25	REV: R1	REV	DESCRIPTION	DATE
	CHECKED: MANDY		UNIT: mm	R0		
PART NO: YY09Cxx	APPROVAL: Johnny	SCALE: FREE	SIZE: A4	R1	修改接觸阻抗單位	2006.11.19
DWG NO:			SHEET: 1/1	R2		
				R3		