

## DESCRIPTIONS 10W, AC/DC Converter



**CE Report**    **UK CA Report**  
 EN62368-1    BS EN62368-1

### FEATURES

- Universal 85-305VAC or 100-430VDC input voltage
- Operating ambient temperature range: -40°C to +85°C
- High I/O isolation test voltage up to 4200VAC
- Up to 82% efficiency
- Output short circuit, over-current, over-voltage protection
- 5000m altitude application
- Plastic case meets UL94V-0 flammability
- Meets Emissions CLASS B and surge ±2KV/±4KV without additional circuits
- OVC III (meet IEC62477-1, 2000m altitude)

### APPLICATIONS

- Industrial
- Electric power
- Civil applications

### Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN/BS EN	APH10-03	6.6	3.3V/2000mA	70	26000
	APH10-05	10	5V/2000mA	76	9800
	APH10-09		9V/1100mA	78	3600
	APH10-12		12V/900mA	80	2400
	APH10-15		15V/700mA	81	1200
	APH10-24		24V/450mA	82	400

Note: 1.\*Use suffix " E2" for chassis and suffix " D4" for DIN-Rail mounting.  
 2.The product picture is for reference only. For details, please refer to the actual product.

## Specifications

Product Specifications	Item	Operating Conditions	Min.	Typ.	Max.	Unit		
Input Specifications	Input Voltage Range	AC input	85	--	305	VAC		
		DC input	100	--	430	VDC		
	Input Frequency		47	--	63	Hz		
	Input Current	115VAC	--	--	0.26	A		
		230VAC	--	--	0.16			
	Inrush Current	115VAC	--	13	--			
		230VAC	--	23	--			
	Leakage Current	270VAC/50Hz	0.25mA RMS Max.					
Recommended External Input Fuse		2A/300V, slow-blow, required						
Hot Plug		Unavailable						
Output Specifications	Output Voltage Accuracy	3.3V output	--	±3	--	%		
		Others	--	±2	--			
	Line Regulation	Full load	--	±0.5	--			
	Load Regulation	0% -100% load	--	±1	--			
	Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	50	100	mV		
	Temperature Coefficient		--	±0.02	--	%/°C		
	Stand-by Power Consumption	230VAC	--	--	0.3	W		
	Short Circuit Protection		Hiccup, continuous, self-recovery					
	Over-current Protection		≥150% I <sub>o</sub> , self-recovery					
	Over-voltage Protection	3.3/5V output	≤7.5VDC (Hiccup)					
		9V output	≤15VDC (Hiccup)					
		12/15V output	≤20VDC (Hiccup)					
		24V output	≤30VDC (Hiccup)					
Minimum Load		0	--	--	%			
Hold-up Time	115VAC input	--	8	--	ms			
	230VAC input	--	65	--				
General Specifications	Isolation	Input - output	Electric Strength Test for 1min., leakage current <5mA	4200	--	--	VAC	
		Input - PE		2500	--	--		
		Output - PE		1250	--	--		
	Impulse Withstand Voltage	Input - output		1.2/50μs impulse waveform, three positive/ negative pulses, interval ≥ 5s. There is no breakdown	6000	--	--	VDC
		Input - PE			6000	--	--	




		Output - PE	discharge during the test.	6000	--	--	
	Insulation Resistance	Input - output	At 500VDC	100	--	--	MΩ
		Input - PE		100	--	--	
		Output - PE		100	--	--	
	Operating Temperature			-40	--	+85	°C
	Storage Temperature			-40	--	+105	
	Storage Humidity			--	--	95	%RH
	Soldering Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s			
			Manual-welding	360 ± 10°C; time: 3 - 5s			
	Switching Frequency			--	65	--	kHz
	Power Derating		-40°C to -25°C	2.67	--	--	%°C
			+55°C to +70°C	2.67	--	--	
			+70°C to +85°C	1.33	--	--	
			85VAC - 100VAC	1.67	--	--	%VAC
			277VAC - 305VAC	0.71	--	--	
		2000m - 5000m	6.67	--	--	%/Km	
Safety Class			CLASS I				
MTBF		MIL-HDBK-217F@25°C	> 500,000 h				
<b>Mechanical Specifications</b>	Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)				
	Dimension	Horizontal package	55.00 x 45.00 x 21.00 mm				
		E2 chassis mounting	96.10 x 54.00 x 29.50 mm				
		D4 Din-Rail mounting	96.10 x 54.00 x 34.10 mm				
	Weight	Horizontal package/E2 chassis mounting/D4 Din-Rail mounting		75g (Typ.)/125g (Typ.)/165g (Typ.)			
Cooling Method		Free air convection					

Note: \*The "parallel cable" method is used for ripple and noise test.

## Electromagnetic Compatibility (EMC)



<b>Electromagnetic Compatibility (EMC)</b>	Emissions (EMI)	CE	CISPR32/EN55032 CLASS B				
		RE	CISPR32/EN55032 CLASS B				
	Immunity (EMS)	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A		
		RS	IEC/EN61000-4-3	10V/m	perf. Criteria A		
		EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A		
		Surge	IEC/EN61000-4-5		line to line ±2KV/line to PE ±4KV	perf. Criteria A	
			IEC/EN61000-4-5		line to line ±4KV/line to PE ±6KV (See Fig. 2 for recommended circuit)	perf. Criteria A	
		CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A		
	Voltage dip, short interruption and voltage variation		IEC/EN61000-4-11	0%, 70%	perf. Criteria B		

## Characteristic Curve



Note: ① With an AC input between 85-100VAC/277-305VAC and a DC input between 100-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling.

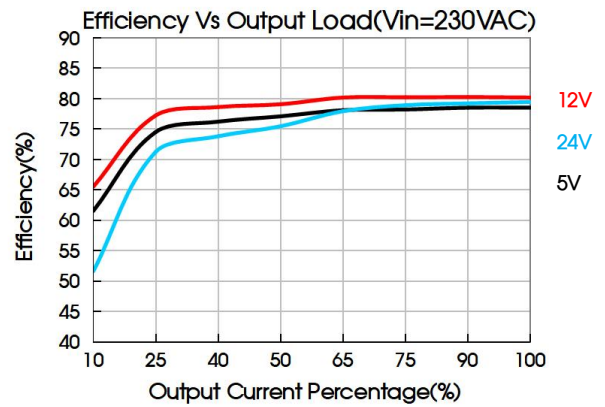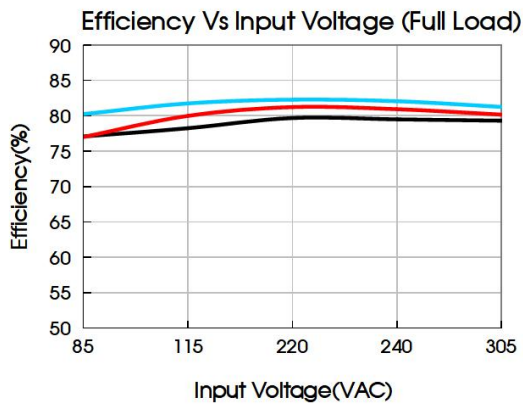

## Design Reference

### 1. Typical application

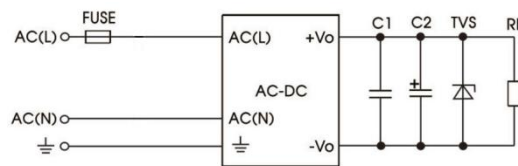


Fig. 1: Typical circuit diagram

Part No.	C1	C2	FUSE	TVS
APH10-03	1uF/50V	470uF/16V	2A/300V, slow-blow, required	SMBJ7.0A
APH10-05		330uF/16V		SMBJ7.0A
APH10-09		120uF/35V		SMBJ12A
APH10-12		120uF/35V		SMBJ20A
APH10-15		120uF/35V		SMBJ20A
APH10-24		68uF/35V		SMBJ30A

#### Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

## 2. EMC compliance recommended circuit


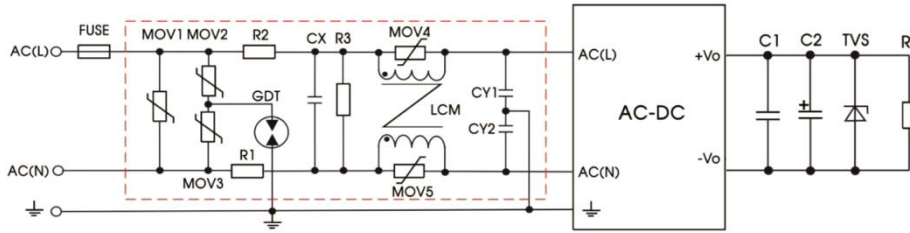


Fig. 2: EMC application circuit with higher requirements

Component	Recommended value	Component	Recommended value
MOV1	S20K350	CY1/CY2	2200pF/400VAC
MOV2/MOV3	S14K350	GDT	B 5G3600
MOV4/MOV5	S07K350	R3	1MΩ/2W(wire-wound resistor, required)
CX	0.15uF/310VAC	FUSE	2A/300V, slow-blow, required
R1/R2	2Ω/3W (wire-wound resistor, required)		
LCM	15mH		


Note: R3 (required) can also be replaced by 4 pieces of 1.5MΩ/1206 SMD resistors in series and parallel.

## Dimensions and Recommended

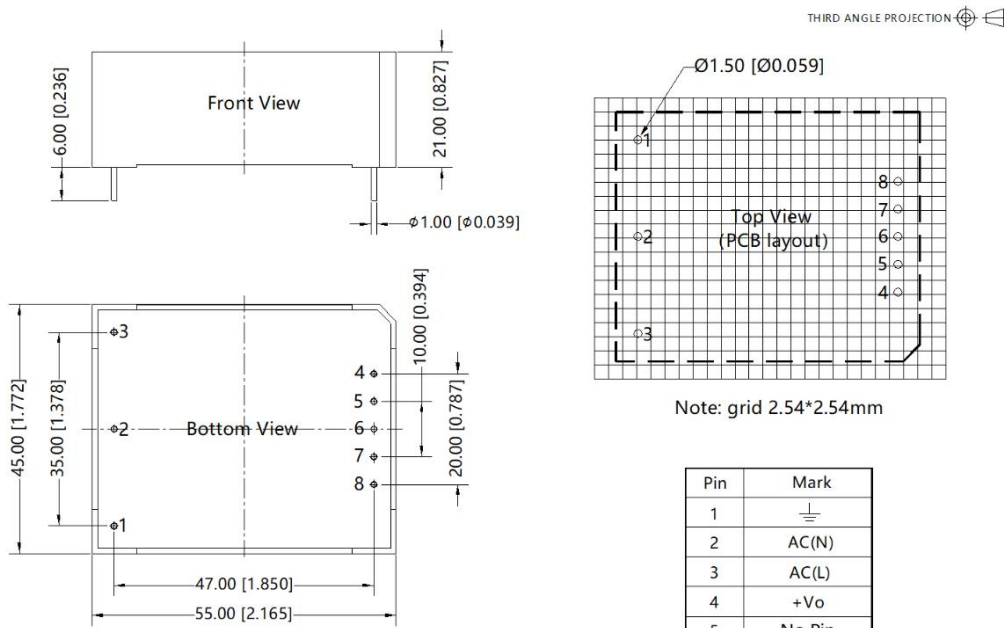

Note:  
 Unit: mm[inch]  
 Pin diameter tolerances: ±0.10[±0.004]  
 General tolerances: ±0.50[±0.020]

## E2 Dimension

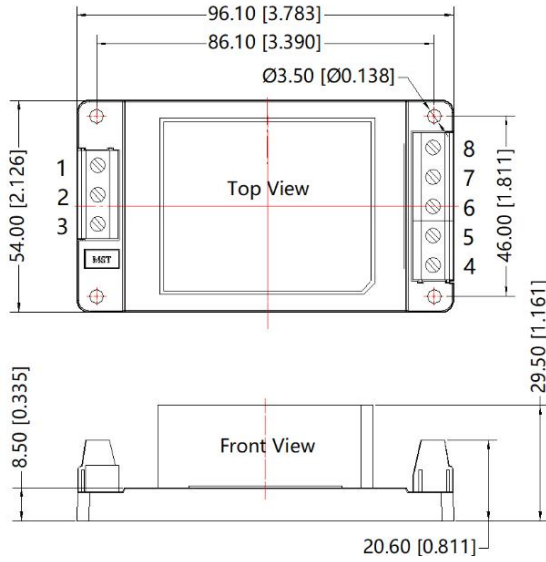


THIRD ANGLE PROJECTION

Pin	Mark
1	
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

Note:  
 Unit: mm[inch]  
 Wire range: 24-12 AWG  
 Tightening torque: Max 0.4 N-m  
 General tolerances:  $\pm 1.00[\pm 0.039]$

## D4 Dimension

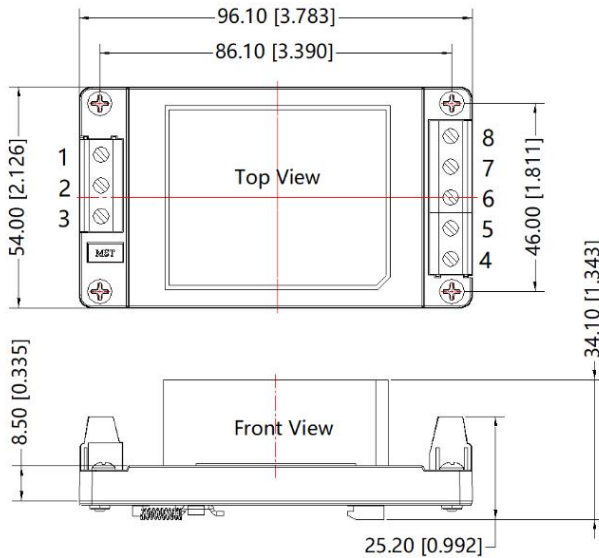

THIRD ANGLE PROJECTION

Pin	Mark
1	
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

Note:  
 Unit: mm[inch]  
 Mounting rail: TS35, rail needs to connect safety ground  
 Wire range: 24-12 AWG  
 Tightening torque: Max 0.4 N-m  
 General tolerances:  $\pm 1.00[\pm 0.039]$

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.