
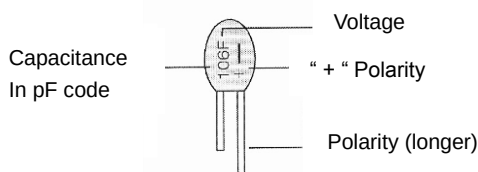
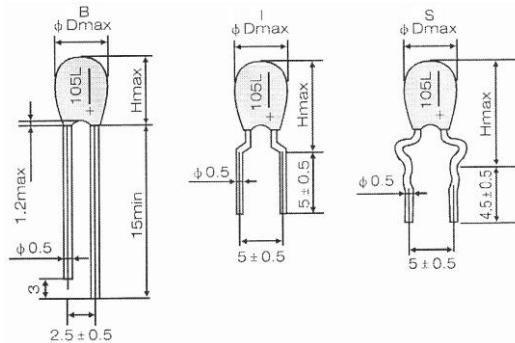


SERIES CA42 SOLID TANTALUM ELECTROLYTIC CAPACITORS

- Resin-coated, High performance to standard for general
- For color television, computer, military & consumer Instrument and other industrial electronic products

Specification

Operation Temperature	: -55°C ~ +125°C
Rated Voltage	: 4V ~ 50V
Capacitor Range	: 0.1 ~ 470 μF
Capacitor Tolerance	: ±10% (K) , ±20% (M)



Dimensions

Case size	D max	Form B	Form I	Form S
		H max	H max	H max
A	3.5	6.0	9.3	10.0
B	3.8	6.5	9.8	10.5
C	4.4	7.5	10.5	11.5
D	4.8	8.5	11.5	12.5
E	5.2	9.5	12.5	13.5
F	6.0	10.5	13.5	14.5

Standard Size, Rated Voltage, Surge Voltage at 85°C and Derating Voltage at 125°C

Rated Voltage (V)		4	6.3	10	16	25	35	50
		0G	0J	1A	1C	1E	1V	1H
85°C Surge Voltage (V)		5.2	8	13	20	32	46	65
125°C Derating Voltage (V)		2.5	4	6.3	10	16	22	32
Cap(μF)	Code	Case Code						
0.1	104						A	A
0.15	154						A	A
0.22	224						A	A
0.33	334						A	A
0.47	474					A	A	A
0.68	684				A	A	A	B
1	105				A	A	A	B
1.5	155				A	A	A, B	C
2.2	225				A	A	B	C
3.3	335			A	A	B	C	D
4.7	475		A	A	B	B	C	E
6.8	685		A	A	B	C	D	F
10	106	A	A	A	C	C	D	F
15	156	A, B	B	B	C	D	D, E	G
22	226	B	B	C	D	E	E, F	
33	336	C	C	C	E	E	F	
47	476	C	C	D	F	F	G	
68	686	D	D	E	F	G	G	
100	107	D	E	D	G			
150	157	E	F	D	G			
220	227	F	F	G				
330	337	F	G	G				
470	477	G	G					