

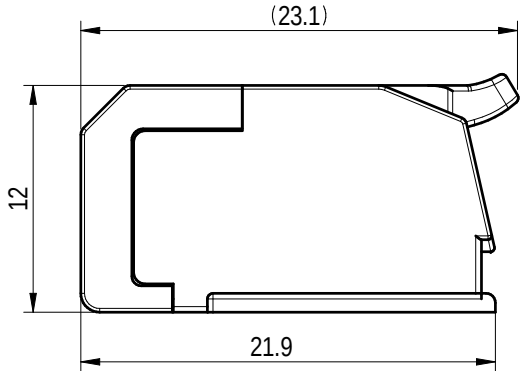
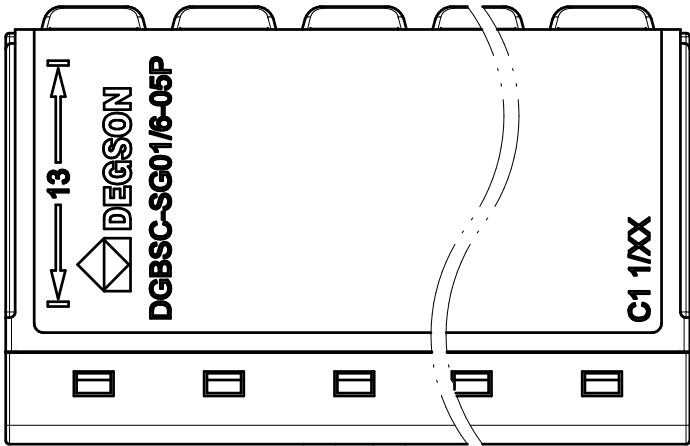
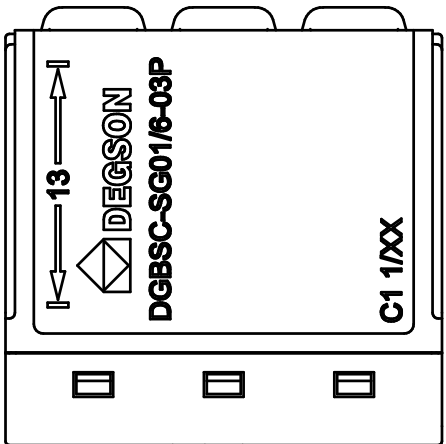
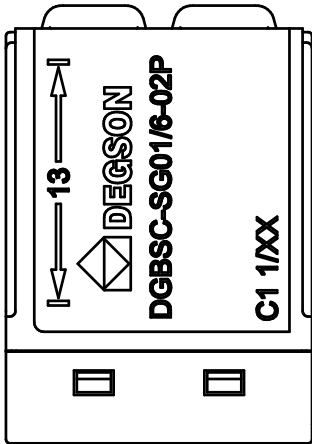
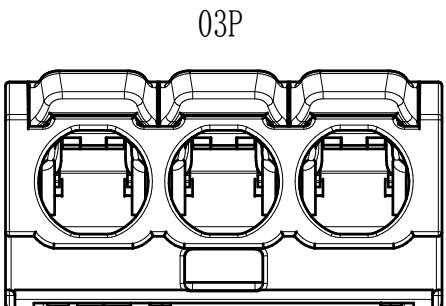

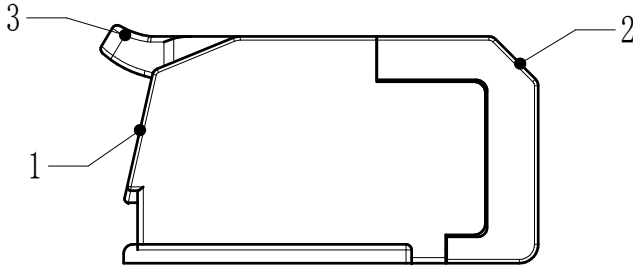
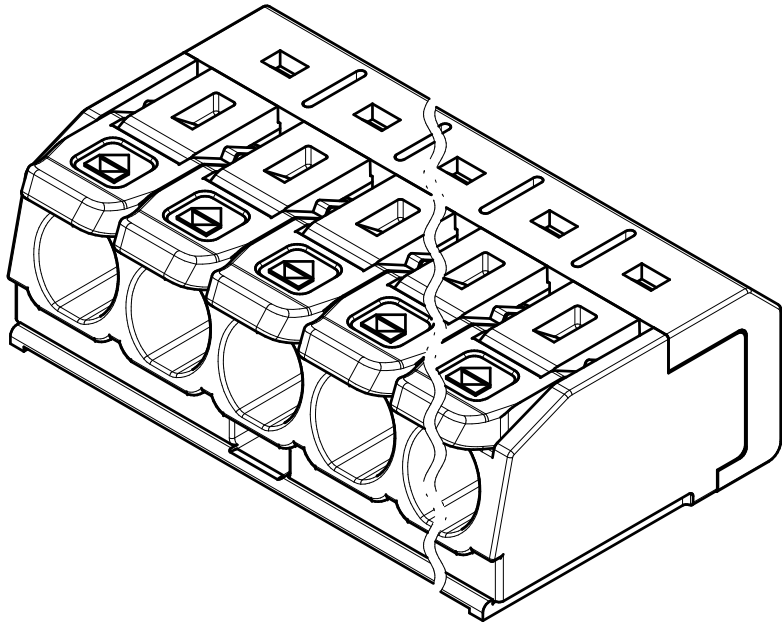


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权外, 复制或传播本文件内容, 或在本文件基础上进行发明、实用新型或外观设计专利, 均须承担法律责任。本公司保留所有权利。

未注公差/General tolerances(mm)													
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2°

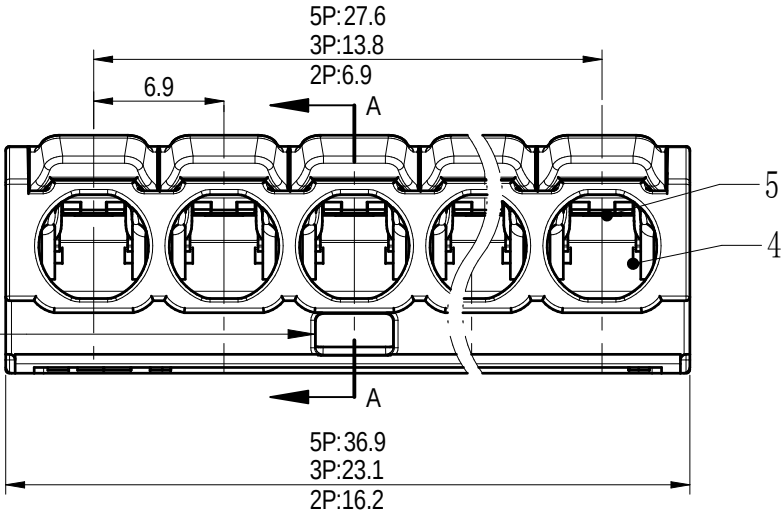

The test hole at 02P is on the right

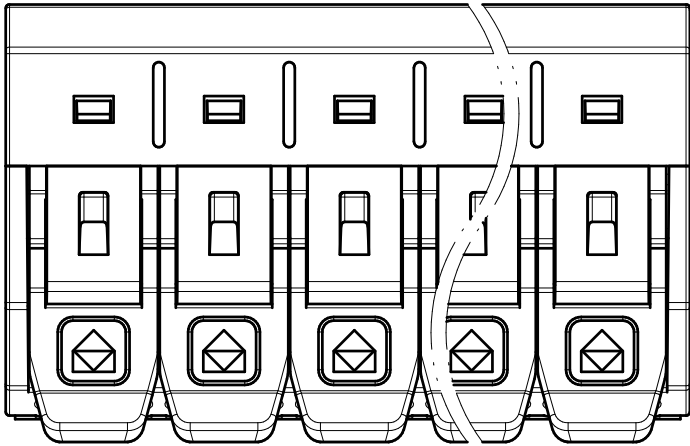

5	Current carrier	Copper	Sn Plated	
4	Spring	Stainless steel	/	
3	Button	PA66+GF	UL94V-0	
2	Cover	PC	UL94V-2	
1	Housing	PC	UL94V-2	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	600/30	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/41	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		20~10/ 0.5~6		
间距/Pitch(mm)/线数范围/Poles		6.9/N=2P、3P、5P		
剥线长度/Stripping length(mm)		12~14		
使用温度范围/Operating temperature(°C)		-40~+85(IEC)		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL:		SURFACE/COLOR:			
		MAT NO./REV:		/ 00		MAT STATUS: 小批量	
APPD: 蓝贵凡		2025-4-2		NAME DGBSC-SG01/6-XXP(1Y-00ZH)			
CHKD: 汪德荣		2025-4-2					
DRFT: 朱伟明		2025-4-2					
DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
200328683		CUSTOMER DRAWING		work		2.5:1	1/1

00			朱伟明	2025-4-2
REV	ECN	DESCRIPTION	DRFT	DATE