



Off-Grid Series

100Wp



Off-Grid



Anti-Reflective- shock
resistant tempered glass



Suitable for AC and DC
applications



Reliable and flexible
product range





5 Year Warranty for
Materials and Processing

18,48%
MAX MODULE
EFFICIENCY

0~+5W
POWER
TOLERANCE

Diagram

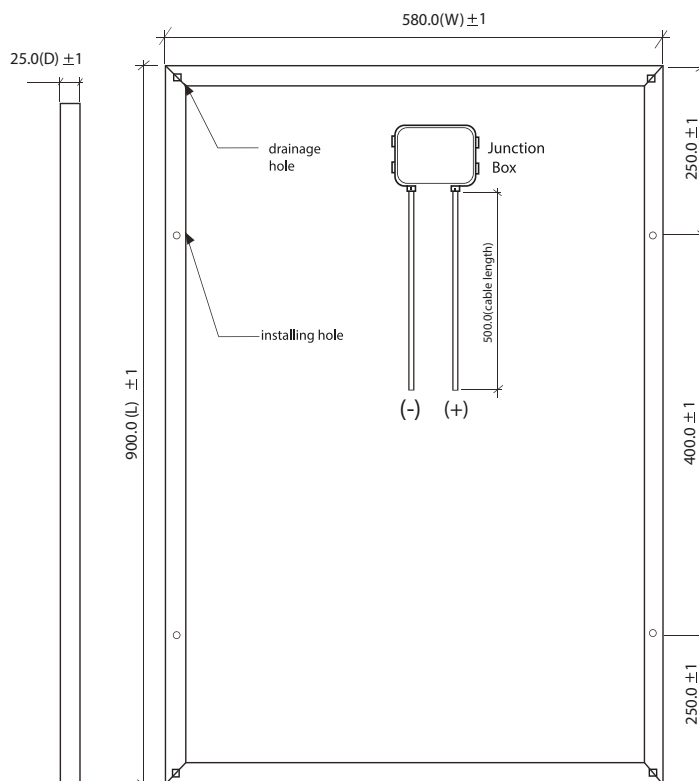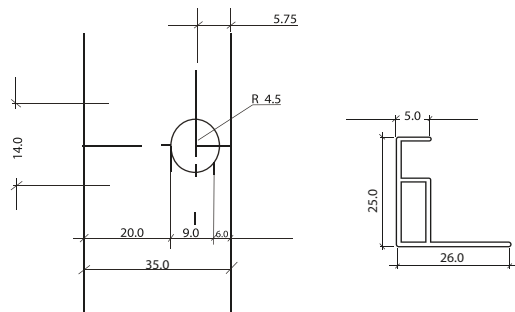

Mechanical Parameters

Cell Orientation	36(6*6)
Junction Box	IP65, 1 bypass-diodes
Output Cable	500mm
Glass	3,2mm solar glass
Frame	Anodized aluminium
Weight	5.5kg
Dimensions (mm)	900*580*25

Electrical Characteristics

Module Type	Testing Condition	Maximum Power	Open circuit voltage(V)	Short circuit current (A)	Voltage at Maximum power (V)	Current at Maximum Power (A)	Module Efficiency
100WP	STC	100	24,50	5,16	20.30	4.93	18,48%

Operating Parameters

Operational Temp	minus 40°C to 85°C
Power Output Tolerance	0~+5Wp
Maximum System Voltage	1000V DC
Maximum Series Fuse Rating	10A
Nominal Operating Cell Temperature	48°C +2°C

Temperature Ratings STC

Temperature Coefficient of is	(+)0,04%/K
Temperature Coefficient of Voc	(-)0,30%/K
Temperature Coefficient of Pmax	(-)0,40%/K