



EV-32 SERIES VOLTAGE SELECTOR SWITCHES

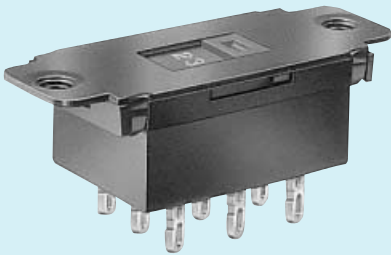

GENERAL SPECIFICATIONS

CONTACT RESISTANCE : 20mΩ INITIAL (MAX)
INSULATION RESISTANCE : 500MΩ (MIN) 500VDC
WITHSTAND VOLTAGE : 2000 VAC-1 MINUTE
LIFE EXPECTANCY : 300 CYCLES

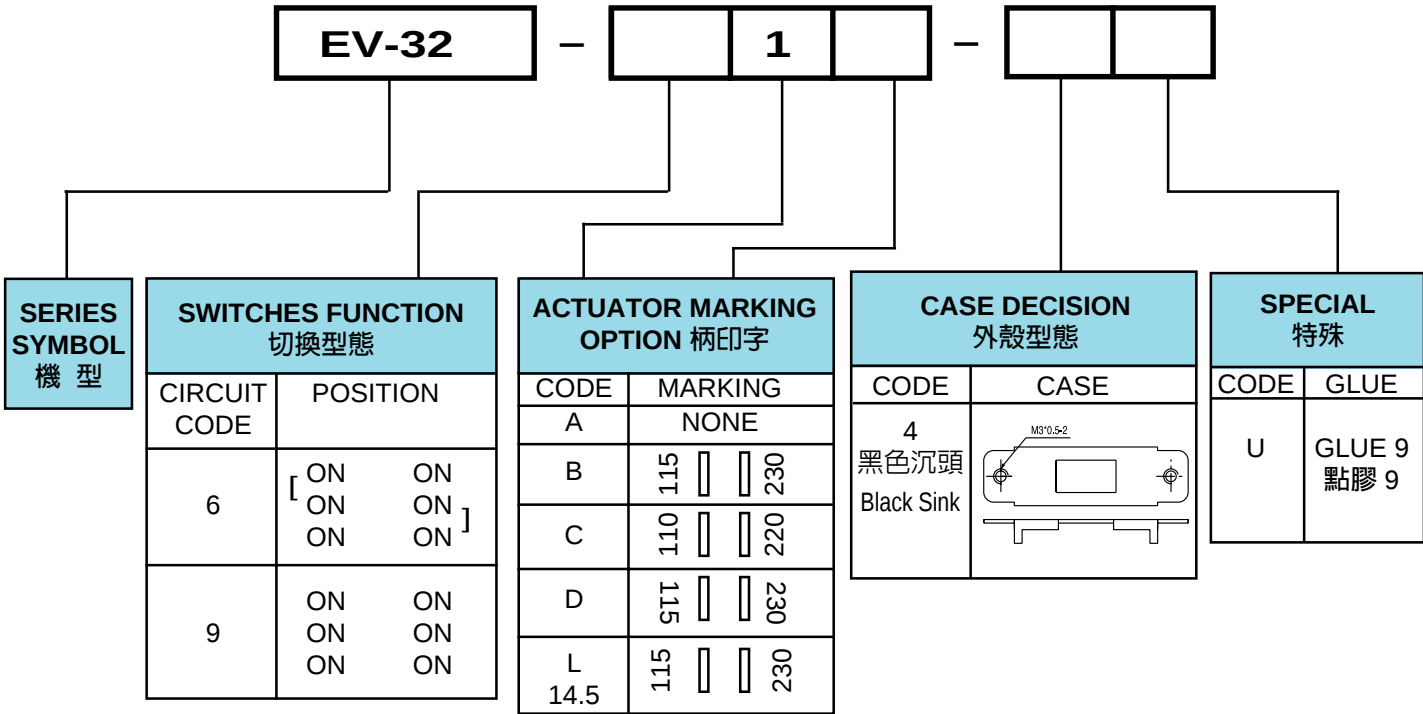




EV-32 SERIES VOLTAGE SELECTOR SWITCHES

PART NO : EV-32-91B-4U

STANDARD TRAVEL

SPECIFICATION

1. RATING : 10A 250VAC
10(1)A 250V~μ T85
2. OPERATION FORCE :
1500±300 GRAM



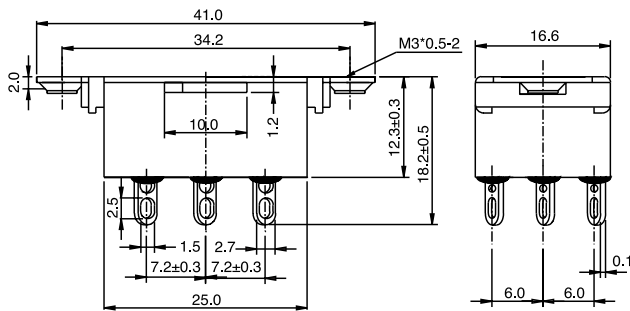


PART NO : EV-32-61B-4U

STANDARD TRAVEL

SPECIFICATION

1. RATING : 10A 250VAC
10(1)A 250V~μ T85
2. OPERATION FORCE :
1500±300 GRAM

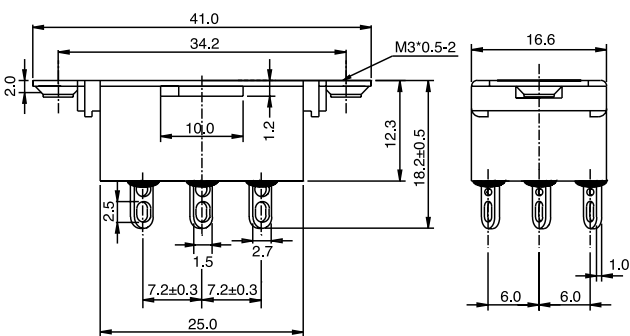

EV-32 SPECIFICATIONS

ITEM 項目			EV-32
OPERATING TEMPERATURE RANGE 使用溫度範圍			0~85°C
RATINGS 定格			12A 125/250VAC, 10(1)A 250V~μT85
ELECTRICAL PERFORMANCE 電氣性能	CONTACT RESISTANCE 接觸阻抗		50mΩ
	INSULATION RESISTANCE 絕緣阻抗		500MΩ
	VOLTAGE PROOF 耐電壓	Terminal To case	3800VAC-1 minute
MECHANICAL CHARACTERISTICS 機械性能	OPERATING FORCE 動作力		1500±300g
	TERMINAL STRENGTH 端子強度		6kg/1 minute
	ACTUATOR STRENGTH 操作部強度		6kg/15 sec
	VIBRATION 耐振性		10 to 55HZ, 全振幅 1.5mm Total amplitude 1.5mm 3 方向各 2 小時 3 directions for 2H each
	WITHSTAND SOLDERING HEAT 耐焊錫性	MANUAL SOLDERING 手焊式	350±10°C 5±1sec
		DIP SOLDERING 錫爐式	_____
	SOLDER ABILITY 焊錫性		230±5°C 3±0.5sec
DURABILITY 耐久性能	OPERATING LIFE 動作壽命		300 cycles
ENVIRONMENTAL PERFORMANCE 耐候性	COLD ENDURANCE 耐寒性		-20±2°C for 96H
	HEAT ENDURANCE 耐熱性		85±2°C for 96H
	HUMIDITY ENDURANCE 耐濕性		40±2°C 90 to 95%RH for 96H