



Typical Applications/典型应用:


● Smart Cars, Automation Equipment, Automatic Doors And Windows
智能小车, 自动化设备, 自动门窗

● Vending Machine, Smart Home, office Equipment
自动售货机, 智能家居, 办公设备

● Automatic Grill, Automatic Drying Rack, Parking Lock, Medical Equipment
自动烧烤架, 自动晾衣架, 车位锁, 医疗器械

Dimension /外形尺寸

UNIT:MILLIMETERS
WEIGHT: 160.0g(APPROX)

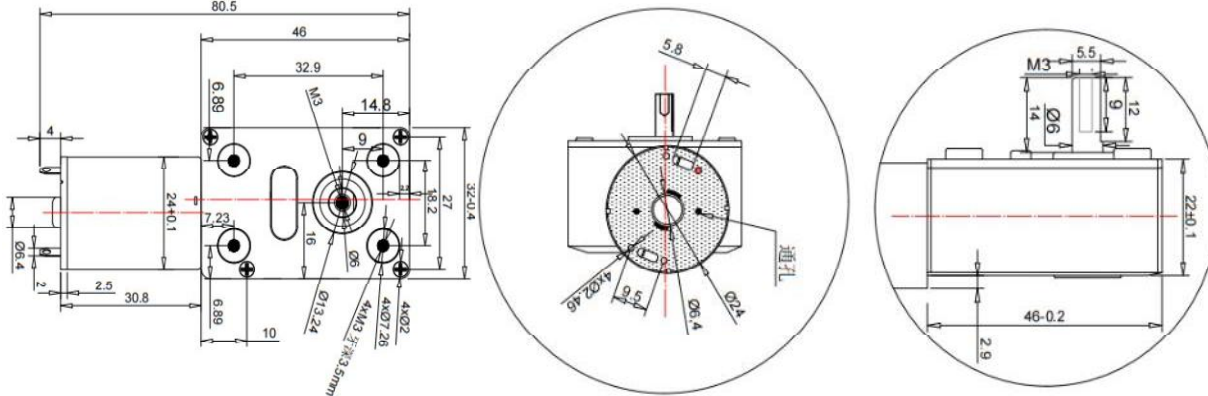

Datasheet /性能参数表

新永泰电机型号 XYT Motor Model	减速比 Reduction ratio	空载No-Load			额定负载Rated Load				堵转 Stall		减速箱 长度 Gearbox Length (MM)	输出 转向 Direction	启动电 压 Starting Voltage(V)
		额定电 压Rated Voltage (V)	转数 Speed (RPM ±10%)	电流 Current (A)	转数 Speed (RPM ±10%)	电流 Current (A)	转矩 Torque (Kg.cm)	功率 Power(W)	转矩 Torque (Kg.cm)	电流 Current (A)			
JGY-370-0660	40	6	150	0.10	100	0.4	1.20	2.40	4	1.8	46*32	CW	1
JGY-370-0660	65	6	90	0.10	70	0.4	2.00	2.40	6	1.8	46*32	CCW	1
JGY-370-0660	87	6	68	0.10	51	0.4	2.80	2.40	8	1.8	46*32	CCW	1
JGY-370-0660	150	6	40	0.10	30	0.4	4.50	2.40	15	1.8	46*32	CCW	1
JGY-370-0660	200	6	30	0.10	22	0.4	6.00	2.40	20	1.8	46*32	CCW	1
JGY-370-0660	260	6	23	0.10	17	0.4	8.00	2.40	26	1.8	46*32	CCW	1
JGY-370-0660	340	6	18	0.10	13	0.4	12.00	2.40	34	1.8	46*32	CCW	1
JGY-370-0660	448	6	13	0.10	10	0.4	13.00	2.40	40	1.8	46*32	CW	1
JGY-370-0660	600	6	10	0.10	7	0.4	17.00	2.40	54	1.8	46*32	CW	1
JGY-370-0660	1000	6	6	0.10	4	0.4	25.00	2.40	91	1.8	46*32	CW	1
JGY-370-0660	1800	6	3.3	0.10	2.5	0.4	25.00	2.40	91	1.8	46*32	CCW	1
JGY-370-0660	3000	6	2	0.10	1.5	0.4	25.00	2.40	91	1.8	46*32	CCW	1
JGY-370-1260	40	12	150	0.06	100	0.2	1.20	2.40	4	1.3	46*32	CW	1
JGY-370-1260	65	12	90	0.06	70	0.2	2.00	2.40	6	1.3	46*32	CCW	1
JGY-370-1260	87	12	68	0.06	51	0.2	2.80	2.40	8	1.3	46*32	CCW	1
JGY-370-1260	150	12	40	0.06	30	0.2	4.50	2.40	15	1.3	46*32	CCW	1
JGY-370-1260	200	12	30	0.06	22	0.2	6.00	2.40	20	1.3	46*32	CCW	1
JGY-370-1260	260	12	23	0.06	17	0.2	8.00	2.40	26	1.3	46*32	CCW	1
JGY-370-1260	340	12	18	0.06	13	0.2	12.00	2.40	34	1.3	46*32	CCW	1
JGY-370-1260	448	12	13	0.06	10	0.2	13.00	2.40	40	1.3	46*32	CW	1
JGY-370-1260	600	12	10	0.06	7	0.2	15.00	2.40	54	1.3	46*32	CW	1
JGY-370-1260	1000	12	6	0.06	4	0.2	25.00	2.40	91	1.3	46*32	CW	1
JGY-370-1260	1800	12	3.3	0.06	2.5	0.2	25.00	2.40	91	1.3	46*32	CCW	1
JGY-370-1260	3000	12	2	0.06	1.5	0.2	25.00	2.40	91	1.3	46*32	CCW	1
JGY-370-2460	40	24	150	0.04	100	0.1	1.20	2.40	4	1.1	46*32	CW	1
JGY-370-2460	65	24	90	0.04	70	0.1	2.00	2.40	6	1.1	46*32	CCW	1
JGY-370-2460	87	24	68	0.04	51	0.1	2.80	2.40	8	1.1	46*32	CCW	1
JGY-370-2460	150	24	40	0.04	30	0.1	4.50	2.40	15	1.1	46*32	CCW	1
JGY-370-2460	200	24	30	0.04	22	0.1	6.00	2.40	20	1.1	46*32	CCW	1
JGY-370-2460	260	24	23	0.04	17	0.1	8.00	2.40	26	1.1	46*32	CCW	1
JGY-370-2460	340	24	18	0.04	13	0.1	12.00	2.40	34	1.1	46*32	CCW	1

JGY-370-2460	448	24	13	0.04	10	0.1	13.00	2.40	40	1.1	46*32	CW	1
JGY-370-2460	600	24	10	0.04	7	0.1	15.00	2.40	54	1.1	46*32	CW	1
JGY-370-2460	1000	24	6	0.04	4	0.13	25.00	2.40	91	1.1	46*32	CW	1
JGY-370-2460	1800	24	3.3	0.04	2.9	0.1	25.00	2.40	91	1.1	46*32	CCW	1
JGY-370-2460	3000	24	2	0.04	1.5	0.1	25.00	2.40	91	1.1	46*32	CCW	1
JGY-370-0685	40	6	210	0.18	160	0.8	1.70	4.80	6.4	2.4	46*32	CW	1
JGY-370-0685	65	6	130	0.18	100	0.8	2.60	4.80	10	2.4	46*32	CCW	1
JGY-370-0685	87	6	97	0.18	74	0.8	3.50	4.80	13	2.4	46*32	CCW	1
JGY-370-0685	150	6	55	0.18	40	0.8	6.00	4.80	23	2.4	46*32	CCW	1
JGY-370-0685	200	6	40	0.18	30	0.8	8.00	4.80	31	2.4	46*32	CCW	1
JGY-370-0685	260	6	32	0.18	24	0.8	10.00	4.80	40	2.4	46*32	CCW	1
JGY-370-0685	340	6	25	0.18	20	0.8	13.00	4.80	53	2.4	46*32	CCW	1
JGY-370-0685	448	6	18	0.18	14	0.8	16.00	4.80	62	2.4	46*32	CW	1
JGY-370-0685	600	6	14	0.18	10	0.8	22.00	4.80	83	2.4	46*32	CW	1
JGY-370-0685	1000	6	8	0.18	6	0.8	25.00	4.80	100	2.4	46*32	CW	1
JGY-370-0685	1800	6	4.7	0.18	3.6	0.8	25.00	4.80	100	2.4	46*32	CCW	1
JGY-370-0685	3000	6	2.8	0.18	2	0.8	25.00	4.80	100	2.4	46*32	CCW	1
JGY-370-1285	40	12	210	0.09	160	0.3	1.70	3.60	6.4	1.6	46*32	CW	1
JGY-370-1285	65	12	130	0.09	100	0.3	2.60	3.60	10	1.6	46*32	CCW	1
JGY-370-1285	87	12	97	0.09	80	0.3	3.50	3.60	13	1.6	46*32	CCW	1
JGY-370-1285	150	12	55	0.09	40	0.3	6.00	3.60	23	1.6	46*32	CCW	1
JGY-370-1285	200	12	40	0.09	30	0.3	8.00	3.60	31	1.6	46*32	CCW	1
JGY-370-1285	260	12	32	0.09	24	0.3	10.00	3.60	40	1.6	46*32	CCW	1
JGY-370-1285	340	12	25	0.09	20	0.3	13.00	3.60	53	1.6	46*32	CCW	1
JGY-370-1285	448	12	19	0.09	15.5	0.3	18.00	3.60	62	1.6	46*32	CW	1
JGY-370-1285	600	12	14	0.09	10	0.3	24.00	3.60	83	1.6	46*32	CW	1
JGY-370-1285	1000	12	8	0.09	6	0.3	25.00	3.60	100	1.6	46*32	CW	1
JGY-370-1285	1800	12	4.5	0.09	3.8	0.3	25.00	3.60	100	1.6	46*32	CCW	1
JGY-370-1285	3000	12	2.8	0.09	2.3	0.3	25.00	3.60	100	1.6	46*32	CCW	1
JGY-370-2485	40	24	210	0.05	160	0.15	1.70	3.60	6.4	1.6	46*32	CW	1
JGY-370-2485	65	24	130	0.05	100	0.15	2.60	3.60	10	1.6	46*32	CCW	1
JGY-370-2485	87	24	97	0.05	80	0.15	3.50	3.60	13	1.6	46*32	CCW	1
JGY-370-2485	150	24	55	0.05	40	0.15	6.00	3.60	23	1.6	46*32	CCW	1
JGY-370-2485	200	24	40	0.05	30	0.15	8.00	3.60	31	1.6	46*32	CCW	1
JGY-370-2485	260	24	32	0.05	24	0.15	10.00	3.60	40	1.6	46*32	CCW	1
JGY-370-2485	340	24	25	0.05	20	0.15	13.00	3.60	53	1.6	46*32	CCW	1
JGY-370-2485	448	24	19	0.05	15.5	0.15	18.00	3.60	62	1.6	46*32	CW	1
JGY-370-2485	600	24	14	0.05	10	0.15	24.00	3.60	83	1.6	46*32	CW	1
JGY-370-2485	1000	24	8	0.05	6	0.15	25.00	3.60	100	1.6	46*32	CW	1
JGY-370-2485	1800	24	4.5	0.05	3.8	0.15	25.00	3.60	100	1.6	46*32	CCW	1
JGY-370-2485	3000	24	2.8	0.05	2.3	0.3	25.00	3.60	100	1.6	46*32	CCW	1
JGY-370-2438	40	24	95	0.02	80	0.07	0.50	1.60	1	0.2	46*32	CW	1
JGY-370-2438	65	24	58	0.02	49	0.07	0.80	1.60	1.5	0.2	46*32	CCW	1
JGY-370-2438	87	24	43	0.02	36	0.07	1.00	1.60	2	0.2	46*32	CCW	1
JGY-370-2438	150	24	25	0.02	21	0.07	1.80	1.60	3.5	0.2	46*32	CCW	1
JGY-370-2438	200	24	19	0.02	16	0.07	2.60	1.60	5	0.2	46*32	CCW	1
JGY-370-2438	260	24	14	0.02	12	0.07	3.50	1.60	6	0.2	46*32	CCW	1
JGY-370-2438	340	24	11	0.02	9	0.07	4.60	1.60	8	0.2	46*32	CCW	1
JGY-370-2438	448	24	8	0.02	7	0.07	5.60	1.60	11	0.2	46*32	CW	1
JGY-370-2438	600	24	6	0.02	5	0.07	7.50	1.60	15	0.2	46*32	CW	1
JGY-370-2438	1000	24	3	0.02	3	0.07	12.00	1.60	25	0.2	46*32	CW	1
JGY-370-2438	1800	24	2	0.02	1.7	0.07	18.00	1.60	45	0.2	46*32	CCW	1
JGY-370-2438	3000	24	1.2	0.02	1	0.07	22.00	1.60	75	0.2	46*32	CCW	1

* Other Parameters: According To Customer Demand For Design/其他参数：根据客户的需求设计.

Conventional Custom Specifications/常规定制规格

Voltage:	<u>DC 6~12V</u>	Shaft Type:	<u>D shaft, Screw Shaft</u>
Speed:	<u>3~241rpm</u>	Shaft Length:	<u>Customizable</u>