



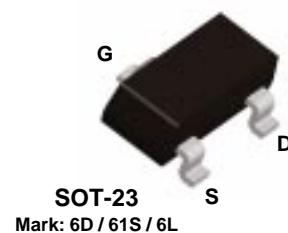

**2N5457
2N5458
2N5459**

**MMBF5457
MMBF5458
MMBF5459**

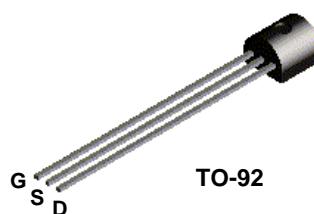

N-Channel General Purpose Amplifier

This device is a low level audio amplifier and switching transistors, and can be used for analog switching applications. Sourced from Process 55.

Absolute Maximum Ratings*

TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{DG}	Drain-Gate Voltage	25	V
V_{GS}	Gate-Source Voltage	- 25	V
I_{GF}	Forward Gate Current	10	mA
T_J, T_{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:

- 1) These ratings are based on a maximum junction temperature of 150 degrees C.
- 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

TA = 25°C unless otherwise noted

Symbol	Characteristic	Max		Units
		2N5457	*MMBF5457	
P_D	Total Device Dissipation Derate above 25°C	625 5.0	350 2.8	mW mW/°C
$R_{θJC}$	Thermal Resistance, Junction to Case	83.3		°C/W
$R_{θJA}$	Thermal Resistance, Junction to Ambient	200	357	°C/W

* Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

N-Channel General Purpose Amplifier

(continued)

Electrical Characteristics

TA = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
$V_{(BR)GSS}$	Gate-Source Breakdown Voltage	$I_D = 10 \mu A$, $V_{DS} = 0$	- 25			V
I_{GSS}	Gate Reverse Current	$V_{GS} = -15 V$, $V_{DS} = 0$ $V_{GS} = -15 V$, $V_{DS} = 0$, $T_A = 100^\circ C$		- 1.0 - 200	nA nA	
$V_{GS(off)}$	Gate-Source Cutoff Voltage	$V_{DS} = 15 V$, $I_D = 10 nA$ 2N5457 2N5458 2N5459	- 0.5 - 1.0 - 2.0		- 6.0 - 7.0 - 8.0	V V V
V_{GS}	Gate-Source Voltage	$V_{DS} = 15 V$, $I_D = 100 \mu A$ 2N5457 $V_{DS} = 15 V$, $I_D = 200 \mu A$ 2N5458 $V_{DS} = 15 V$, $I_D = 400 \mu A$ 2N5459		- 2.5 - 3.5 - 4.5		V V V

ON CHARACTERISTICS

I_{DSS}	Zero-Gate Voltage Drain Current*	$V_{DS} = 15 V$, $V_{GS} = 0$	2N5457 2N5458 2N5459	1.0 2.0 4.0	3.0 6.0 9.0	5.0 9.0 16	mA mA mA
-----------	----------------------------------	--------------------------------	---	-------------------	-------------------	------------------	----------------


SMALL SIGNAL CHARACTERISTICS

g_{fs}	Forward Transfer Conductance*	$V_{DS} = 15 V$, $V_{GS} = 0$, $f = 1.0$ kHz	2N5457 2N5458 2N5459	1000 1500 2000		5000 5500 6000	$\mu mhos$ $\mu mhos$ $\mu mhos$
g_{os}	Output Conductance*	$V_{DS} = 15 V$, $V_{GS} = 0$, $f = 1.0$ kHz			10	50	$\mu mhos$
C_{iss}	Input Capacitance	$V_{DS} = 15 V$, $V_{GS} = 0$, $f = 1.0$ MHz			4.5	7.0	pF
C_{rss}	Reverse Transfer Capacitance	$V_{DS} = 15 V$, $V_{GS} = 0$, $f = 1.0$ MHz			1.5	3.0	pF
NF	Noise Figure	$V_{DS} = 15 V$, $V_{GS} = 0$, $f = 1.0$ kHz, $R_G = 1.0$ megohm, BW = 1.0 Hz				3.0	dB


*Pulse Test: Pulse Width ≤ 300 ms, Duty Cycle $\leq 2\%$

Typical Characteristics

Transfer Characteristics

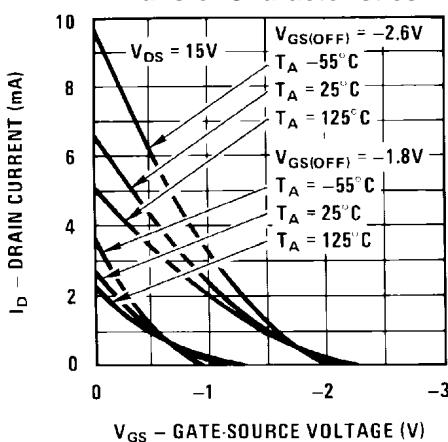


Transfer Characteristics

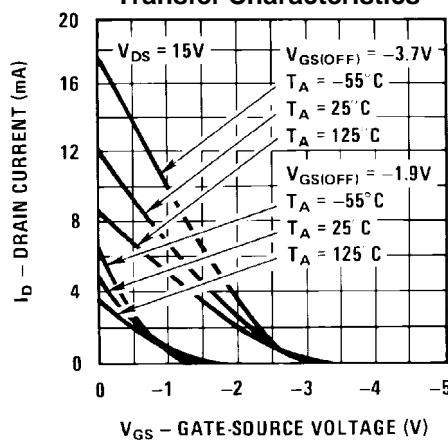


N-Channel General Purpose Amplifier (continued)

Typical Characteristics (continued)


Transfer Characteristics

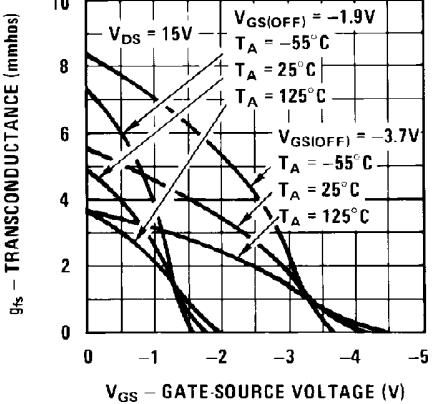


Transfer Characteristics

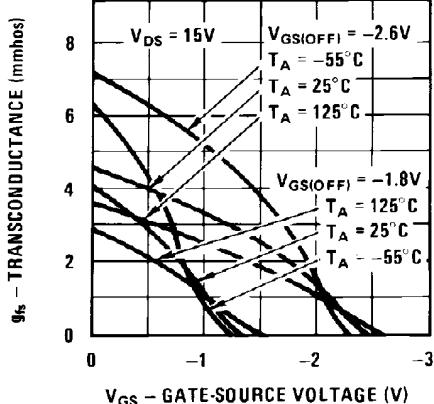


Common Drain-Source

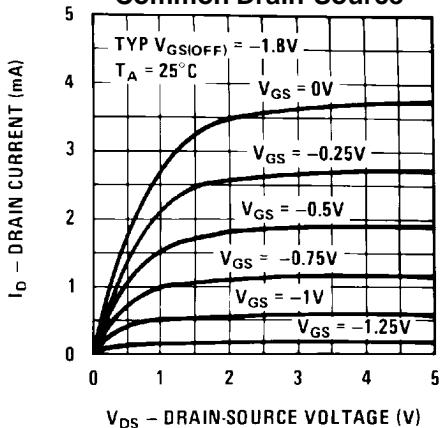


Parameter Interaction

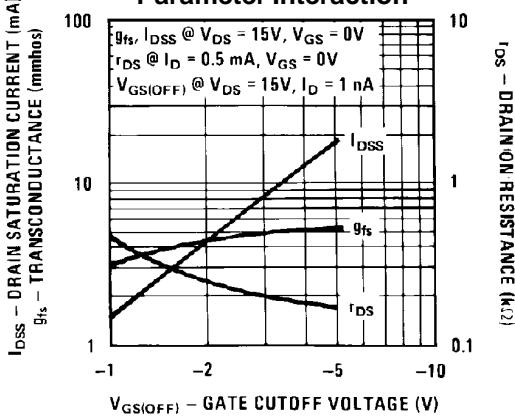

**Output Conductance vs.
Drain Current**

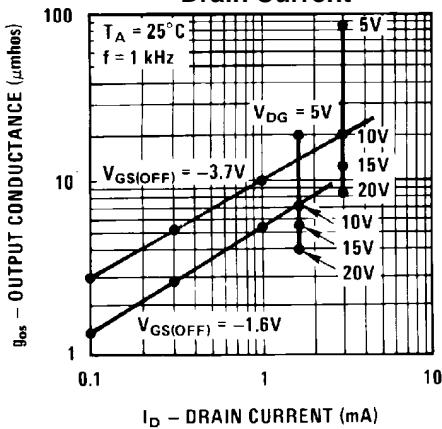

**Transconductance vs.
Drain Current**

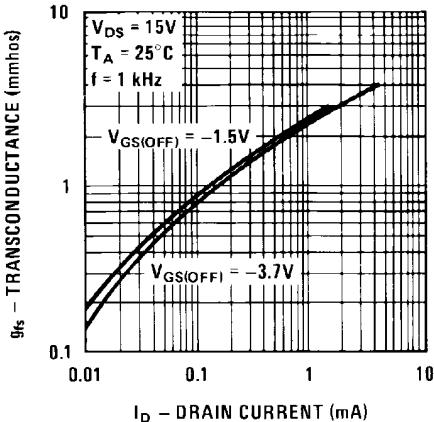


N-Channel General Purpose Amplifier


(continued)

Typical Characteristics (continued)


Channel Resistance vs. Temperature

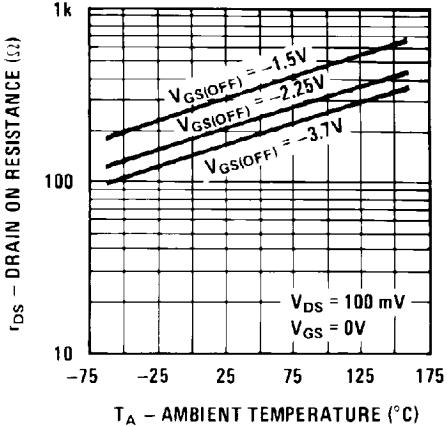

Noise Voltage vs. Frequency

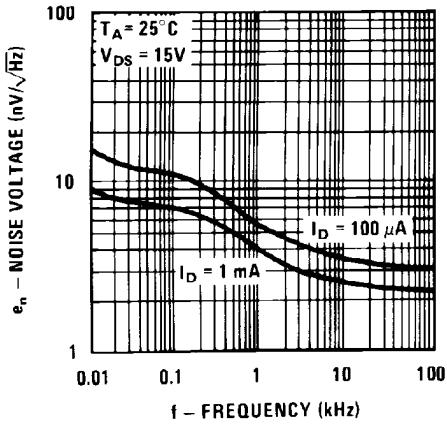

Leakage Current vs. Voltage

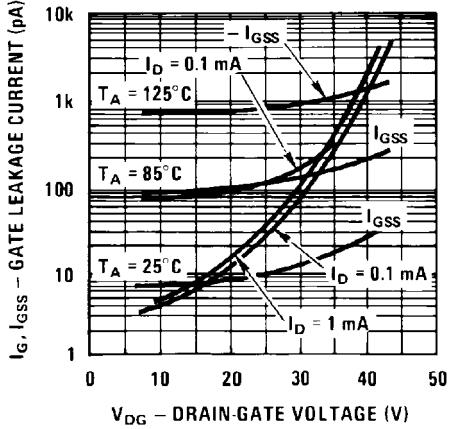

Capacitance vs. Voltage

