

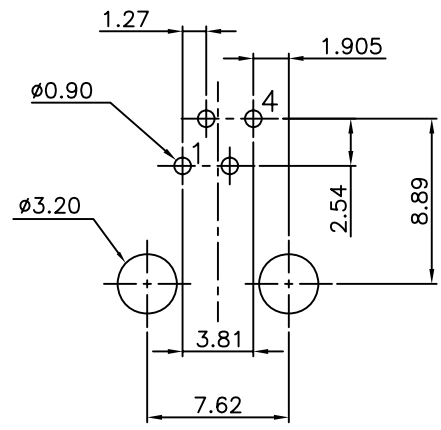
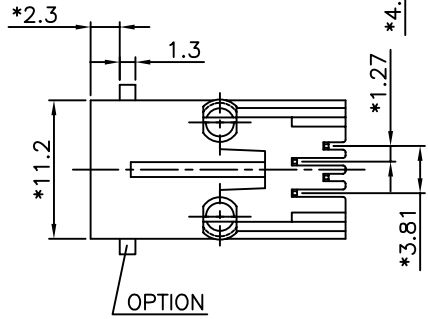


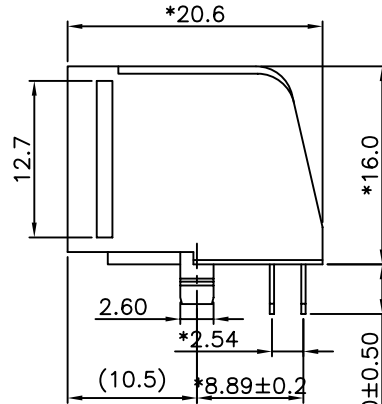

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

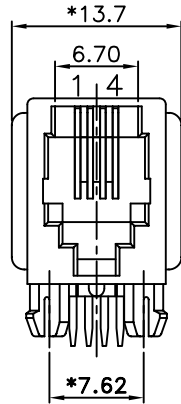

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC MIN.
2. CURRENT RATING : 1.5 AMP MIN.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX. Δ
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 1000 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN-LEAD MIN OVER 50u" NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 - Δ 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: N371X-011-XX

1- 3u" 2- 6u" 3-15u" 01-W/ PANNEL STOP
4-30u" 5-50u" 6-Pd20u" 02-W/O PANNEL STOP

Δ x2		UODATE DRAWING(1)	YANG	011209
Δ X0	000000	NEW DESIGN	SAIL	030108
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 1:1	CHECKED EVA
		Dimension Range Tolerance		APPROVED PETER
		X.X ±0.20 UNIT		
		X.XX ±0.15 mm		
		X.XXX ±0.10 SIZE A3		
		ANGLE ±5°		
		NAME	SIDE ENTRY PCB JACK 4P4C	
		PART NO.	SEE NOTE	REV. 1
		DOC. NO.	NN370A011	