




adhesive tapes catalogue

double sided tapes

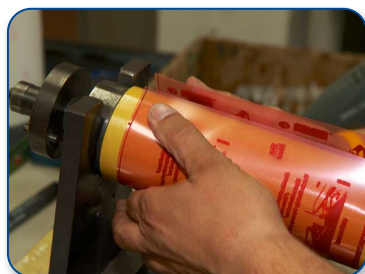

700 RDA

Fixing, mounting and fastening



Multipurpose fixing

Double sided tape to fix photographs, samples, light objects and small items. Easy to use. High tack and adhesion both sides.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
BOPP 28 µm	Synthetic rubber	Transparent (white paper liner)	0.097 mm	Ext: 22 N/25mm Int: 25 N/25mm	110 N/25mm	150 %	60 °C

713 TNT

Fixing, mounting and fastening



Medium temperature resistance

Double sided tape for applications which require a medium temperature resistance. Recommended in the leather industry. Resistance to plasticizers and UV, ageing. High conformability. Easy to tear by hand. Temperature resistance up to 100°C (short period).

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Non woven	Acrylic water based	Transparent (white paper liner)	0.107 mm	Ext: 8 N/25mm Int: 8 N/25mm	23 N/25mm	5 %	100 °C

729 GDA

Flooring and carpet



High adhesion

Standard double sided cloth carpet tape. High adhesion to secure fixing on all types of surfaces. Good tack. High conformability. Easy to tear by hand.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Synthetic cloth	Synthetic rubber	White (brown paper liner)	0.155 mm	Ext: 25 N/25mm Int: 20 N/25mm	67 N/25mm	10 %	60 °C

730 GDA

Flooring and carpet



High adhesion, all purpose tape

High performance double sided cloth carpet tape. Very high adhesion to secure fixing on difficult substrates. High tack and adhesion. High conformability. Easy to tear by hand.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Synthetic cloth	Synthetic rubber	White (brown paper liner)	0.235 mm	Ext: 30 N/25mm Int: 25 N/25mm	80 N/25mm	15 %	60 °C

756 TRANSFER

Fixing, mounting and fastening



Multipurpose, versatile

Film of adhesive without backing, general purpose, to fix various items in the industry, craft industry, at school and at home. Good adhesion on all substrates (cardboard, paper, leather, fabrics, plastics, wood). Good ageing resistance. Temperature resistance up to 80°C (up to 130°C short period).

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Without backing	Acrylic solvent based	Transparent (brown paper liner)	0.050 mm	Ext: 9.5 N/25mm Int: 9.5 N/25mm	\	\	80 °C

770 PROFIL

Car refinishing and repairing



Long term foam

Double sided black foam tape to mount plates, emblems and profiles in the automotive sector. High adhesion. Excellent resistance to UV, weather conditions and ageing. High elongation and conformability.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam 0.8 mm	Acrylic solvent based	Black (green LDPE liner)	0.850 mm	Ext: 14 N/25mm Int: 14 N/25mm	24 N/25mm	220 %	90 °C

DS FOAM 1.5

Fixing, mounting and fastening



1.5 foam, medium adhesion

Double sided foam tape suitable for wall hooks. Excellent adhesion and holding power. High bond, weatherproof and solvent resistant.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam	Acrylic adhesive	White (white paper liner)	1.500 mm	> 19.6 N/25mm	\	\	60 °C



adhesive tapes catalogue

DS FOAM 3.0

Fixing, mounting and fastening




3.0 foam, medium adhesion

Thick double sided foam tape suitable for mounting dispensers, numbers plates and other general purpose applications. Excellent adhesion and holding power.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam	Acrylic adhesive	White (white paper liner)	3.000 mm	> 19.6 N/25mm	\	\	60°C

TB7772 TOUGH BOND WHITE

Fixing, mounting and fastening




Foam like solvent acrylic adhesive

Film of viscoelastic adhesive tape. The adhesive bonds to a wide range of material including metal and glass. Most substrates are best prepared by cleaning with 50:50 mixture of isopropyl alcohol (IPA) and water prior to applying.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam	Solvent acrylic	White (MOPP red liner)	1.100 mm	49 N/25 mm (90° peel adhesion)	50 N/25mm	\	150°C

TB7774 TOUGH BOND TRANSPARENT

Fixing, mounting and fastening





Foam like solvent acrylic adhesive

Film of viscoelastic adhesive tape. The adhesive bonds to a wide range of material including metal and glass. Most substrates are best prepared by cleaning with 50:50 mixture of isopropyl alcohol (IPA) and water prior to applying.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam	Solvent acrylic	Transparent (MOPP red liner)	1.000 mm	49 N/25 mm (90° peel adhesion)	\	\	80°C

TB7776 TOUGH BOND GREY

Fixing, mounting and fastening



Foam like solvent acrylic adhesive

Film of viscoelastic adhesive tape. The adhesive bonds to a wide range of material including metal and glass. Most substrates are best prepared by cleaning with 50:50 mixture of isopropyl alcohol (IPA) and water prior to applying.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Foam	Solvent acrylic	Grey (MOPP red liner)	1.100 mm	69 N/25 mm (90° peel adhesion)	45 N/25mm	\	90°C

6750

Repulpable splicing
web processes



•••••

**High speed flying splices**

Double sided repulpable tape designed for high speed flying splices in the paper industry.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
Tissue paper	Repulpable acrylic	Light blue	0.105 mm	Ext: 2.3 N/25mm Int: 2.3 N/25mm	\	\	200 °C

EUROGRAPHIC 780/10L

Platemounting

**Thin film, brown paper liner**

Double sided mounting tape with PVC backing, for photo polymer or rubber plates on cylinders of small diameter, when an immediate high adhesion is required. No edge lifting, also on small cylinders. High flexibility.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
PVC	Natural rubber	Transparent (brown paper liner)	0.100 mm	Ext: 9.5 N/25mm Int: 9.5 N/25mm	130 N/25mm	70 %	\

EUROGRAPHIC 781/10

Platemounting

**Thin film, yellow creped PVC liner**

Double sided mounting tape with PVC backing, for photo polymer or rubber plates on cylinders of small diameter, with immediate high adhesion. No edge lifting, also on small cylinders. High flexibility.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
PVC	Natural rubber	Transparent (yellow creped PVC liner)	0.100 mm	Ext: 9.5 N/25mm Int: 9.5 N/25mm	130 N/25mm	70 %	\

EUROGRAPHIC 781/20

Platemounting

**Medium thick film, dark brown creped liner**

Double sided mounting tape with PVC backing, for photo polymer or rubber plates on small diameter cylinders. Immediate high adhesion. No edge lifting on small cylinders. High flexibility.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
PVC	Natural rubber	Transparent (dark brown creped PVC liner)	0.200 mm	Ext: 9.5 N/25mm Int: 9.5 N/25mm	315 N/25mm	100 %	\



adhesive tapes catalogue

EUROGRAPHIC 781/30

Platemounting




High thick film, green creped PVC liner

Double sided mounting tape with PP backing, for photo polymer or rubber plates on cylinders of small diameter. Immediate high adhesion. No edge lifting on small cylinders. High flexibility.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
OPP	Natural rubber	Transparent (green creped PVC liner)	0.300 mm	Ext: 9.5 N/25mm Int: 9.5 N/25mm	175 N/25mm	900 %	\

BSP 700600-BAG SEALING PS

Fixing, mounting and fastening



Double sided central glue permanent bag sealing tape

Suitable for once-off sealing security bags, express delivery bags, confidential bags, garbage bags, the pet decoration bags and all kinds of plastic bags made of OPP, PP or PE materials.

BACKING	ADHESIVE	COLOUR	TOTAL THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
PET	Synthetic rubber	White (PP film liner)	0.060 mm	Ext: 7 N/25mm Int: 25.9 N/25mm	\	\	60° C

BSR 70120-BAG SEALING RE

Fixing, mounting and fastening



Double sided re-sealable bag sealing tape

Suitable for OPP and PP plastic bags. For use on bags, where non permanent sealing is required.

BACKING	ADHESIVE	COLOUR	THICKNESS	ADHESION	TENSILE STRENGTH	ELONGATION TO BREAK	TEMPERATURE RESISTANCE
PET	Acrylic	Transparent (LHDPE film liner)	0.020 mm	Ext: 7 N/25mm Int: 25.9 N/25mm	\	\	60°C