


SIGN	DATE	DESCRIPTION	APPROVER
▲	5/10	尺寸由5.2變更為4.2	DAWN
▲	5/10	尺寸由1.4變更為1.5	DAWN
▲			

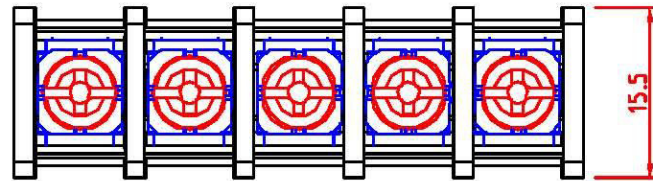

Materials Electrical

Rated:

Insulation Withstands Voltage:

Insulation Resistance:

Using Temperature Rang:

Screw Torque Value:

Suitable Electric Wire:

1) Molded parts:

2) Terminal:

3) Terminal Screws:

300V 25A

AC2000V/MIN

1000MΩ or More at DC500V

-40°C ~ +105°C



10kgf.cm

22-12 AWG

polyamide 66 UL94V-1 Black

Brass 0.8t Tin Plated

Steel M3.5 Ni Plated

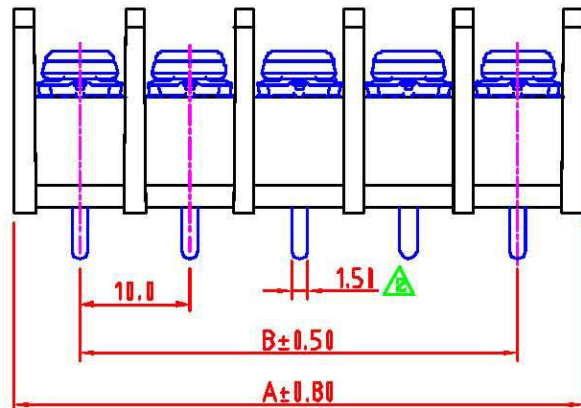

PDLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A		22.10	32.00	42.10	52.10	62.10	72.10	82.00	92.00	102.10	112.00	122.10	132.00	142.10	152.00	162.10
B		10.00	21.00	31.10	41.10	51.00	61.00	71.00	80.10	91.10	101.10	110.10	121.00	130.10	141.00	150.10
PDLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	172.10	182.10	192.10	202.10	212.00	222.10	232.10	242.10	252.10	262.00	272.10	282.00	292.10	302.00	312.00	322.00
B	160.10	171.10	181.10	191.10	201.10	211.10	221.10	231.10	241.10	251.00	261.10	271.00	280.10	290.00	300.10	310.10

SHALLIN ELECTRONICS CO., LTD.

PART NAME:

TITLE:

PART. NO.: X977Exx

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance
X. ±0.50
X.X ±0.30
X.XX ±0.10
X° ±1°

Shi Jun
2003.5.08

DAWN
2003.5.08



UNITS: mm
SCALE: 2/1
REVISION: B2