
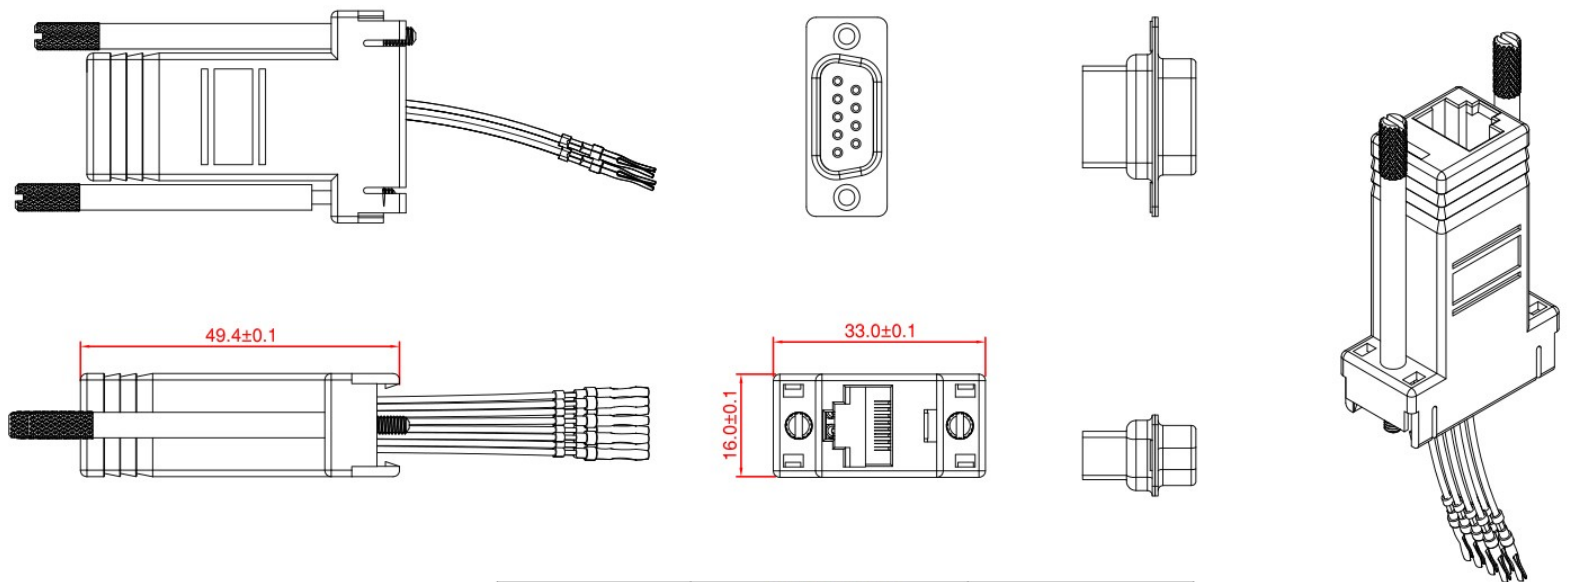




MATERIAL
PLASTIC : ABS
SCREW : NICKEL PLATING THUMB SCREW
LEAD WIRE: UL1061. 26AWG. 7 STRAND
CRIMP CONTACTS: COPPER GOLD PLATING
RJ45 CONTACTS: COPPER GOLD PLATING

	WIRE MAP		
	P1	BLUE	
	P2	ORANGE	
	P3	BLACK	
	P4	RED	
	P5	GREEN	
	P6	YELLOW	
	P7	BROWN	
RJ 45 JACK		UL1061	Receptacle Crimp Contacts

					材 料 MATERIAL	除特別註明外 UNLESS OTHERWISE SPECIFIED		日 期 DATE	2012/12/03	名 稱 TITLE	RJ45 JACK TO D-SUB ADAPTOR (Crimp Female)	
						單位 UNIT: mm	比例 SCALE 1:1					
						長度 LENGTH	公差 TOLERANCES					
						0.5-6	±0.05					
					表面處理 FINISH	6-120	±0.10	製 圖 DRAWING	BEN WENG	機 種 MODEL NO.	DB-9PIN母端子轉8P8C	
						120-315	±0.20					
						315-1000	±0.30					
						角度 ANGLES	0°-30°					
					去除毛邊及利角 REMOVE ALL BURRS AND SHARP EDGES	孔徑 HOLE DIAMETER	±0.10	核 對 CHECK	EMERSON	料 號 ITEM NO.	ZP09F8C	
						0.5-30	±0.10					
						30-100	±0.20					
						核 發 APPROVED	EMERSON					
修改 REVISE	說 明 DESCRIPTION	日 期 DATE	修改人 GHG.BY	核 對 CHECK						圖 號 DRAWING NO.	1 頁 之 1	