

5

4

3

2

1

F



E

D




C

B

A

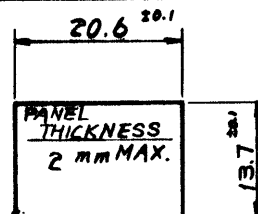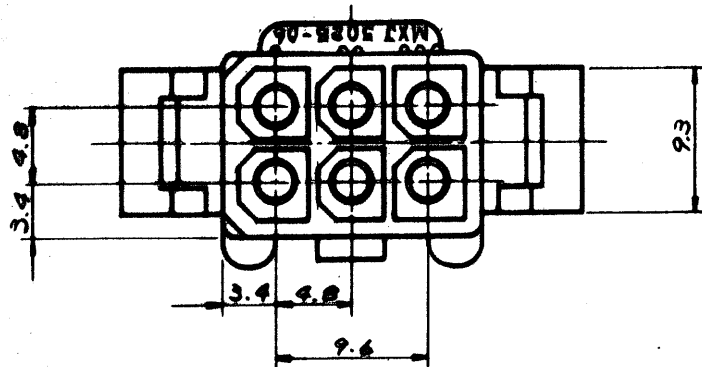

MOUNTING HOLE DETAIL
(SCALE 1:1)

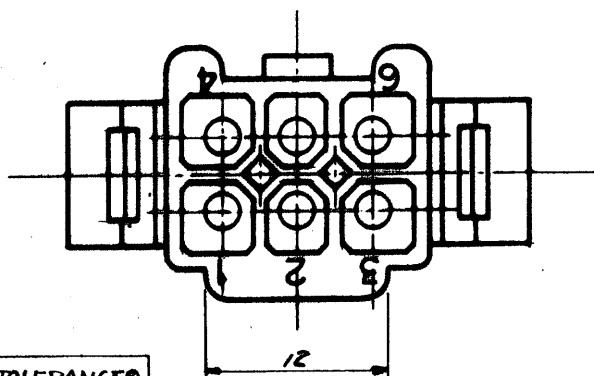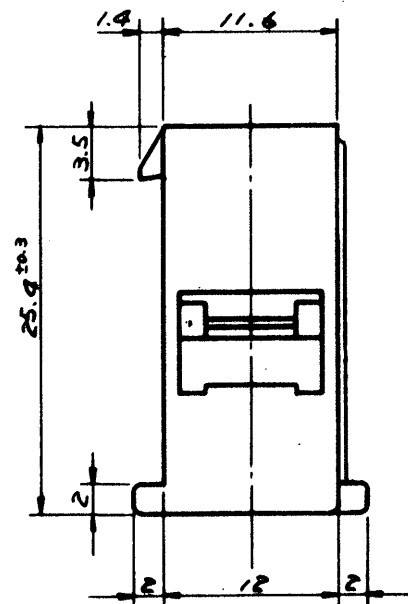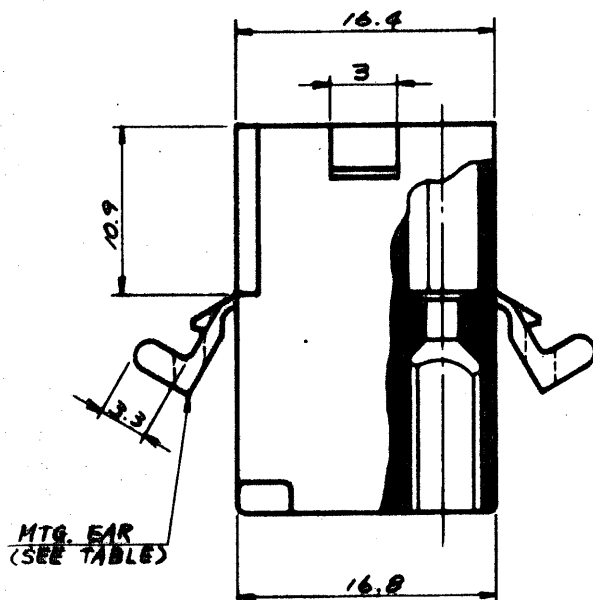

GENERAL TOLERANCES

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

	5025-06P1	NO
	5025-06P	YES
EDP NO.	ENG. NO.	MTG. EAR

D	ADDED -06P1 ECN NO. 917	7/5/77	1/1		
C	REMOVED 'X' ECN NO. 700	7/10/77	1/1		
B	リブ、110V/100Vト、サキト NO.	12/13/77	1/1		
A	REVISED	10/20/77	1/1		
0	PROPOSED	7/28/77	1/1		
記号 LTR	変更内容 (Rev.)	Date	Name		

公差 (Tolerances)
 .000 → ±0.005 .00 → ±0.05
 .0 → ±0.1 . → ±0.3

材料 (MAT'L)
 NYLON 66, 94V-2
 熱処理 (H.T.)
 HRc ———

仕上げ (Finish)
 ———

Scale 2/1 名称 (Name)

所要数 (Req)
 DRWG. Y. Amano 7/10/77
 DSN'D M. ENO MOTO 7/10/77
 CHK'D I. Shinzawa
 APP'D

MOLEX-JAPAN CO., LTD.
 日本モレックス株式会社

No. SD-5025-06P* REV. D

MINI. FIT CONN. 6POS. PLUG HSG.

5



4

3

2

1

F

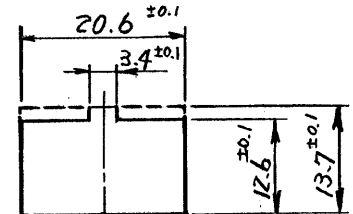
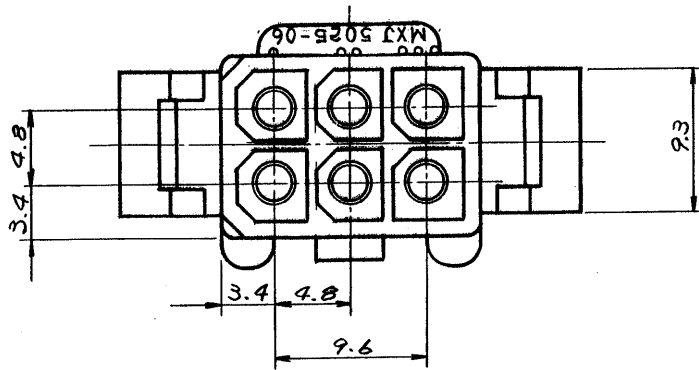


パネル板厚 2mm MAX

パネルスロット寸法
(SCALE 1:1)


E

D

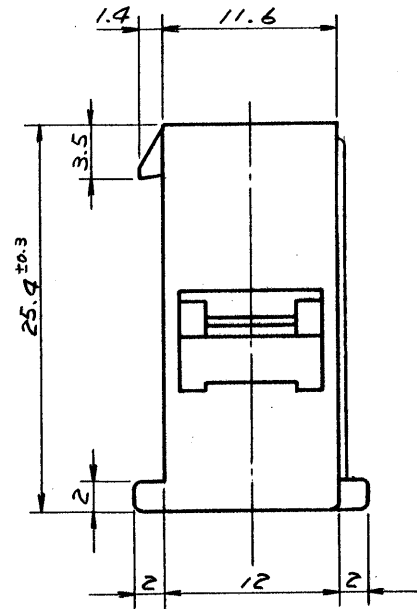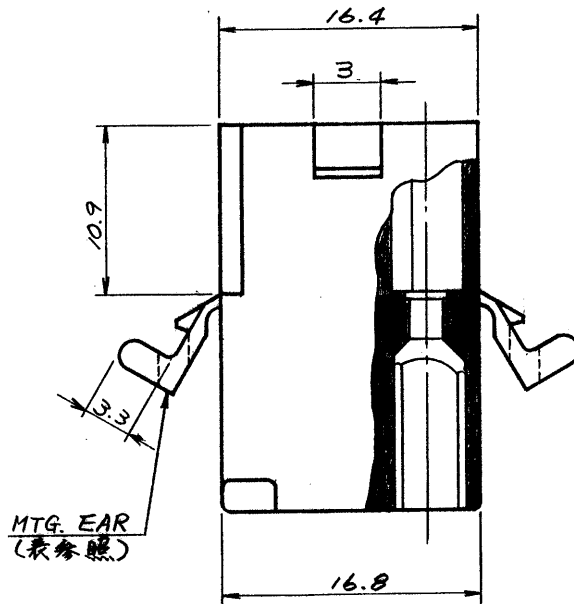

C

B

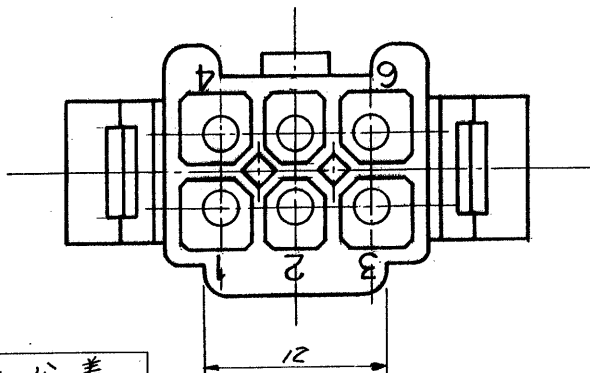

一般公差

10 未満	±0.2
10以上30未満	±0.25
30 以上	±0.3
角 度	±3°

A

15-31-1063	5025-06P1	無
15-31-1061	5025-06P	有
EDP NO.	ENG. NO.	MTG. EAR

公差 (Tolerances)				所要数		DRWG. Y. Amano 9/28/77	
.000 → ±0.005 .00 → ±0.05				(Req)		DSN'D MENDO MOTO 9/28/77	
.0 → ±0.1 . → ±0.3						CHK'D 128 Gino	
材料 (MAT'L)				APP'D W. M. M.		MOLEX-JAPAN CO., LTD.	
NYLON 66, 94V-Z				moLEX		日本モレックス株式会社	
熱処理 (H.T.)				No.		REV.	
HRc //				SD-5025-06P*		E	
仕上げ (Finish)				Scale 2/1		名称 (Name)	
MINI. FIT CONN. 6POS. PLUG HSG.				記号 (LTR)		変更内容 (Rev.)	
Date				Name			

E	REVISED	ECN NO. 1499	11/30/79	K.H.
D	ADDED	-06P1 ECN NO. 917	9/5/78	Y.
C	REMOVED	"X" ECN NO. 748	3/18/78	Y.
B	リブ、パネル/スロットサキ	NO. 12/9/77	12/9/77	Y.
A	REVISED		10/28/77	Y.
0	PROPOSED		9/28/77	Y.