
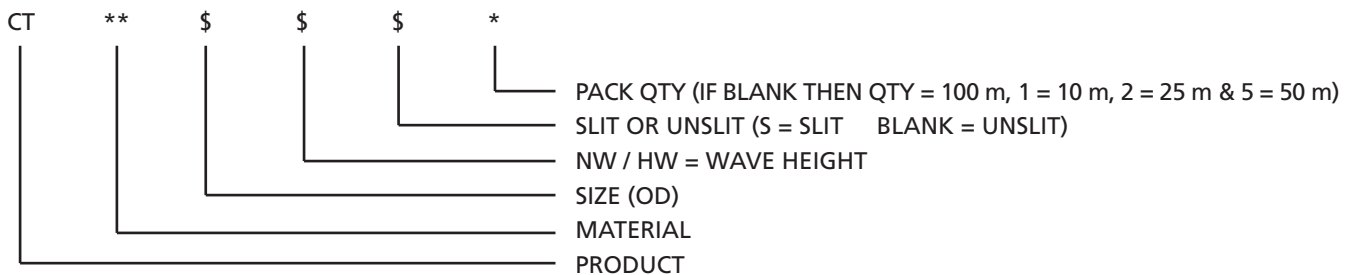
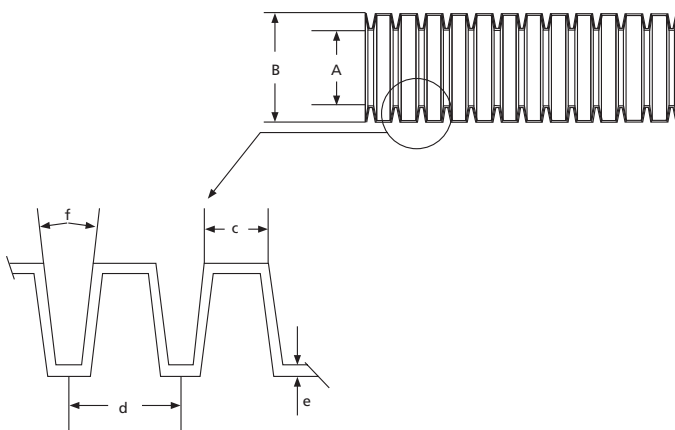


Convuluted Tubing continued

Automotive

The tubing is manufactured from a grade of Polypropelene that contains no heavy metals (lead) and is halogen free. This ensures a high quality, very flexible, environmentally acceptable product that meets the stringent requirements of sheathing for automotive wiring harnesses. The tubing is available in slit or un-slit form. Standard colour - black, but is available on request in mid-grey, white and orange. Operating temperature range is -40°C to 150°C continuously rated. The Polypropelene tubing has been tested and complies with various motor manufacturers specifications including Mazda, Fiat and Volkswagen. Copies of test certificates are available on request.

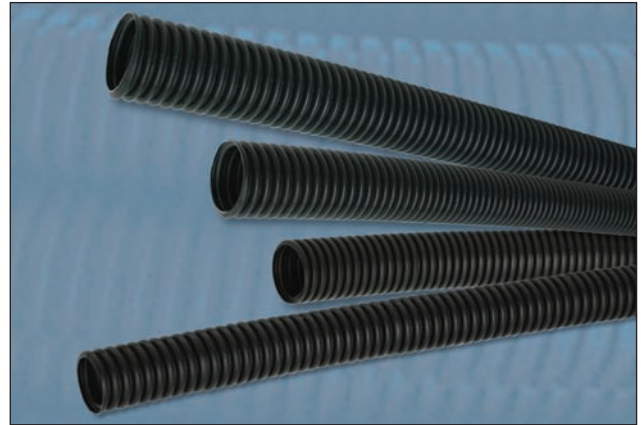

MATERIAL KEY: Polypropylene (P), Polyamide (A), PVC (V).

Available in Flame Retardant and Heat Resistant. Standard Colour - Black or Grey, others on request.

Technical Table

HT Part No	Nominal Size I.D. x O.D.	Dimensions (mm)					Angle	
		Tolerance - A	B	C	D	E	F	
\$=S for slit	(mm)	±0.4	±0.3	±0.1	±0.15	±0.1	±5°	
CTP7NW\$	7 x 10	6.9	9.6	1.8	2.6	0.15	11°	
CTP10NW\$	10 x 13	10.1	12.7	1.8	2.7	0.2	20°	
CTP13NW\$	13 x 16	12.9	15.8	1.8	2.7	0.2	11°	
CTP17NW\$	17 x 21	16.8	21.0	2.2	3.2	0.2	11°	
CTP22NW\$	22 x 26	21.8	25.5	2.2	3.1	0.2	11°	
CTP5HW\$	5 x 7	5.0	7.1	1.2	2.2	0.15	30°	
CTP9HW\$	9 x 13	8.5	12.9	2.1	3.14	0.2	18°	
CTP11HW\$	11 x 16	11.1	15.7	2.1	3.14	0.2	18°	
CTP15HW\$	15 x 21	15.0	21.2	2.7	3.9	0.2	12°	
CTP19HW\$	19 x 26	19.1	25.7	2.9	4.3	0.25	12°	

