
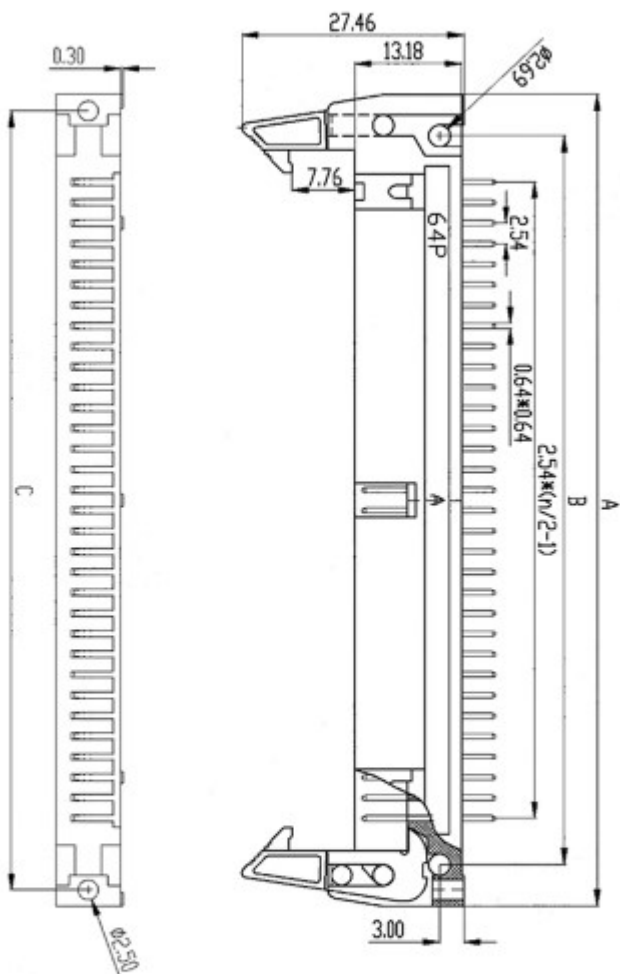




规格	尺寸A	尺寸B	尺寸C	
10P	31.88	21.60	27.83	无铜销
14P	36.96	26.68	32.91	
16P	39.50	29.22	35.45	
20P	44.58	34.30	40.53	
26P	52.20	41.92	48.15	
30P	57.28	47.00	53.23	
34P	62.36	52.08	58.31	
40P	69.98	59.70	65.93	
50P	82.68	72.40	78.62	
64P	100.46	90.18	96.41	
				无铜销 带铜销

技术参数	
耐电压:	500VAC/60S
接触电阻:	≤20mΩ
绝缘电阻:	≥1000mΩ
保持力:	≥20N/芯
可焊性:	≥95%面积
塑件:	PBT
焊针:	黄铜, 镀金