
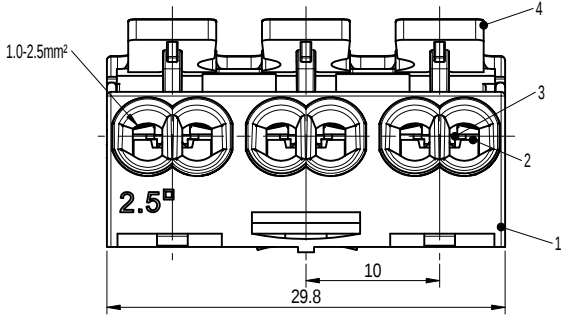
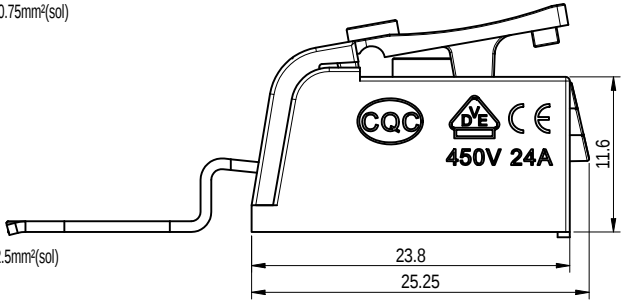
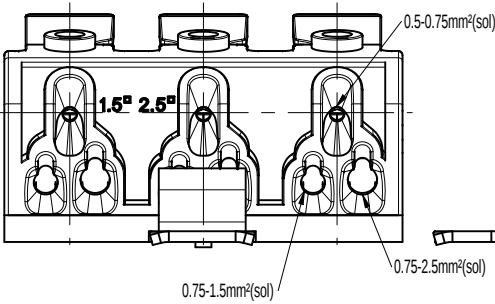
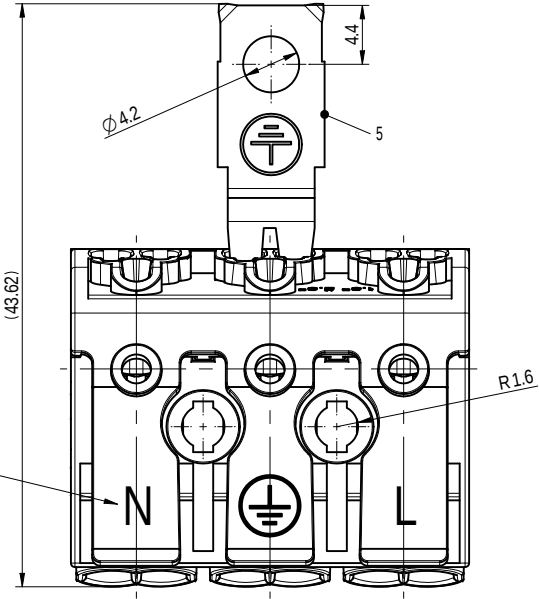


公差/General tolerances (mm)														0.1/10 ±2
0~3	>3~6	>6~10	>10~18	>18~30	>30~50	>50~80	>80~120	>120~180	>180~250	>250~315	>315~400	>400~500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

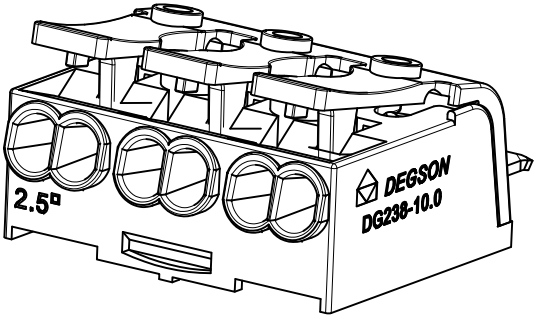

5	Ground pin	Copper alloy	Ni plated	
4	Cover	PA66	UL94V-2	
3	Clamp	Copper	Sn plated	
2	Spring	Stainless steel	/	
1	Housing	PA66	UL94V-2	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		600/20	/	600/5
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	450/24	/
工频耐压/Withstand voltage(V/1Min)		AC2500		
剥线长度/Stripping length(mm)		9~10		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

		MATERIAL: -		SURFACE/COLOR:	
APPD: 兰泰华		MAT NO./REV: 10060000992-1 / 00		MAT STATUS: 批量	
CHKD: 陈超		NAME		DG238-10.0-03P-19-06Z(H)	
DRFT: 袁路勇		DRAWING NO.		TYPE	
2023.08.25		200034146		CUSTOMER DRAWING	
2023.08.25		DRAWING STATUS		SCALE	
		已发布		2.5:1	
		SHEET		1/1	

00	ECN	DESCRIPTION	袁路勇	2023.08.25
REV	ECN	DESCRIPTION	DRFT	DATE