


## HOW TO ORDER:

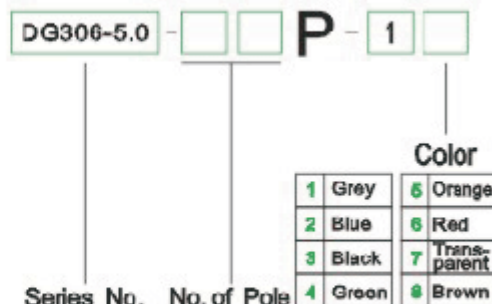

Model: DG306-5.0

Capability	
Rated voltage/Rated current	300V/10A
Wire range	22-14 AWG, 1.5 mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min
Insulation resistance	5000MΩ/1000V
Contact resistance	20 mΩ
Temp. Range	-30°C~+120°C
MAX Soldering	+250°C for 5 Sec
Torque	0.4Nm (3.6Lb.in)
Strip length	4.5-5 mm
Specification	
Housing	PBT, UL94V-0
Screws	M2.5, steel, Zinc plated
Wire guard	Stainless steel
Pin header	Brass, Tin plated