
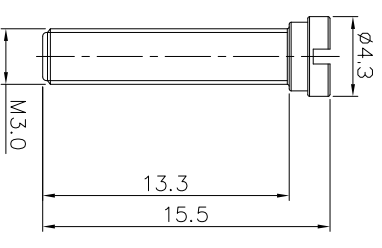


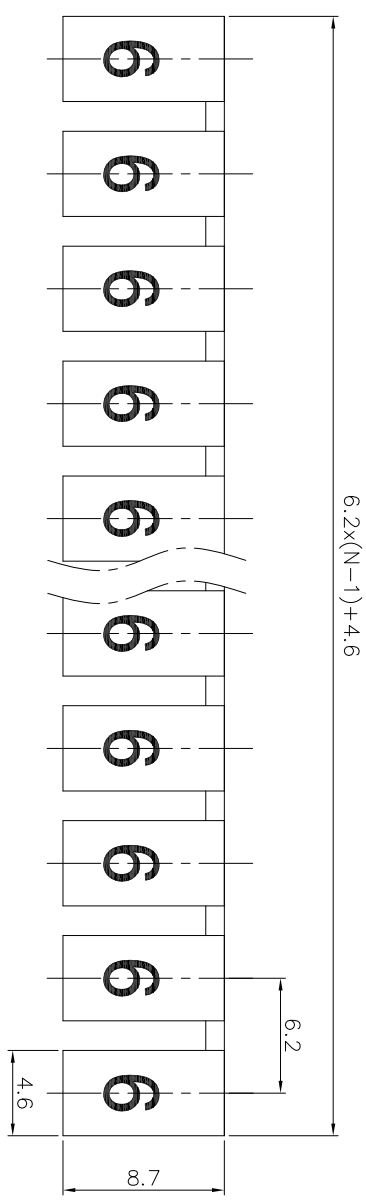



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

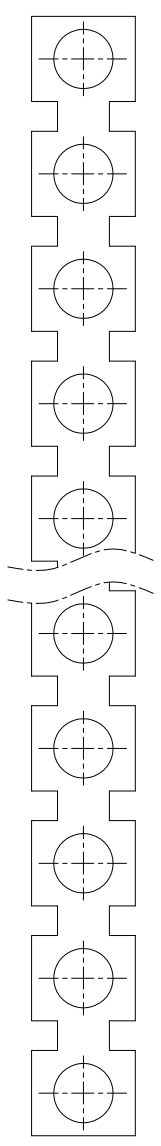

NOTES1:
 UL Standard
 1. Torque value : M3 , 4.43Lb.in
 IEC Standard
 1. Torque value : M3 , 0.5N.m


NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 6.2mm, Poles : N=02~10P
 3. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range						Tolerance
	Over	Over	Over	Over	Over	Over	
6 TO 10	6	10	10	30	60	100	0.1/10
10 TO 24	10	24	30	60	100	150	∠
24 TO 60	30	60	100	150	200	300	±2°

4. RoHS Compliance

Current carrier and screws should be packed individually, which must be put in the same box.

DETACHED LISTS		PART NO.:		NAME:		TITLE:		REV	DATE
APPD:	/	/		NINGBO DEGSON ELECTRICAL CO., LTD		CUSTOMER DRAWING		DO	1/1
CHKD:	/	/		FBIXX-6		/		SHEET	1/1
DRFT:	/	/		/		/		SCALE	1:1



THIRD ANGLE PROJECTION

DRAWING NO.:
 MM (INCH)

DO NOT SCALE DRAWING