


## HXYP-5S-BM15

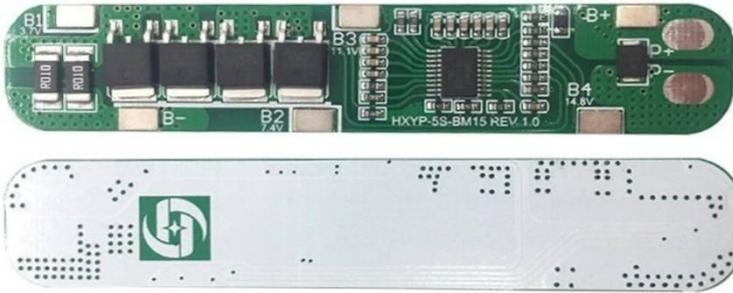

### Specification:

Model: HX-5S-BM15

Size: 89\*17.7\*3.6mm

Overcharge voltage range:  $4.25\text{v}\pm 0.05\text{v}$

Over-discharge voltage range:  $2.8\text{v}\pm 0.05\text{v}$

Maximum operating current: 15A

Upper limit instantaneous current: 25A

Quiescent current:  $<30\mu\text{A}$

Charging voltage: 21V

Short circuit protection: Protected, Delayed self-recovery

### Note:

This protection board cannot be used for Xenon lights, electric drill battery packs, electric bicycle battery packs, children's car batteries, motorized equipment.

P- P+ is the same charge and discharge port.

