

SPECIFICATIONS

Current Rating: 3A
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -40°C to +105°C

MATERIAL

Contact: Brass
 Insulator: PBT, UL94V-0



ORDER INFORMATION

J L 25 X 1 - XX X


Straight Type Pitch 2.54mm PBT No. of Contacts

Y:Tray
 T:Tube
 P:Cap+Tube
 R:Cap+Reel

G0:Gold Flash	S0:Selective Flash
G1:Gold 3u"	S1:Selective 3u"
G2:Gold 5u"	S2:Selective 5u"
G3:Gold 10u"	S3:Selective 10u"
G4:Gold 15u"	S4:Selective 15u"
G5:Gold 30u"	S5:Selective 30u"

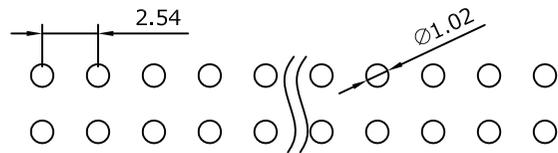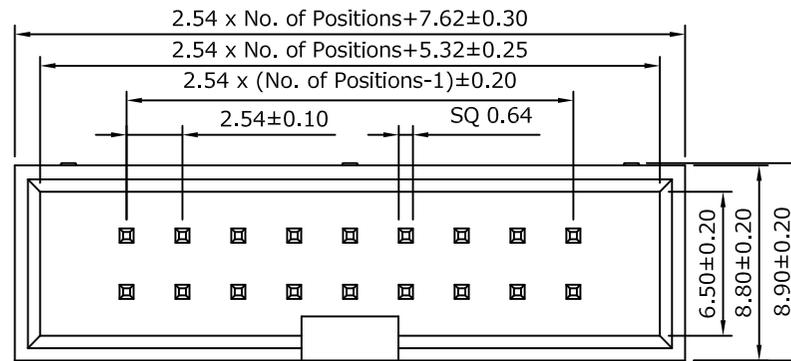

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

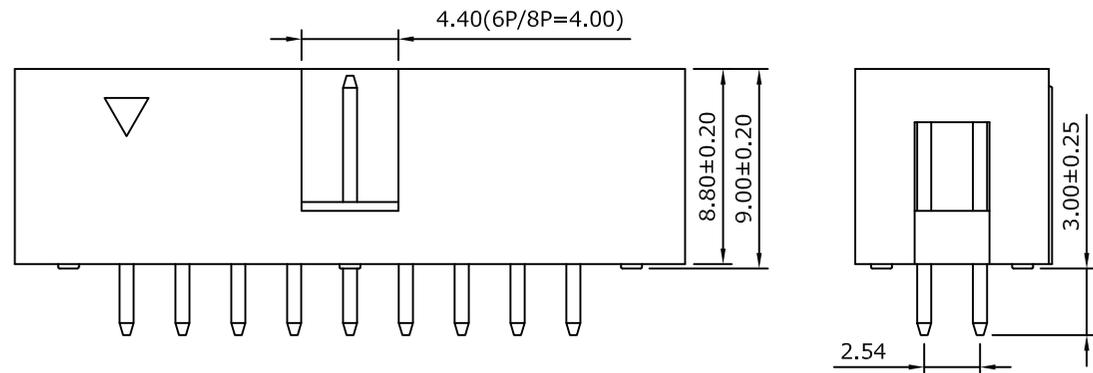

PART NO.	JL25X1-XXX	DRAWN	Andrew
DRAWING NO.	JL25X1-XXX	CHECKED	Claudia
DATE	2006/12/15	APPROVED	Brian

TITLE:	Box Header 2.54mm	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	-------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	-------------	------