



PRECISION CAPACITORS

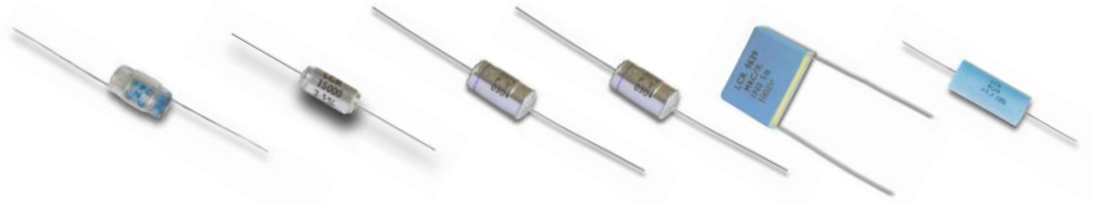

LCR TYPE	FPC	FSC	FSC/EX	FPC/EX	MKC/R	MKC/PC
RATED DC VOLTAGE AC	160 - 630 VDC	30 - 630 VDC	63 - 630 VDC	63 - 630 VDC	63 - 400 VDC	63 - 400 VDC
CAPACITANCE RANGE	1 - 150 nF	25 pF - 200 nF	47 pF - 100 nF	47 pF - 100 nF	0.01 - 22 μ F	0.01 - 22 μ F
CAPACITANCE TOLERANCE $\pm\%$	1%, 2.5%, 5%, 10%, 20%	1%, 2.5%, 5%, 10%, 20%	1%, 2.5%, 5%, 10%, 20%	1%, 2.5%, 5%, 10%, 20%	0.5%, 1%, 2%, 5%	0.5%, 1%, 2%, 5%
TERMINATION	AXIAL LEADS	AXIAL LEADS	AXIAL LEADS	AXIAL LEADS	10.2 - 27.9mm	AXIAL LEADS
CLIMATIC CATEGORY	40-085-21	40-085-56	40-070-56	40-085-56	55-085-56	40-100-21
PULSE RISE TIME dV/dT	>100V/ μ s	>1000V/ μ s	>1000V/ μ s	>1000V/ μ s	10 - 50V/ μ s	10 - 50V/ μ s
HOUSING	POLYPROPYLENE	POLYSTYRENE	POLYSTYRENE	POLYPROPYLENE	POLYCARBONATE	POLYCARBONATE

PRECISION/AUDIO CAPACITORS (+ HV)

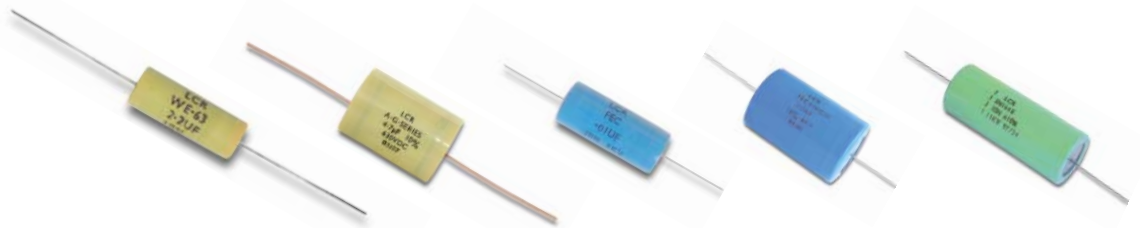

LCR TYPE	MKC/WE	AG SERIES	FEC	FEC/HV	FMC/T
RATED DC VOLTAGE AC	30 - 400 VDC	160 - 630 VDC	160 - 4 KVDC	4.1 - 40 KVDC	7.5 - 30 KVDC
CAPACITANCE RANGE	0.1 - 22 μ F	1 - 250 μ F	1 nF - 100 nF	1 nF - 100 nF	1 nF - 10 nF
CAPACITANCE TOLERANCE $\pm\%$	0.5%, 1%, 2%, 5%	1%, 2.5%, 5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%	10%
TERMINATION	AXIAL LEADS	AXIAL LEADS	AXIAL LEADS	AXIAL LEADS	AXIAL LEADS
CLIMATIC CATEGORY	40-085-21	40-085-21	40-100-21	40-85-21	25°C/75°C
PULSE RISE TIME dV/dT	10 - 50V/ μ s	10 - 50V/ μ s	1000 - 2000V/ μ s	1000 - 2000V/ μ s	10,000V/ μ s
DIELECTRIC	POLYCARBONATE	POLYPROPYLENE	POLYESTER	POLYESTER	MIXED DIELECTRIC