



REVISION RECORD			
REV	ECN	DRFT	DATE

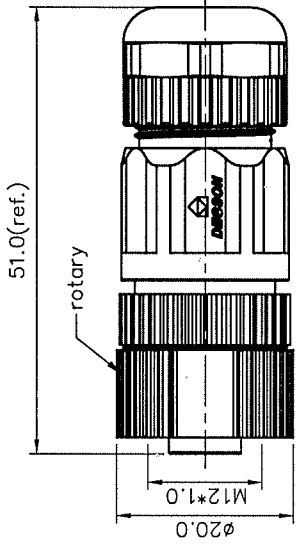

Plastic

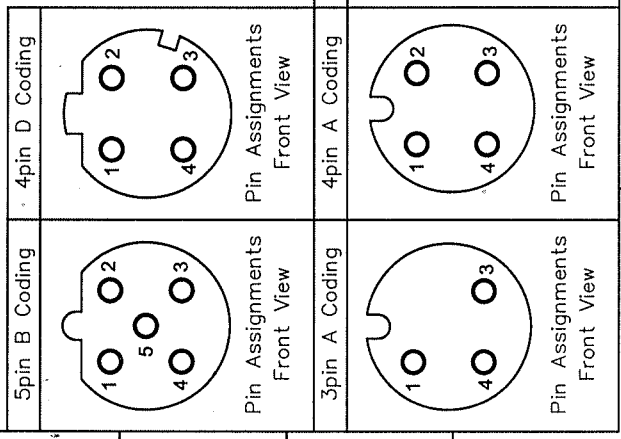

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire range :
3pin A: 24~20AWG/0.25~0.52mm²
4pin A: 24~20AWG/0.25~0.52mm²
5pin A: 24~20AWG/0.25~0.52mm²
6pin A: 24~22AWG/0.25~0.34mm²
8pin A: 24~22AWG/0.25~0.34mm²
5pin B: 24~20AWG/0.25~0.52mm²
4pin D: 24~20AWG/0.25~0.52mm²
- Cable OD: 4~8mm
- Wire connection mode: screw
- Operating temperature: -25°C~+105°C
- RoHS Compliance

PART NO: PBM12XXXPFSL700100AH	NAME NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	
CHKD:	
DRFT: LZ 2018.10.08	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION	DRAWING NO: XXXXXXX-XX-CXX
	DO NOT SCALE
	DRAWING SCALE: 1:1
	SHEET: 1/1
	REV: D0-1