

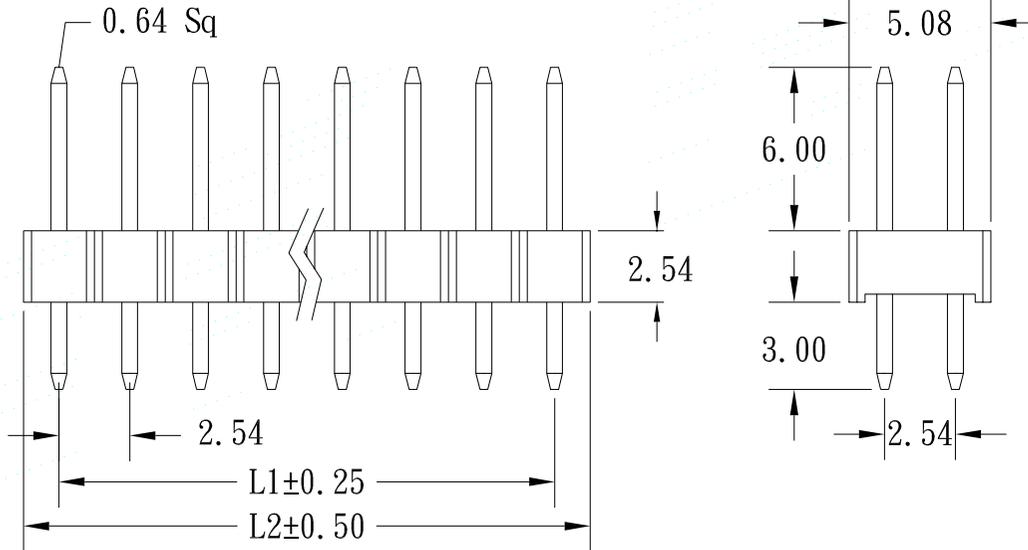


Dimensional & Ordering Information:

Circuits	Dimension mm	
	L1	L2
2x2	2.54	5.08
2x3	5.08	7.62
2x4	7.62	10.16
2x5	10.16	12.70
2x6	12.70	15.24
2x7	15.24	17.78
2x8	17.78	20.32
2x9	20.32	22.86
2x10	22.86	25.40
2x11	25.40	27.94
2x12	27.94	30.48
2x13	30.48	33.02
2x14	33.02	35.56
2x15	35.56	38.10
2x16	38.10	40.64
2x17	40.64	43.18
2x18	43.18	45.72
2x19	45.72	48.26
2x20	48.26	50.80
2x21	50.80	53.34
2x22	53.34	55.88
2x23	55.88	58.42
2x24	58.42	60.96
2x25	60.96	63.50
2x26	63.50	66.04
2x27	66.04	68.58
2x28	68.58	71.12
2x29	71.12	73.66
2x30	73.66	76.20
2x31	76.20	78.74
2x32	78.74	81.28
2x33	81.28	83.82
2x34	83.82	86.36
2x35	86.36	88.90
2x36	88.90	91.44
2x37	91.44	93.98
2x38	93.98	96.52
2x39	96.52	99.06
2x40	99.06	101.60

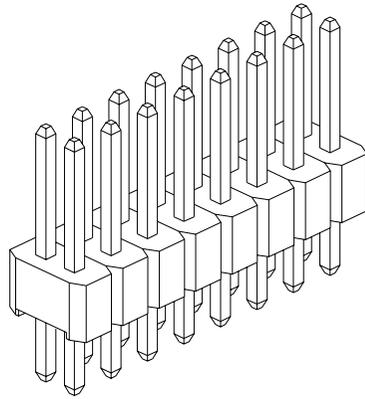

Recommended
P. C. Board
Hole Layout

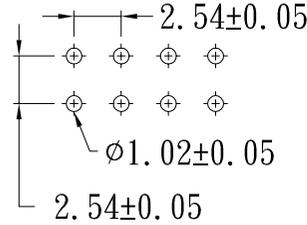

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	APR. 02. 01
B		ADD TIN FLASH	JAN. 25. 02
C		ADD FINISH TYPE	APR. 02. 01

APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Mate with Mini Jumper and P.C. Board connectors e.g.

SPECIFICATIONS

- *Current Rating: 3 Amps
- *Insulator resistance: 5000 Megohms Min.
- *Dielectric withstanding: AC 500 V
- *Voltage: AC 250 V
- *Operating Temperature: -40° - +105°C
- *Contact Material: Brass
- *Insulator Material: Standard:P. B. T
- *Finish:
 - G = All Gold Plated
 - T = All Tin Plated
 - H = Tin Plated on Terminal & Gold Plated on Contact

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		
LINEAR	ANGLE	UNITS	TITLE	PART NO.
X. ±	X° ±	MM	2.54MM PIN HEADER	PHDS**G(T)(H)11
.X ± 0.38	.X° ±			
.XX ± 0.25	.XX° ±		SCALE	IPART NO
.XXX±	.XXX°±	SIZE	A4	SHEET 1 OF 1
APPD				圖面編號: SD0655-C(1)
CHKD				
DRAW	Tao. Tao.	JAN. 20. 2003		