

PIN HEADER 180° DIP TYPE (2.54MM PITCH)




MATERIAL

- *Insulator : Polyester (UL94V-0)
- *Contact Pin : Brass
- *Contact Plated : Gold over Nickel or Tin
- *Color : Black

SPECIFICATION

- *Current Rate : 3A
- *Operation Temperature : - 40°C to + 105°C
- *Dielectric Withstanding : AC 500V
- *Voltage : AC 250V
- *Insulation Resistance : 500MΩ Min.

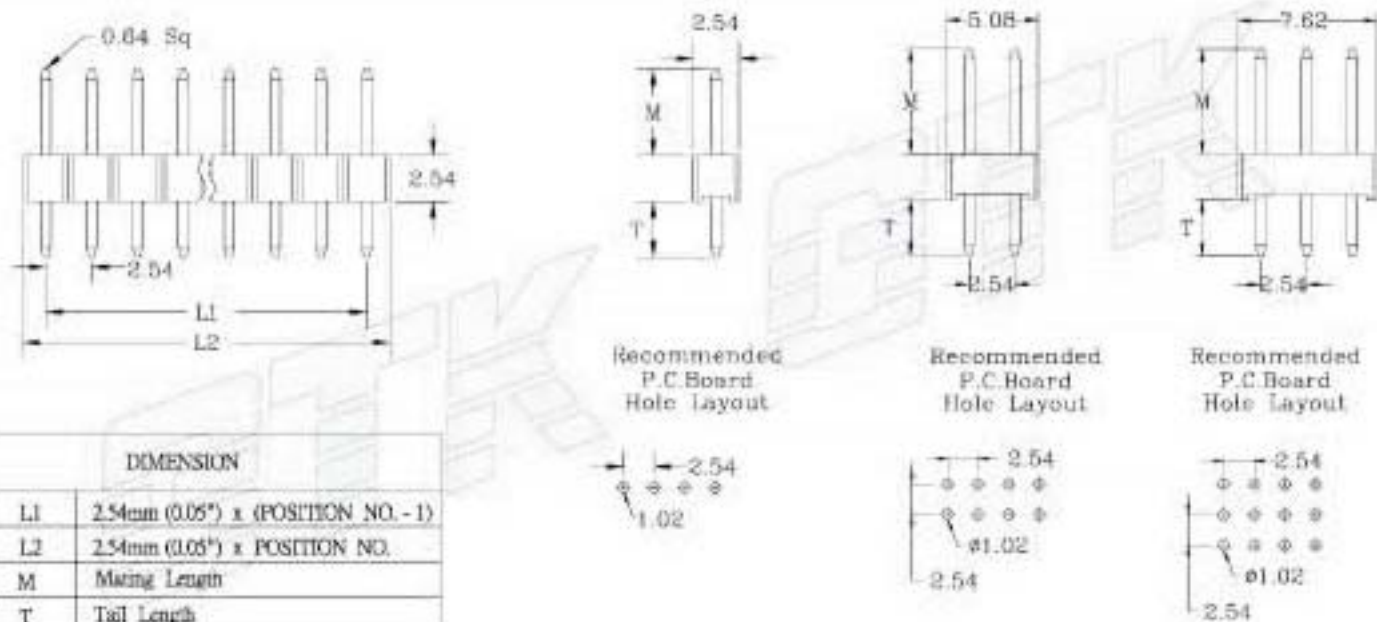

UNIT : mm

Ordering Information STANDARD DIMENSION : SHOW P/N END TO CODE #7
 SPECIAL DIMENSION : KEEP SHOWING CODE #8-#11 (PS. 標準碼為7碼, 第8-11碼視需要加註於標準碼後)

PH	S	S	10	G	1	0	/	**	/	**	-	**	-	5V
1	2	3	4	5	6	7		8		9		10		11

1. SERIES NO (產品系列)
 PH = PIN HEADER (排針)

2. ROW TYPE (排別)
 S = SINGLE ROW (單排)
 D = DOUBLE ROW (雙排)
 T = TRIPLE ROW (三排)

3. TERMINAL TYPE (端子類別)
 S = STRAIGHT TYPE (180°)

4. NO. OF PIN (端子數)
 01 TO 40 (SINGLE ROW 單排)
 04 TO 80 (DOUBLE ROW 雙排)
 09 TO 120 (TRIPLE ROW 三排)

5. CONTACT PLATED (端子電鍍)
 T = ALL TIN PLATED (全鍍錫)
 G = ALL GOLD PLATED (全鍍金)
 H = TIN PLATED ON TERMINAL
 & GOLD PLATED ON CONTACT
 (鍍半金鍍)

6. PITCH - PIN TO PIN (端子距離)
 1 = 2.54MM

7. PITCH - ROW TO ROW (排距)
 0 = SINGLE ROW ONLY (單排適用)
 1 = 2.54MM DIP

8. SPECIAL MATING (特殊上針長度)
 STANDARD : 6.0 MM

9. SPECIAL TAIL (特殊下針長度)
 STANDARD : 3.0 MM

10. SPECIAL PLASTIC HEIGHT
 (特殊塑膠高度)
 STANDARD : 2.54 MM

11. PULL OUT PIN (拔PIN)
 * V = NO. OF PIN