


SC0526GL



Dimension

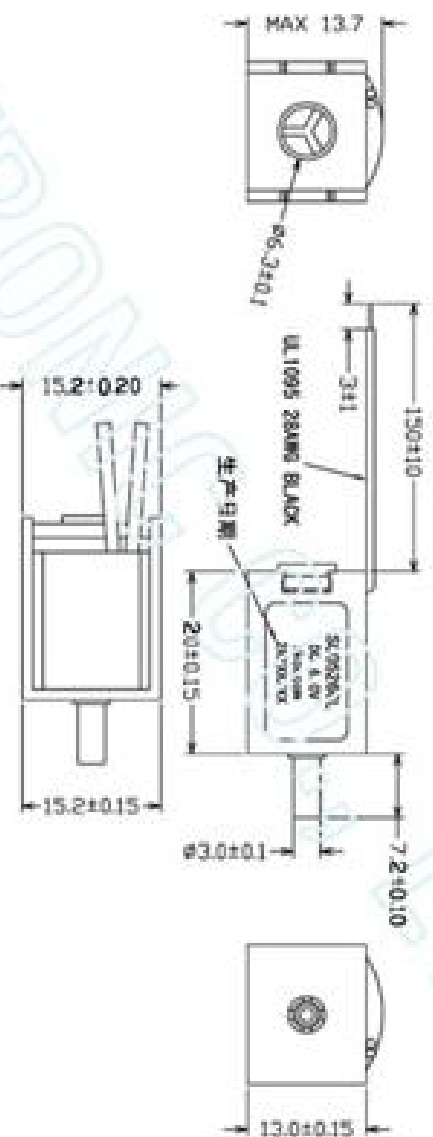

Specifications

Rated Voltage	DC3.0V	DC6.0V	DC12.0V
Rated Current	65mA	57mA	45mA
Resistance	45Ω ± 10%	105Ω ± 10%	270Ω ± 10%
Exhaust Time	Max 3.0 seconds from 300mmHg reduce to 15 mmHg at 100CC tank.		
Leakage	Max 3mmHg/min from 300mmHg at 100CC tank.		
Insulation Level	A		
Apply For	Air		
Life Test	200, 000 Times		
Environment	0~50 °C, 75% RH		